

UDC 55
CODEN – GEOME 2

In print: ISSN 0352–1206
On line: ISSN 1857–8586

GEOLOGICA MACEDONICA

<i>Geologica Macedonica</i>	Vol.	31	No	1	pp.	1–102	Štir	2017
<i>Geologica Macedonica</i>	Год.		Број		стр.		Штип	

<i>Geologica Macedonica</i>	Vol.	31	No	1	pp.	1–102	Štip	2017
<i>Geologica Macedonica</i>	Год.		Број		стр.		Штип	

GEOLOGICA MACEDONICA

Published by: – Издава:

"Goce Delčev" University in Štip, Faculty of Natural and Technical Sciences, Štip, Republic of Macedonia
 Универзитет „Гоце Делчев“ во Штип, Факултет за природни и технички науки, Штип, Република Македонија

EDITORIAL BOARD

Todor Serafimovski (R. Macedonia, *Editor in Chief*), **Blažo Boev** (R. Macedonia, *Editor*),
 David Alderton (UK), Tadej Dolenc (R. Slovenia), Ivan Zagorchev (R. Bulgaria), Wolfgang Todt (Germany),
 acad. Nikolay S. Bortnikov (Russia), Clark Burchfiel (USA), Thierry Augé (France), Todor Delipetrov (R. Macedonia),
 Vlado Bermanec (Croatia), Milorad Jovanovski (R. Macedonia), Spomenko Mihajlović (Serbia),
 Dragan Milovanović (Serbia), Dejan Prelević (Germany), Albrecht von Quadt (Switzerland)

УРЕДУВАЧКИ ОДБОР

Тодор Серафимовски (Р. Македонија, *главен уредник*), **Блажо Боев** (Р. Македонија, *уредник*),
 Дејвид Олдертон (В. Британија), Тадеј Доленец (Р. Словенија), Иван Загорчев (Р. Бугарија),
 Волфганг Тод (Германија), акад. Николај С. Бортников (Русија), Кларк Барчфил (САД), Тиери Оже (Франција),
 Тодор Делипетров (Р. Македонија), Владо Берманец (Хрватска), Милорад Јовановски (Р. Македонија),
 Споменко Михајловиќ (Србија), Драган Миловановиќ (Србија), Дејан Прелевиќ (Германија),
 Албрехт фон Квад (Швајцарија)

Language editor	Лектура
Marijana Kroteva (English)	Маријана Кротева (англиски)
Georgi Georgievski (Macedonian)	Георги Георгиевски (македонски)
Technical editor	Технички уредник
Blagoja Bogatinoski	Благоја Богатиноски
Proof-reader	Коректор
Alena Georgievska	Алена Георгиевска

Address	Адреса
GEOLOGICA MACEDONICA EDITORIAL BOARD	GEOLOGICA MACEDONICA РЕДАКЦИЈА
Faculty of Natural and Technical Sciences P. O. Box 96	Факултет за природни и технички науки пошт. фах 96
МК-2000 Štip, Republic of Macedonia	МК-2000 Штип, Република Македонија
Tel. ++ 389 032 550 575	Тел. 032 550 575
E-mail: todor.serafimovski@ugd.edu.mk	

400 copies Тираж: 400
 Published twice yearly Излегува два пати годишно

Printed by: Печати:
 2nd Avgust – Štip 2nd Avgust – Штип

Price: 10 € Цена: 500 ден.
 The edition is published in June 2017 Бројот е отпечатен во јуни 2017

<i>Geologica Macedonica</i>	Vol.	31	No	1	pp.	1–102	Štip	2017
<i>Geologica Macedonica</i>	Год.		Број		стр.		Штип	

TABLE OF CONTENTS

319. Ivan Boev, Ajka Šorša, Goran Tasev, Dalibor Serafimovski, Blažo Boev Mineralogy and geochemistry of trace elements from Crven Dol – Alšhar deposit (Republic of Macedonia).....	5–20
320. Patrick Forward, Mitko Ligovski, Robert Davies Resource modelling at the Ilovica-Štuka porphyry copper-gold deposit, eastern Macedonia	21–40
321. Alexander Volkov, Todor Serafimovski, Andrew Galymov, Alexey Leksin Prospects of discovery new deposits of lead and zinc in the Republic of Macedonia	41–48
322. Hamid Sabbaghi, Ali Moradzadeh, Hooshang Asadi Haroni ASTER spectral analysis for host rock associated with porphyry copper-molybdenum mineralization.....	49–65
323. Lidja Kurešević, Olivera Vušović, Ivana Delić-Nikolić Geology of gemstone deposit Ugljarevac (central Serbia) and contributions to genetic model.....	67–76
324. Trajče Stafilov, Robert Šajn, Laura Ahmeti Spatial distribution of zinc in soil from the city of Skopje and its environs, Republic of Macedonia	77–85
325. Igor Peševski, Elena Angelova, Tamara Jovanovska, Sead Abazi, Jovan Papić, Violeta Stefanova Basic geotechnical parameters of metallic mineral deposits in the Republic of Macedonia.....	87–99
Instructions to authors	101–102

<i>Geologica Macedonica</i>	Vol.	31	No	1	pp.	1–102	Štip	2017
<i>Geologica Macedonica</i>	Год.		Број		стр.		Штип	

СОДРЖИНА

319. Иван Боев, Ајка Шорша, Горан Тасев, Далибор Серафимовски, Блажо Боев Минералологија и геохемија на елементите во траги во Црвен Дол – наоѓалиште Алшар (Република Македонија)	5–20
320. Патрик Форворд, Митко Лиговски, Роберт Дејвис Моделирање на рудните резерви во порфирското наоѓалиште на бакар и злато „Иловица-Штука“ во источна Македонија	21–40
321. Александер Волков, Тодор Серафимовски, Ендрју Галимов, Алексеј Лексин Перспективи за откривање нови наоѓалишта на олово и цинк во Република Македонија	41–48
322. Hamid Sabbaghi, Ali Moradzadeh, Hooshang Asadi Haroni Спектрална анализа АСТЕР на карпите во кои има асоцијации на порфирската бакарно- молибденска минерализација	49–65
323. Лидја Курешевиќ, Оливера Вушовиќ, Ивана Делиќ-Николиќ Геолошки карактеристики на наоѓалиштето на скапоцени камења Угљаревац (централна Србија) и придонеси за генетски модел	67–76
324. Трајче Стафилов, Роберт Шајн, Љаура Ахмети Просторна дистрибуција на цинк во почвите од градот Скопје и неговата околина, Република Македонија.....	77–85
325. Игор Пешевски, Елена Ангелова, Тамара Јовановска, Сеад Абази, Јован Папиќ, Виолета Стефанова Основни геотехнички параметри на наоѓалишта на металични минерални суровини во Република Македонија	87–99
Упатство за авторите	101–102

BASIC GEOTECHNICAL PARAMETERS OF METALLIC MINERAL DEPOSITS IN THE REPUBLIC OF MACEDONIA

Igor Peševski¹, Elena Angelova², Tamara Jovanovska³, Sead Abazi¹,
Jovan Papić¹, Violeta Stefanova⁴

¹*Faculty of Civil Engineering, "Ss. Cyril and Methodius" University in Skopje,
Partizanski odredi 24, MK-1000, Skopje, Republic of Macedonia*

²*Geohydroconsulting, Bagdadska 36A, MK-1000, Skopje, Republic of Macedonia*

³*Postgraduate student – Institute of Civil Engineering, "Peter the Great" Polytechnical University,
Polytechnicheskaya St. 29, Saint-Petersburg, Russian Federation*

⁴*Faculty of Natural and Technical Sciences, Institute of Geology, "Goce Delčev" University in Štip,
Blvd. Goce Delčev 89, Štip, Republic of Macedonia
peševski@gf.ukim.edu.mk*

A b s t r a c t: This paper deals with the analysis of basic geotechnical properties of monolithic rock samples from several metallic mineral deposits in the Republic of Macedonia. Namely, results from geotechnical investigation on samples from the deposits of Ilovica, Borov Dol, Kazan Dol, Plavica, Kadiica and Bučim were subject of the work presented herein. Over 800 different geotechnical tests have been performed on samples from different depths and zones of these deposits. The most frequently performed basic tests during geotechnical investigation phases included: point load index tests, unconfined compression tests, unit and specific weight, porosity, shear strength along joints. All data is statistically analyzed and certain conclusions for different geotechnical parameters are achieved. Special attention is paid to the vertical distribution of the parameter's values, since this is of greatest interest for the mining planning and processes. Differences among certain deposits are discussed and certain conclusions and recommendations for further investigations are presented. We note that this is a first attempt to analyze such amount of geotechnical data from metallic mineral deposits in Macedonia, and the herein presented correlations are to be updated as new data is collected.

Key words: geotechnical properties; metallic mineral deposits; statistical analysis; vertical distribution

INTRODUCTION

Rock mechanics, or to be more exact, *Mining rock mechanics*, as a sub-discipline in geotechnics has had profound influence on the mining industry throughout history (Brady and Brown, 2006). In general, the knowledge of geotechnical properties of rock masses in metallic and nonmetallic mineral deposits is of high importance for the economy of the mining process, safety of works and environmental protection.

Many aspects of mining (during design process and during exploitation) depend on the geotechnical characterization of both the ore bearing as well as surrounding waste rock. To be more precise, geotechnical characterization is essential for successful fulfilling of the following design stages and phases of exploitation/mine life:

– Design of working and final slope angles at open pit mines.

- Design of support in underground mines.
- Design of tailing dams and civil engineering structures from waste rock.
- Determination and control of excavation, loading and transport conditions.
- Determination and control of rock durability with time in relation to environmental protection.
- Determination of the possibility to use waste rock for road or embankment construction.
- Determination of tailing dams stability and their monitoring.
- Foundation of structures in zone of mines.
- Stress and deformation analyses.
- Monitoring of the rock mass performance.
- Rock support and reinforcement design.
- Rock related risk management.
- Design of access and haul roads.
- Design of protective measures for workers.

As it can be noticed and also stated by McG Robertson and Caldwell (n.d.), mining process starts with geotechnical analyses and design, regardless of the type of mining. Moreover, it ends with geotechnics as it is needed to deal with the waste material and the safety of the mines throughout and after the exploitation phase. The importance and value of the geotechnical investigations and tests and their statistical analysis in general and not only for metallic mineral deposits are stressed by many authors. Geotechnical engineering in mining involves many tasks, as listed above, due to which there are numerous geotechnical guidelines specifically for mining, such as the ones given separately for open pit and underground mines recommended by the Government of Western Australia (Department of Minerals and Energy, 1999, and Department of Industry and Resources, 1997). On the other hand, Blight, Troncoso and Fourie (2000) analyze some of the geotechnical issues in mining.

Adamczyk (2012) points out that the material properties change with transportation, handling, compaction and weathering of the material. The same author presents changes in particle size distribution and moisture with time, which affects the geotechnical parameters. Even though that paper is dedicated to coal deposits it stresses the significance of geotechnical parameters' alteration with time. Regarding metallic mineral deposits,

Yan et al. (2011) present results from testing of strength parameters of rocks from lead, zinc and gold mine. Also Bieniawski (1974) shows a practical approach for determination of the strength properties of rock materials and lists the influencing factors. The factors upon which the shear strength of rocks depends, weathering importance and stability are also described by McLemore et al. (2009). Furthermore, results from large in situ shear tests on rock piles from the surface layer of Questa Molybdenum Mine are presented by Boakye (2008).

Considering the size of a mine, there is usually a large amount of waste material to handle. Therefore, in many cases part of it is used to build the containing structure. However, the material should satisfy the requirements of aggregate for this kind of structure. This topic is analyzed in details by many authors among which Smith and Colhs (2001).

The geotechnical parameters of the rock masses have large variations from deposit to deposit, and in most cases, even within a particular deposit. This is the main goal of this paper, to show the variation of the geotechnical parameters in some metallic mineral deposits in the Republic of Macedonia. It should be noted that, except the active mine for the deep deposit Bučim, all the other deposits are in phase of detailed geological investigations.

GENERAL GEOLOGICAL OVERVIEW OF ANALYZED METALLIC MINERAL DEPOSITS

In the past decade in the Republic of Macedonia there have been intensive geological investigations for new metallic as well as nonmetallic mineral deposits, where certain amount of geotechnical works has been done. Here belong the deposits: Ilovica–Štuka near town of Strumica, Borov Dol and Bučim near town of Radoviš, Kazan Dol near Valandovo, Plavica near Kratovo and Kadiica near Pehčevo (Figure 1).

The Plavica deposit is a part of the well known Kratovo–Zletovo ore area that in general is characterized with a complex composition of mainly Tertiary volcanic-sedimentary complex. It is imposed on the foundation of the Serbian-Macedonian massif, which represents constitutive part of the western Tethyan belt. K/Ar radiometric data (Karamata et al., 1992; Serafimovski, 1990) yield an age of 32–16 Ma (late Oligocene to middle Miocene). In the geological setting of the Plavica deposit participate mainly volcanic and

volcano-sedimentary rocks, which exact determination is complex due to intensive presence of hydrothermal alterations. However, with numerous lithostratigraphic and petrographic studies it was confirmed that in the geological setting of this deposit participate ignimbrite, stratified volcanic tuff and breccia, dacite-andesite and their pyroclasts as well as quartzlatites mostly occurring as breakthroughs. Definition of these rocks is hard because of intensive hydrothermal alterations such as: kaolinization, silification, alunization, sericitization and other (Serafimovski, 1993; Serafimovski et al., 2014). The central part of Plavica is made of different kind of volcanic rocks, hydrothermally altered, pyritized, and mineralized with ore mineralization (Cu, Au, Ag, Pb, Zn). According to the research made on Plavica mainly based on boreholes data, the depth of the ore mineralization and intensive hydrothermal alteration exceeds 1000 m.

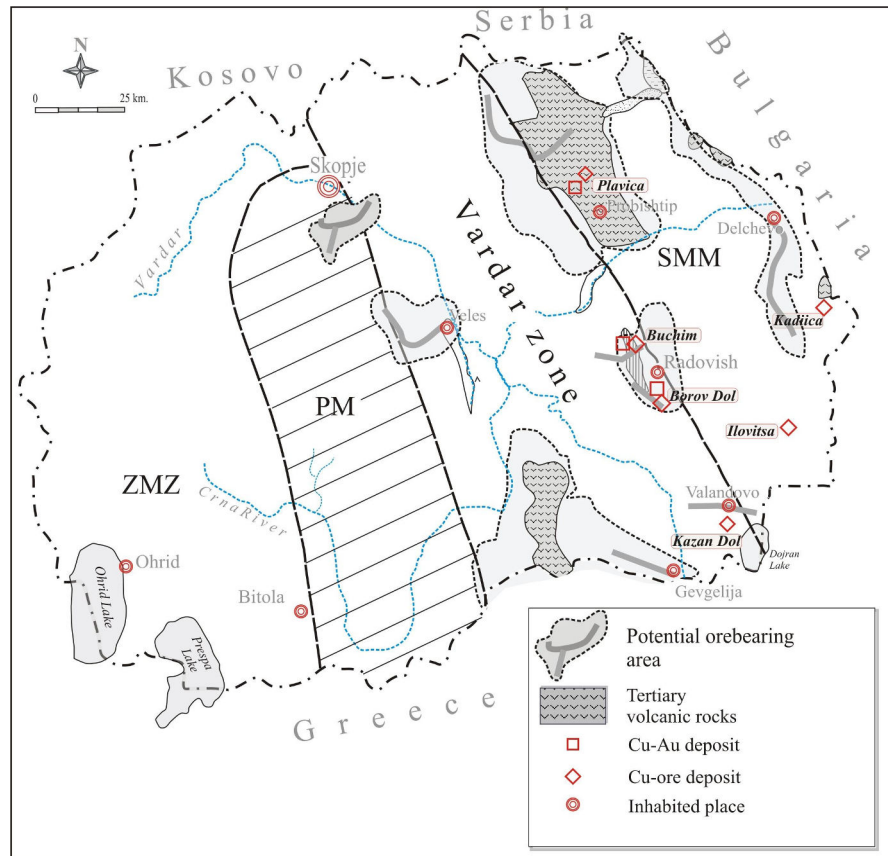


Fig. 1. Geographic position of the analyzed deposits

The silica ledges seen on Plavica represent the level of paleo-regional ground water table. Due to their silica content both areas have resisted erosion and formed prominent landforms through topographic inversion. Tertiary rocks are the dominant lithology at the Plavica area. Review of these numerous different types of rocks will be presented according to their geochronological order defined on the basis of found fauna superpositional relations and absolute age of certain types of volcanic rocks (Serafimovski et al., 2014)

The geological setting of the immediate surroundings of the Bučim deposit includes the following end members: Precambrian metamorphic complex, Paleozoic magmatic rocks and Tertiary volcanic rocks.

In the Precambrian metamorphic complex gneisses are the most widespread rocks in both, broader and immediate areas around the deposit. According to the mineral composition, several intercalating facies can be distinguished: biotite gneisses, amphibole-biotite gneisses, muscovite gneisses, two-mica gneisses, and metasomatic

(leucocratic) gneisses. Micaschists represent a normal lithological member of the crystalline schist in which they occur as an interstratified facies. Consequently, they are of the same metamorphic age. From the aspect of mineralization, they are unfavorable environment, compared to gneisses, being poorly permeable for hydrothermal solutions. Amphibolites occur in the crystalline schist in the form of lenses or strata and larger irregular masses. Generally, they are concordant to the crystalline schist and at places depart from their foliation. They are featured by dark green color and schistose structure (Serafimovski et al., 2016).

The Paleozoic magmatic rocks occur in the form of small lenses distributed along clearly pronounced ruptures. So far, the following ones have been recognized (Čulev, 1970): Amphibolites, fine-grained rocks of thin banded texture, which represent unfavorable environment for deposition of the Cu mineralization. They are composed of hornblende, plagioclase and partly, foliated biotite and chlorite aggregates (Ivanov, 1982; Čifliganec et al., 1993). Serpentinities occur north of the

Vršnik ore body. They have significant sizes and thickness (about 10 m), being distributed along the rupture zone.

The Tertiary volcanic rocks played an important role in the geological setting of the Bučim deposit (Majer, 1958; Karamata, 1983; Čifliganec, 1987, 1993; Denkovski et al., 1983; Denkovski and Bandilov, 1985; Serafimovski, 1990, 1993; Stojanov and Serafimovski, 1990; Stojanov and Boev, 1993; Boev and Yanev, 2001). They occur as minor intrusives within the Precambrian metamorphic complex. During the Neogene, tectonic and magmatic processes resulted in widespread magmatism. At the present erosion level it is represented by sub-volcanic and volcanic facies of latite and andesite in the form of dykes and necks. In the intrusive level the rocks correspond in composition from quartz-diorite to granodiorite. In terms of chemism, they belong to calc-alkaline and alkaline affinity. At later stages, they were enriched in potassium.

The ore deposition is genetically connected with the emplacement of Tertiary, Oligocene-Miocene subvolcanic latitic and latite-andesitic bodies within Precambrian metamorphic rocks – gneisses, micaschists and amphibolites (27.5–24.5 Ma, Serafimovski, 1993, or 24.5–24.0 Ma, Lehmann et al., 2013).

The Borov Dol deposit is related to the Tertiary volcanic-plutonic complex (27–37 Ma; Serafimovski, 1993). The ore-bearing volcanic rocks are metasomatically altered. The volcanic rocks belong to the high-K shoshonitic series and correspond to monzodiorite and monzonite in K_2O-SiO_2 discrimination. These are andesite, latite, trachyte and rhyolite, including transitional varieties (Serafimovski et al., 2010; Lehmann et al., 2013). It is worth mentioning that the rocks of shoshonitic series are typical for districts with porphyry Cu mineralization at continental margins, e.g. Bajo Alumbraera, Gunumba, Bingham, Ok-Tedi, Grasberg, Cadia, etc. (Müller & Groves, 2000; Blevin, 2002).

The wider area of Kazan Dol is built mainly of metamorphic rocks of Precambrian (finegrained biotite gneiss, muscovite-biotite gneiss and muscovite gneiss) and Lower Paleozoic age (sandstones and marble breccia), as well as Mesozoic products represented by so-called Furka granites, quartz and/or quartzless porphyries, serpentinites, diabase, gabbro etc. Cenozoic is represented by Tertiary and Quaternary products. The geological setting in the closest vicinity of the Kazan Dol deposit is built of Precambrian metamorphic rocks, yellow

and compact porphyroblastic gneiss in westernmost parts of the terrain as well as two-mica cordierite gneiss present along the Jurt-Deresi, Armut-Tepesi, Kazan Dol village and Bogdanci direction. Paleozoic products are represented by grey-greenish sericitechlorite schist in southernmost parts of the area. Mesozoic has been represented by Furka granites (central and south-eastern parts of the area), quartz and quartzless porphyries (along tectonic lines of NNW-SSE direction), quartz keratophyre and keratophyre.

These granites have determined absolute age of 155 ± 5 Ma by Rb/Sr method (Šoptrajanova, 1967) and 156 ± 6 Ma (Borsi et al., 1966). Interesting mineralizations of Cu, Fe, Zn of skarn type and especially Cu-vein type of the Kazan Dol type were related to these Jurassic granitoids (Ivanov, 1966; Ligoški, 2015).

From the geological and structural aspects, the Bukovik-Kadiica area belongs to the well-known Serbo-Macedonian mass. It is composed mainly of Riphean-Cambrian and Paleozoic metamorphic rocks represented by metadiabases and schists (diabase-phyllitoid complex, Vlasina complex) and diorites (Tasev, 2010). The Paleozoic rocks have experienced green schist facies metamorphism and display a well-developed schistosity. Near Berovo they directly cover gneisses of the amphibolite facies (Karamata, 1974; Kockel et al., 1975, Grubić, 1980; Dumurdžanov et al., 2005). The mineralizations are related to the Oligo-Miocene to Lower Pliocene, 25 to 14 Ma (Harkovska et al., 1989; Stojanov et al., 1995; Boev et al., 1997; Boev and Yanev, 2001) calc-alkaline complexes (rhyolite-quartzlatite-dacite/andesite), which occur in intervals along the fractured zones. The Tertiary volcanism in the Bukovik-Kadiica area is represented by the volcanic dome Bukovik (1722 m) and small subvolcanic bodies of dacites and rhyodacites at Belo Brdo and Kadiica (1932 m) at a surface of about 4 km². Small dacite bodies and dykes have been found also on Bulgarian territory within a zone of NW–SE direction as well as an extrusive dome with subvolcanic breccias at the intersection of faults with north-south and NE-SW strike (Harkovska, 1984). The Kadiica subvolcanic intrusive center is one of several Neogene dacitic plugs that have intruded a variety of metamorphic rocks of the Serbo-Macedonian massif (Tasev, 2010; Serafimovski et al., 2014 – Elaborate). Several of these intrusives are associated with quartz vein stockwork development and wide-spread hydrothermal alteration. The subvolcanic intrusive complex is poorly exposed on the Bukovik hill

(1722 m a.s.l.) and consists of flow banded dacite and massive fine crystalline aphyric dacite that have been intruded by a coarser equigranular dacite phase, a quartz-, biotite- and plagioclase-phyric dacite porphyry and a postulated second dacite porphyry at depth. Near-surface pyroclastics and dacitic autobreccias are exposed along the southwest side of the Bukovik hill.

Interesting mineralizations of Cu Fe, Zn of scarn type and especially Cu-vein type of the Kazan Dol type were related to these Jurassic granitoids. It is located on the territory of Republic of Macedonia, more precisely in its southeastern part, at about 17 km distance from Strumica city, in the immediate vicinity of the Ilovitza village.

Mineralogical-petrographic characteristics of the Ogražden massif indicate that it is quite heterogeneous and is basically represented by calcalkaline granites. These granites shall occupy the central parts of the mountain Ogražden, represented by: biotite coarse-grained granites, leucocrate coarse-grained granites, granitoporphyrines, muscovite leucocrate granites, two mica medium-grained granites, biotite porphyry granites and granodiorite, leucocrate schist granites.

From mineralogical aspect, the Ogražden massif is represented by large crystals of feldspar,

a large amount of biotite and quartz. From petrographic aspect, the same are characterized by alotriomorphic grain to porphyry texture with massive, and sometimes weaker schists structure.

Hydrothermal changes in the dacite-andesite caused almost completely destroyed primary structure and changes in the mineral composition. These changes are manifested in the form of silicification, sericitization, alunitization, kaolinitization and at some places opalitzation and chloritization (Rogožareva, 2013). The zone of intensive silicification and sericitization space is expressed on the west side of the dacite-andesite disruption.

The zone of intensive silicification and alunitization space is expressed on the eastern part of the dacite-andesite disruption, in which the presence of alunite varies from 20 to 50%.

It is noticed that in the parts where alunite is present within the limits of 20–48%, sulphide mineralization is missing, similarly as in Plavica polymetallic systems (Stojanov, 1980) and Dudica (Ivanov and Ivanova, 1980). However, in the parts where intensive silicification and alunitization are registered as well as certain contents of gold (over 19 g/t), which mark one epithermal area, the mineral components are products of acidly sulfate solutions (Serafimovski and Aleksandrov, 1995).

MATERIALS AND METHODS

During the period between 2008 and 2016 within detailed geological investigations of the above described metallic mineral deposits, certain scope of geotechnical investigations and tests were performed. In most of the cases, separate programs for geotechnical investigations were prepared, which were later realized as planned. As part of these investigations, numerous other field work and tests were done in relation to define as more precisely as possible the engineering-geological, geophysical and hydrogeological properties of the deposits. These will be presented elsewhere and herein is only analyzed the geotechnical data obtained from laboratory tests. In particular, this paper deals with analysis of the following geotechnical parameters of rock samples taken from different zones of the mentioned deposits:

- Point load strength tests (J_{s50}) (PLT);
- Uniaxial compressive strength tests (UCS);
- Unit and specific weight measurements (UW and SW);
- Porosity (P);

- Shear strength along joints (SS).

It should be noted that all tests (over 800) have been performed according to the suggested methods of the International Society for Rock Mechanics and in the certified laboratory of the Chair for Geotechnics at the Faculty of Civil Engineering in Skopje, Republic of Macedonia. The whole process of testing is accordingly documented by taking photographs of tested samples (Figure 2), notation of failure modes, notation of samples showing unusual behavior (swelling, decomposing during preparation, etc.).

Point load strength tests were performed mostly on irregular rock lumps from the superficial layer of on rock core from investigation boreholes.

Uniaxial compressive strength tests were done on regular samples with height/diameter ratio $H/D \geq 2$, and for shorter samples appropriate corrections of the obtained values were made. The load speed, usually 0.25 MPa/s, was controlled automatically by computer unit (Figure 2).

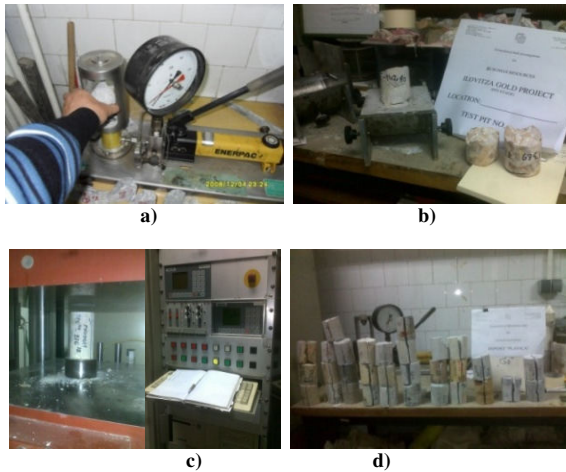


Fig. 2. Photographs from laboratory tests: **a)** point load strength, **b)** shear strength along joints (samples in phase of preparation), **c)** uniaxial compression test (UCS) and control unit, **d)** look of samples after UCS test

The samples tested for definition of unit weight, specific weight and porosity were selected in order to cover as many zones as possible for each of the treated deposits, and to obtain more accurate information on the variation of these parameters.

Test for shear strength along joints were performed on natural joints, in some cases also with known dip elements and by known procedures for

selection of vertical loads. Here we only discussed the friction angle and joint roughness.

It should be taken into consideration that the number of tested samples for particular property is not equal for each deposit, and for certain deposits some types of tests were not performed at all or the number of tests was rather small. This is result of the different geotechnical investigations programs which were developed for each separate deposit. As other limitations of this analysis can be considered: lack of samples from larger depth from some of the deposits; lack of samples from some of the particular "alteration" zones designated in respective deposits; discrepancy in relation to depth of taken samples for establishment of more precise correlation among parameters (for example, different depths of samples for unit weight and specific weight, different depth of samples tested on point load and uniaxial strength or similar); lack of UCS strain gauges tests to define the stress-deformation properties of the rock monoliths.

With future investigation stages at these deposits, and during exploitation period these shortcomings should be surpassed and more precise geotechnical profile of the deposits will be obtained. Therefore, in this paper, the geotechnical data collected to present date is discussed, and as new data is obtained in future, the shown correlations will be updated.

RESULTS AND DISCUSSION

In the following sub-chapters, diagrams and charts the statistical analysis of values of each particular geotechnical parameter is presented. De-

tailed data on statistical distribution of the results are shown in Tables 1 and 2.

Table 1

Statistical distribution of point load strength, uniaxial compressive strength and shear strength along joints for all deposits

Parameter												Deposit
Shear strength along joints				Uniaxial compressive strength (MPa)				Point load strength $J_{s(50)}$ (MPa)				
SD	Max	Min	Av.	SD	Max	Min	Av.	SD	Max	Min	Av.	
6.55	51.27	17.00	32.08	30.55	139.50	2.00	34.96	1.65	7.60	0.32	2.68	Ilovica
				21.87	74.30	10.60	36.06	0.85	3.84	0.78	1.92	Kadiica
				18.18	113.71	2.33	26.69	1.80	9.54	0.54	2.85	Plavica
2.98	36.00	26.00	30.71	46.13	186.57	5.99	63.38	1.90	9.96	4.14	6.11	Bučim
				18.21	52.32	6.37	32.41	1.85	8.82	0.43	3.53	Kazan dol
6.57	37.00	14.00	29.75	29.66	101.21	5.45	47.84	2.88	12.63	0.54	4.41	Borov dol
6.34	51.27	14.00	31.63	30.57	186.57	2.00	36.60	2.04	12.63	0.32	3.12	All samples

Table 2

Statistical distribution of unit weight, specific weight and porosity for all deposits

SD	Porosity (%)			Parameter				Unit weight (kN/m ³)				Deposit
	Max	Min	Av.	Specific weight (kN/m ³)				Unit weight (kN/m ³)				
				SD	Max	Min	Av.	SD	Max	Min	Av.	
6.10	27.12	0.22	6.96	1.02	30.35	26.02	27.52	2.07	27.19	17.22	23.95	Ilovica
								1.18	27.96	23.27	25.91	Kadiica
6.68	31.37	3.21	16.21	1.07	32.25	26.57	28.62	2.02	28.72	18.02	23.67	Plavica
								0.58	27.79	24.45	26.14	Bučim
2.56	8.57	0.93	5.10	0.65	28.83	26.00	27.55	0.63	27.84	24.58	26.12	Kazan dol
5.81	20.95	0.66	7.83	0.74	29.44	27.01	28.31	1.43	29.28	20.69	25.32	Borov dol
7.40	31.37	0.22	9.74	1.08	32.25	26.00	28.03	2.02	29.28	17.22	24.50	All samples

Point load strength tests

The point load strength results show that most of the tested samples belong to the medium range of strength. More precisely, according to the most usual strength classifications presented by Jovanovski et al. (2012), tested samples represent mostly strong, average (weak) and very strong rock classifications. (Figure 3).

In relation to the vertical distribution, it was found that for all deposits, PLT values vary to some extent. For example: for the deposits Plavica and Ilovica, Borov Dol and Kazan Dol values are usually in range from 2.0 to 8.0 MPa; for the deposit Bučim (in particular ore body Čukar) the values are in range from 4.0 to 8.0 MPa.

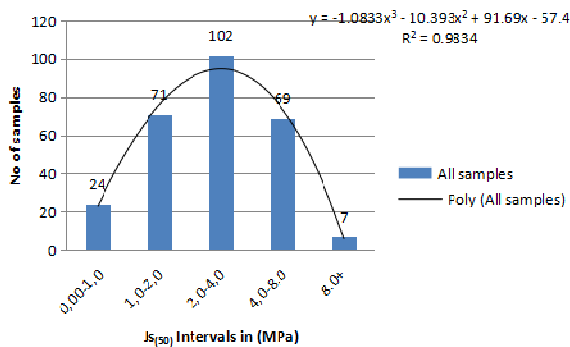


Fig. 3. Number of point load strength Js50 samples divided in five strength classes

For the deposit Kadiica, the values are usually in range from 1.0 to 4.0 MPa. If all data is taken into account, then certain trend toward lowering of the values to a range of 1.0 to 4.0 MPa as the depth increases can be noticed (Figure 4). However,

there is small number of samples from larger depth for some of the deposits so in future this statement needs to be confirmed.

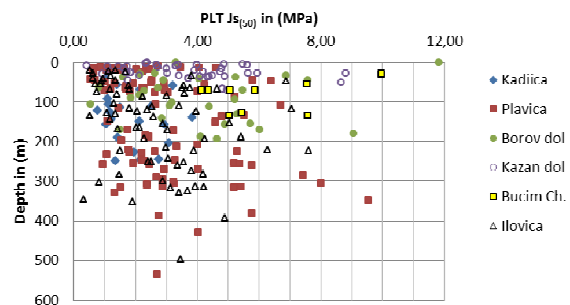


Fig. 4. Variation of point load strength Js50 with depth for all deposits

Uniaxial compressive strength tests (UCS)

In contrast to the point load strength results, the results from uniaxial compressive strength imply that most of the rocks belong to category of medium strong, then strong and very strong rock classifications according to ISRM (Figure 5).

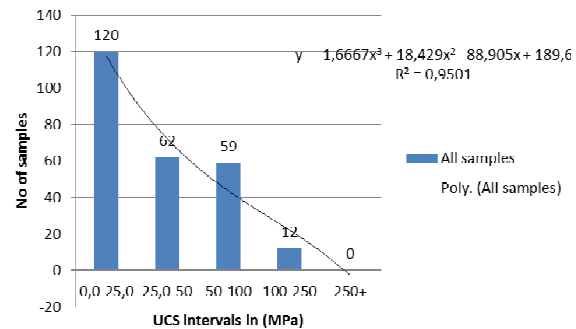


Fig. 5. Number of uniaxial compressive strength samples divided in five strength classes

In relation to values distribution in vertical direction, certain patterns are visible for particular deposits (Figure 6). If all data is considered, then there is trend to decreasing of the strength as the depth increases with the most frequent values of the strength in the range of 5.0–50.0 MPa. The samples from Bučim deposit have the highest strength, while the lowest strength values are noticed for deposit of Ilovica. Uniaxial compressive strength of samples from the Ilovica and Plavica deposits varies in wide range, however with noticeable decrease of strength as depth increases. Strength of samples from the deposits of Kadiica and Borov Dol show narrower range, but in this case the number of samples is very low. It is clearly noticeable that the highest values of the uniaxial strength are registered for samples taken from depths in the interval of 0.0–200.0 m.

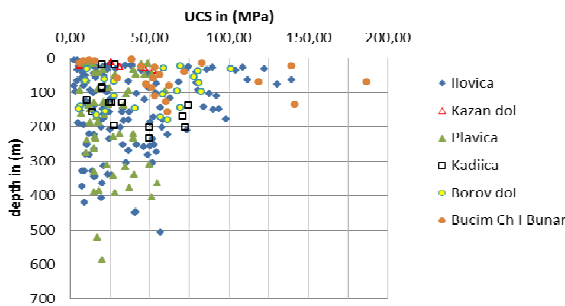


Fig. 6. Variation of uniaxial compressive strength with depth for all deposits

In the values of uniaxial compressive strength from all analyzed deposits are compared with the typical values of bare (without ore) igneous rocks, then it is clear that the alteration processes have lowered the strength of the rock to a very high extent. Just for example, average values for most igneous rocks in non-metallic deposits is over the value of 80.0 MPa, usually over 150.0 MPa, while in this case most of the deposits have average values in range of 35.0–60.0MPa. In the case of deposit Bučim, the highest average (63.38 MPa) and highest achieved uniaxial strength (186.57 MPa) as a result of the intense silicification of the rock mass were registered. On the other hand, in the deposit of Plavica average of 26.69 MPa was found, as well as the lowest achieved strength of 2.33 MPa which is clear result of the alterations.

If the values of uniaxial compressive strength are correlated with the point load strength results (Figure 7), then it is clear that the usual coefficient (22) in the well-known equation $UCS(\sigma_p) = J_{s50} \cdot 22$ is not applicable for general use when it

comes to rock strength estimation for these metallic mineral deposits. In this relation more specific test programs should be performed in future.

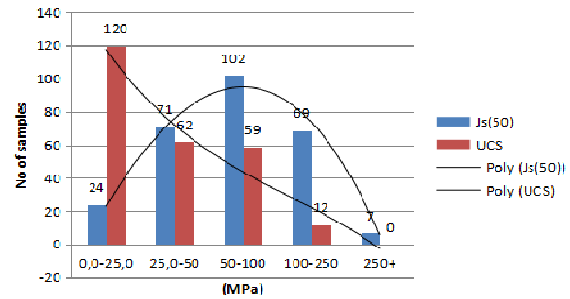


Fig. 7. Correlation of results from UCS and $J_{s(50)}$ tests

Shear strength along joints

The analysis of shear strength along joints is performed for very small number of samples in relation to other tests (Figures 8, 9, 10 and 11). The most frequent value of the obtained friction angle is in the range of 30–35° and the most usual value of the joint roughness coefficient is $JRC = 4-10$. In particular, for Ilovica deposit it can be noticed that the friction angle increases with depth, and that JRC tend to conform to a narrower range in relation to the ranges of shallower samples (Figure 11).

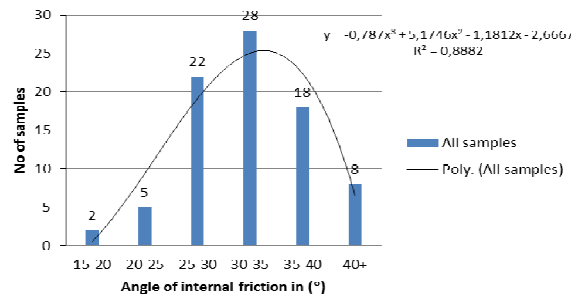


Fig. 8. Number of samples tested for shear strength along joints divided in six classes (angle of internal friction)

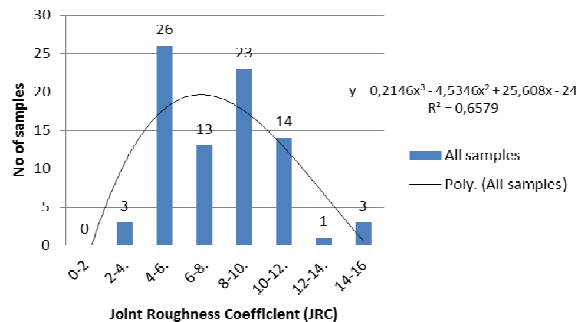


Fig. 9. Number of samples tested for shear strength along joints divided in six classes (joint roughness coefficient)

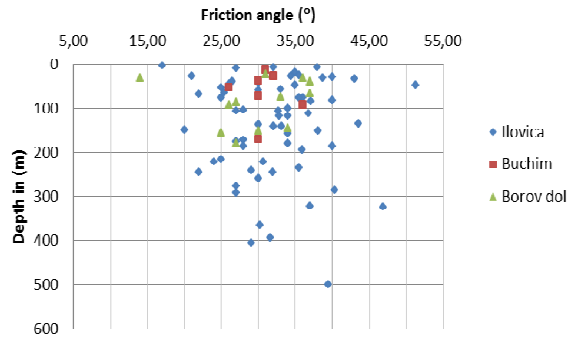


Fig. 10. Variation of friction angle along joints for all deposits

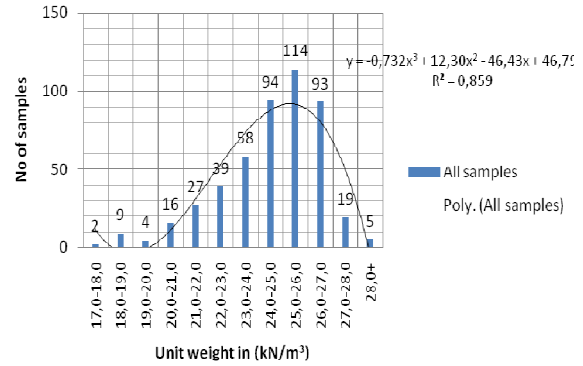


Fig. 12. Number of unit weight samples divided in 7 classes

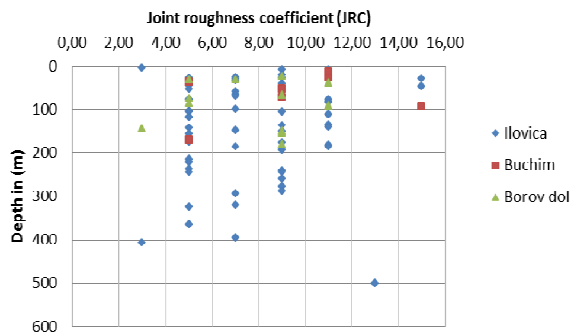


Fig. 11. Variation of joint roughness coefficient for all deposits

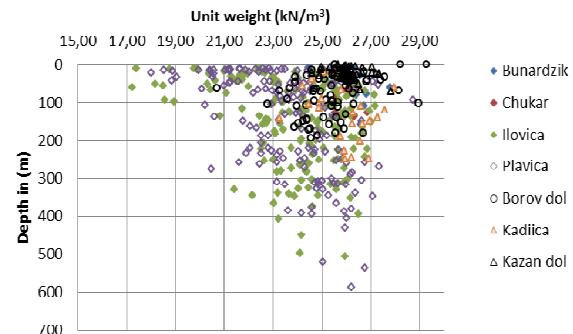


Fig. 13. Variation of unit weight with depth for all deposits

Since the shear strength along joints is of particular interest in the mining design of the working benches slope angles, as well as for the final pit shell slopes in open pit mines, it is very important to perform additional investigations for some of the deposits. Therefore, the results presented herein can be used to extrapolate some of the shear strength parameters only for certain zones of the Ilovica deposit, while for the other deposits it can be considered that there are not enough samples to perform any extrapolations in this sense.

Unit weight

If the results from all deposits are analyzed it is noticed that the unit weight of the rocks is in the interval between 17.0 and 29.0 kN/m³ (Figure 12). Such large variations in the values are characteristic mostly for samples to the depth of 100.0 to 150.0 m (Figure 13). Samples from depth over 150.0 m show reduction of this variation, with tendency towards values between 24 and 27.0 kN/m³. The largest variations are noticed for the deposits of Ilovica and Plavica, while the lowest for Bučim and Kazan Dol (Figure 13 and Table 2).

Specific weight

Specific weight tests were performed only on samples from three of the deposits. The obtained values are usually in the range of 27.0–29.0 kN/m³ and with slightly but noticeable tendency towards larger values as the depth increases (Figures.14 and 15). However, because only three of the deposits are analyzed, no general conclusions are achieved.

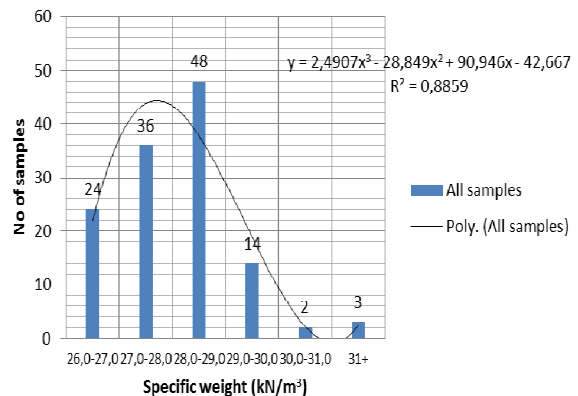


Fig. 14. Number of specific weight samples divided in six weight classes

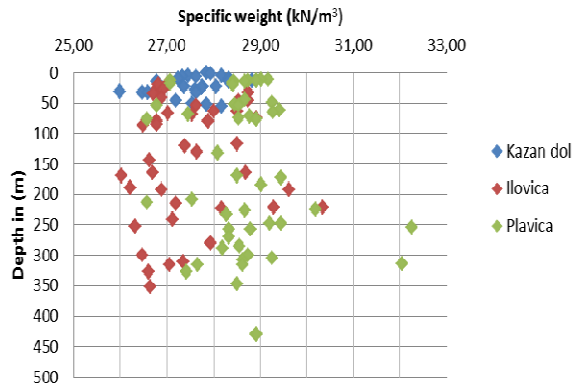


Fig. 15. Variation of specific weight with depth for deposits of Kazan Dol, Ilovica and Plavica

Porosity

The porosity ranges for all rocks from four of the deposits are presented in Figure 16. Most of the values classify the rock in group of low to medium porosity ($n = 1-15\%$), while the rest can be classified as rock with high porosity (15–30%).

If these values are compared with porosity of bare igneous rocks (without ore) then the difference is significant. Standard values of igneous rocks porosity with some rare exceptions are in range of up to 2%). In relation to changes in vertical direction, it is clear that the porosity decreases with depth in all of the analyzed deposits (Figure 17).

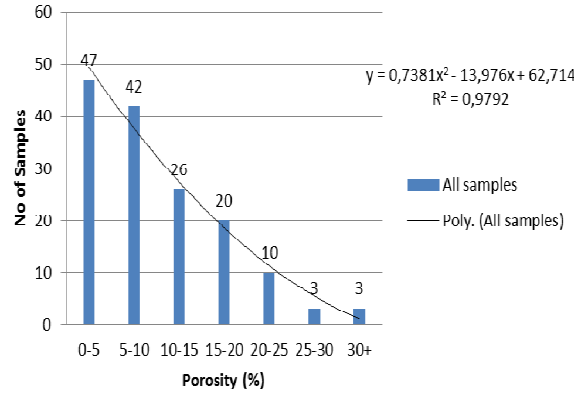


Fig 16. Number of samples tested for porosity divided in seven porosity classes

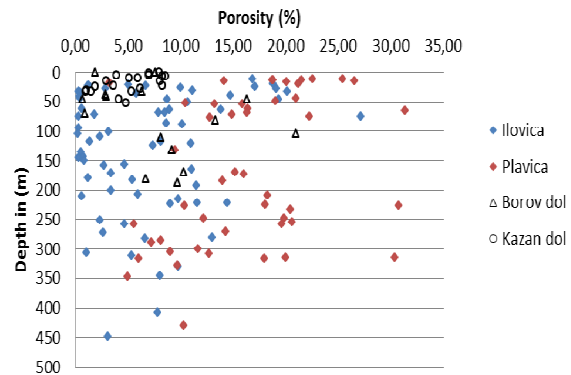


Fig. 17. Variation of porosity with depth for deposits of Kazan Dol, Ilovica, Plavica and Borov Dol

CONCLUSIONS

Metallic mineral deposits in the Republic of Macedonia have very variable values of the basic geotechnical properties. The most pronounced variability is related to the strength parameter or in particular the unconfined uniaxial strength of the rocks. In relation to the changes in vertical profile of the deposits, particular patterns are noticed almost for all properties and these relations are more or less pronounced from deposit to deposit. From the noticed trends in the vertical profiles of all deposits, it can be concluded that most geotechnical parameters tend to some stabilization-equalization as the depth increases.

However, one should be very cautious during performing certain extrapolations in the uninvestigated zones of the deposits, especially with taking into account the mentioned shortcomings and limitations of the analyses presented

herein. It is suggested that further investigations and statistical analyses are performed in order to get more precise picture of the geotechnical values variations both in vertical and horizontal direction for each of the deposits.

In this context, possible investigations should be aimed at:

- establishing correlations between geotechnical parameters with certain rock types / hydrothermal alterations;
- establishing correlations between geotechnical parameters with distance from the center of the hydrothermal/porphyry system in horizontal and vertical direction;
- divide each deposit in particular geotechnical domains using geotechnical modeling softwares.

Acknowledgement: The analyses and results presented in this paper were made possible by the support of the following entities: University “Ss. Cyril and Methodius” in Skopje, Faculty of Civil Engineering – Skopje, Department of Geotechnics; University “Goce Delčev” in Štip, Faculty of

Natural and Technical Sciences, Department of Mineral Deposits; Euromax Resources, Genesis Resources Macedonia, Sardich MC (part of the Copin Group), DPTU Bučim DOO Radoviš, DPTU Borov Dol DOOEL Radoviš, DPTU Kadiica DOOEL Skopje.

REFERENCES

- Adamczyk, J. (2012): Basic geotechnical properties of mining and processing waste – A state of the art analysis. *AGH Journal of Mining and Geoenvironment*, Vol. 36, No. 2. Pp. 31–41.
- Augusto, F. (2004): Mass movements identification, modeling, analysis and mapping: some experiences in the southern of Brazil, São Paulo State. In: *Proceedings of the 9th International Symposium on Landslides, June 28 to July 2 2004. Rio de Janeiro*, 1. Balkema, Rotterdam, 57–67.
- Bieniawski, Z. T. (1974): Estimating the strength of rock materials. *Journal of the South African Institute of Mining and Metallurgy*, 74, pp 312–320.
- Blevin, P. (2002): The Petrographic and compositional character of variably K-enriched magmatic suites associated with ordoevian porphyry Cu-Au mineralisation in the Lachlan Fold Belt, Australia. *Min. Dep.* 37, 87–99.
- Blight, G. E., Troncoso, J. H. and Fourie, A. B. (2000): Issues in the geotechnics of mining wastes and tailings. In: *Geo Eng. 2000, Int. Conf. on Geotechnical and Geological Engineering*, Melbourne, Australia, Vol. 1, pp. 1253–1285.
- Boakye K. (2008): *Large in situ direct shear tests on rock piles at the Questa Mine, Taos County, New Mexico*. MSc thesis. New Mexico Institute of Mining and Technology, Socorro.
- Boev, B. and Yanev, Y. (2001): Tertiary magmatism within the Republic of Macedonia: A Review. *Acta Vulcan.* 13, 1–2, 57–71.
- Brady, B. H. G. and Brown, E. T. (2006): *Rock Mechanics for Underground Mining*, 3rd Edition, Chapman and Hall, London.
- Čifliganec, V. (1987): *Metallogenetic features of the Bučim copper deposit in the Serbo-Macedonian metallogenetic province*. Ph.D. thesis, Faculty of Mining and Geology, Belgrade, Serbia, 190 p. (in Serbian)
- Čifliganec, V. (1993): *Copper Mineralization in the Republic of Macedonia: Types and Distribution Patterns*. University “Ss. Cyril and Methodius” Skopje, Faculty of Mining and Geology, Štip, Spec. Issue 1, 303 p. (in Macedonian).
- Čulev, G. (1970): Detalni geohemiski istraživanja na bakar vo 1969 [Detailed geochemical exploration of copper in 1969]. Special Fund of the Geological Survey of the Republic of Macedonia, Skopje, 78 p. (in Macedonian).
- Denkovski, Gj., Ivanov, T. and Dumurdžanov, N., (1983): Report for the complex geological exploration of the Bučim-Damjan-Borov Dol ore area in 1982. Professional Fund of the Geological Survey of the Republic of Macedonia, Skopje, 87 p. (in Macedonian).
- Denkovski, N. and Bandilov, L. (1985): Report for the complex geological exploration of the Bučim-Damjan-Borov Dol ore area, Čukarka locality. Professional Fund of the Geoinstitute, Republic of Macedonia, Skopje, 62 p. (in Macedonian).
- Department of Industry and Resources (1997): *Geotechnical Considerations in Underground Mines Guideline*. Perth.
- Department of Minerals and Energy (1999): *Geotechnical Considerations in Open Pit Mines Guideline*. Perth.
- Durmurdžanov, N., Serafimovski, T., Burchfiel, B. C. (2005): Cenozoic tectonics of Macedonia and its relation to the South Balkan extensional regime. *Geosphere* 1, 1, pp 1–22.
- Grubić, A. (1980): Yugoslavia: Outline of Yugoslavian geology. *26th International Geological Congress*, Paris, 615, pp. 5–49.
- Harkovska, A. (1984): Tertiary magmotectonic zones in southwest Bulgaria. In: Vozar J., editor. *Magmatism of the Molasse forming Epoch and Its Relation to Endogenous Mineralization*: Bratislava, Geologický ústav Dioýza Štúra, pp. 9–34.
- Ivanov, T. (1966): Metallogeny of the Vardar zone. *Proceedings of the 6th Counseling*. Part II: *Geochemistry and Ore Deposits*, pp. 424–448 (in Macedonian).
- Ivanov, T. (1982) Metalogenetski proučivanja na oblata Bučim-Damjan-Borov Dol [Metallogenic study of the Bučim-Damjan-Borov Dol ore area]. Bučim Mine Professional Geological Survey Fund, Radoviš, Macedonia, 76 p. (in Macedonian).
- Ivanov, T. and Ivanova, V. (1980): Hydrothermal alteration of effusive rocks from the Dudica-Kožuv, Macedonia. *Symposia Alteration of Rocks and Minerals, 100 Years of Geological School and Science in Serbia*, Beograd, pp. 113–121. (In Serbian).
- Јовановски, М., Гапковски, Н. Пешевски, И. Аболмасов, Б. (2012): *Инженерска геологија*, Универзитетски учебник, Градежен факултет, Скопје.
- Karamata, S. (1974): *Geohemijske, petrološke i metalogenetske provincije kredno-tercijarne starosti u delovima Balkanskog poluostrva i Male Azije* [Geochemical, petrological and metallogenetic provinces of Cretaceous–Tertiary age at parts of the Balkan Peninsula and Middle East]. SANU, Special Edition, vol. CDLXXV, Belgrade, Serbia, 55 p. (in Serbian).
- Karamata, S. (1983): Concentration of some microelements in Tertiary magmatites of eastern part of Yugoslavia related

- to their geotectonic position. Glas SANU CCCXXXV, Belgrade. Department of Natural and Mathematical sciences. 49, 39–54 [in Serbian].
- Karamata, S., Stojanov, R., Serafimovski, T., Boev, B., and Aleksandrov, M. (1992): Tertiary magmatism in the Dinarides, Vardar zone and Serbian-Macedonian mass, *Geologica Macedonica*, **6**, 2, pp. 127–186.
- Kockel, F., Mollat, H., Gundlach, H. (1975): Hydrothermally altered and (copper) mineralized porphyritic intrusions in the Serbo-Macedonian massif (Greece). *Mineralium Deposita*, **10**, pp 195–204.
- Lehmann, S. T., Barcikowski, J., Von Quadt, A., Gallhofer, D., Peytcheva, I., Heinrich, C. A. and Serafimovski, T. (2013): *Geochronology, geochemistry and isotope tracing of the Oligocene magmatism of the Bučim–Damjan–Borov Dol ore district: Implications for timing, duration and source of the magmatism*. Lithos. Elsevier, 180/181, 216–233.
- Ligovski, M. (2015): *GIS data model of Kazandol copper mineralization exploration results*. Masters thesis, “Goce Delčev” University, Štip, 88 p. (In Macedonian).
- Majer, V. (1958): Trachy-andesite (Delenite latite) from Pilav and Sopur in Macedonia. Yearbook of the Faculty of Philosophy, Skopje, 2/7, 23–32 (in Croatian).
- McG. Robertson, A. and Caldwell, J. (n.d.) (2017): Geotechnical engineering. Available from: <http://technology.infomine.com/reviews/geotechnical/welcome.asp?view=full#roads> [Accessed 24th January 2017]
- McLemore, V. T., Fakhimi A., Van Zyl D., Ayakwah G. F., Anim K., Boakye. K., Ennin F., Felli P., Fredlund D., Gutierrez L. A. F., Nunoo S., Tachie-Menson S. and Viterbo V. C. (2009): *Questa Rock Pile Weathering Stability Project: Literature review of other rock piles: characterization, weathering, and stability*. New Mexico Bureau of Geology and Mineral Resources. Report number: OF-517.
- Müller, D. and Groves, D. I. (2000): *Potassic Igneous Rocks and Associated Gold-Copper Mineralization*. Springer-Verlag, Berlin-Heidelberg, 272 p.
- Pariseau, William G. (2007): *Design Analysis in Rock Mechanics*. Taylor & Francis,
- Rogožareva, D. (2013). *Deposit Ilovitza: geological, mineralogical and genetic characteristics*. Faculty of Natural and Technical Sciences, University “Goce Delčev”, Štip, 150 p.
- Serafimovski, T. (1990): *Metallogeny of the Lece-Chalkidiki Zone*. Doctoral thesis, Faculty of Mining and Geology, Štip, 380 p. (in Macedonian).
- Serafimovski, T. (1993) Structural-metallogenic features of the Lece-Chalkidiki zone: Types of deposits and reionization. Štip, Faculty of Mining and Geology, Spec. Issue No. 2, 235 p. (in Macedonian).
- Serafimovski, T. and Aleksandrov, M. (1995). *Lead-zinc deposits and occurrences in the Republic of Macedonia*. Faculty of Mining and Geology, Štip, Special Issue 4: pp. 387 (in Macedonian).
- Serafimovski, T., Aleksandrov, M., Tasev, G., Stefanova, V., Paterson, J., Stevanović, M., Ristovski, V. and Ivanovski, I. (2014): Elaborate of detailed geological study, with calculation of geological ore reserves of copper and gold in the Plavica, Kratovo locality. Department of Mineral Deposits at the Faculty of Natural and Technica Sciences, University “Goce Delčev”, 431 p. (in Macedonian).
- Serafimovski, T., Stefanova, V. and Volkov, A. V. (2010): Dwarf copper–gold porphyry deposits of the Bučim–Damjan–Borov Dol ore district, Republic of Macedonia (FYROM). *Geol. Ore Dep.* **52**, 179–195.
- Serafimovski, T., Tasev, G., Srmić-Palinkaš, S., Palinkaš, L. and Gjorgjiev, L. (2016): Porphyry Cu mineralization related to the small Tertiary volcanic intrusions in the Bučim ore deposit, eastern Macedonia. *Geologica Croatica*, **69** (1). pp. 103–121.
- Smith, M. R. & Colhs, L. (eds.) (2001): *Aggregates: Sand, Gravel and Crushed Rock Aggregates for Construction Purposes*. Geological Society, London, Engineering Geology Special Publications, 17.
- Stojanov (1980), Volcanic cupola Plavica and polymetallic mineralizations and alterations within. *Symposia of Alteration of Rocks and Minerals. A 100 Years of Geological School and Science in Serbia*, Faculty of Mining and Geology, University in Belgrade, 1980, pp. 139–162.
- Stojanov, R. and Boev, B. (1993): Oligocene-Neogene magmatism at the Bučim Blok area. In: *Study for potentiality of the Bučim ore field in regards to discovery of new copper and gold reserves*. Professional Fund of the Bučim Mine Geological Survey, PRMB Bučim-Radoviš, 93 p. (in Macedonian).
- Stojanov, R. and Serafimovski, T. (1990): Basic features of the Tertiary magmatism in the Bučim-Borov Dol area. *12th Congr. of Geol. of Yugoslavia, Ohrid*, 2, 404-423. (in Macedonian).
- Šoptrajanova, G. (1967): *Petrological and geochronological characteristics of some granitoids of Macedonia*. PhD thesis, Faculty of Mining and Geology, University of Belgrade, 105 p.
- Tasev, G. (2010): *Metallogeny of the polymetallic ore-bearing system Bukovik-Kadiica*. PhD thesis, University “Goce Delčev”, Faculty of Mining and Geology, Štip, 206 p.
- Yan, C. L., Ding, D. X., Tang Y. Q., Bi, Z. W. (2011): Testing of Strength Parameters and Deformation Parameters of Surrounding Rock and their Distributions, *Advanced Materials Research*, Vols. **261–263**, pp. 1360–1364.

Резиме

ОСНОВНИ ГЕОТЕХНИЧКИ ПАРАМЕТРИ НА НАОГАЛИШТА
НА МЕТАЛИЧНИ МИНЕРАЛНИ СУРОВИНИ ВО РЕПУБЛИКА МАКЕДОНИЈА

Игор Пешевски¹, Елена Ангелова², Тамара Јовановска³, Сеад Абазџи¹,
Јован Папик¹, Виолета Стефанова⁴,

¹Градежен факултет, Скопје, Универзитет „Св. Кирил и Методиј“ во Скопје,
Партизански одред 24, МК-1000, Скопје, Република Македонија

²Геохидроконсалтинг, Багдаска 36А, МК-1000, Скопје, Република Македонија

³Postgraduate student – Institute of Civil Engineering, "Peter the Great" Polytechnical University,
Polytechnicheskaya St. 29, Saint-Petersburg, Russian Federation

⁴Факултет за природни и технички науки, Универзитет „Гоце Делчев“,
Крсте Мисирков 10-А, 2000 Штип, Република Македонија
pesevski@gf.ukim.edu.mk

Клучни зборови: геотехнички параметри; наоѓалишта на метални минерални сировини;
статистичка анализа; вертикална дистрибуција

Во трудот е презентирана анализа на основните геотехнички параметри на карпести примероци од поголем број наоѓалишта на метални минерални сировини во Република Македонија. Имено, прикажани се резултати од опсежни геотехнички истражувања изведени на наоѓалиштата Иловица, Боров Дол, Казан Дол, Плавица, Кадица, Бучим. Изведени се повеќе од 800 различни геотехнички лабораториски опити на примероци од јадра земени од различни зони на овие наоѓалишта. Најчесто изведуваните тестови во рамките на геотехничките програми за истражувања на овие наоѓалишта вклучуваат: индекс на точкеста јакост, едноаксијална јакост на притисок, волуменска и специфична тежина, порозност, јакост на смолкнување надолж пукнатини. Сите податоци се ста-

тистички анализирани и дадени се одредени заклучоци кои се однесуваат на поедините геотехнички параметри. Особено внимание е посветено на вертикалната дистрибуција на вредностите на геотехничките параметри, имајќи ја предвид нивната важност за самиот процес на планирање ископи (особено димензионирање на отворени копови) и преработка на рудата. Дискутирани се разликите помеѓу одредени наоѓалишта и дадени се одредени заклучоци и препораки за идни истражувања. Се напомнува дека ова е прв обид да се анализираат олку голем број геотехнички податоци за наоѓалишта на метални минерални сировини во Република Македонија, но со приближување нови податоци, можно е овде претставените корелации да претрпат промени.

