

JOURNAL OF APPLIED ECONOMICS AND BUSINESS

VOL. 5, ISSUE 4 – DECEMBER, 2017



Education and Novel Technology Research Association

Journal of Applied Economics and Business

VOL. 5, ISSUE 4 – DECEMBER, 2017

The Journal of Applied Economics and Business (JAEB – ISSN: 1857-8721) is an international peer-reviewed, open-access academic journal that publishes original research articles. It provides a forum for knowledge dissemination on broad spectrum of issues related to applied economics and business. The journal pays particular attention on contributions of high-quality and empirically oriented manuscripts supported by various quantitative and qualitative research methodologies. Among theoretical and applicative contributions, it favors those relevant to a broad international audience. Purely descriptive manuscripts, which do not contribute to journal's aims and objectives are not considered suitable.

JAEB provides a space for academics, researchers and professionals to share latest ideas. It fosters exchange of attitudes and approaches towards range of important economic and business topics. Articles published in the journal are clearly relevant to applied economics and business theory and practice and identify both a compelling practical issue and a strong theoretical framework for addressing it.

The journal provides immediate open-access to its content on the principle that makes research freely available to public thus supporting global exchange of knowledge.

JAEB is abstracted and indexed in: DOAJ, EZB, ZDB, Open J-Gate, Google Scholar, JournalITOCs, New Jour and UlrichsWeb.

Publisher

Education and Novel Technology Research Association

Web: www.aebjournal.org

E-mail: editorial@aebjournal.org

support@aebjournal.org

publisher@aebjournal.org

Editor-in-Chief

- **Noga Collins-Kreiner**, Department of Geography and Environmental Studies, Center for Tourism, Pilgrimage & Recreation Research, University of Haifa, *Israel*

Editorial board

- **Alexandr M. Karminsky**, Faculty of Economics, Higher School of Economics, *Russia*
- **Anand Bethapudi**, National Institute of Tourism and Hospitality Management, *India*
- **Bruno S. Sergi**, Department of Economics, Statistics and Geopolitical Analysis of Territories, University of Mesina, *Italy*
- **Dimitar Eftimoski**, Department of Economics, Faculty of Administration and Information Systems Management, St. Kliment Ohridski University, *Macedonia*
- **Evangelos Christou**, Department of Tourism Management, Alexander Technological Institute of Thessaloniki, *Greece*
- **Irena Ateljevic**, Cultural Geography Landscape Center, Wageningen University, *Netherlands*
- **Irena Nančovska Šerbec**, Department of mathematics and computing, Faculty of education, University of Ljubljana, *Slovenia*
- **Iskra Christova-Balkanska**, Economic Research Institute, Bulgarian Academy of Sciences, *Bulgaria*
- **Joanna Hernik**, Faculty of Economics, West Pomeranian University of Technology, Szczecin, *Poland*
- **Karsten Staehr**, Tallin School of Economics and Business Administration, Tallin University of Technology, *Estonia*
- **Ksenija Vodeb**, Department of Sustainable Tourism Destination, Faculty of Tourism Studies - TURISTICA, University of Primorska, *Slovenia*
- **Kaye Chon**, School of Hotel and Tourism Management, the Hong Kong Polytechnic University, *China*
- **Pèter Kovács**, Faculty of Economics and Business Administration, University of Szeged, *Hungary*
- **Ramona Rupeika-Apoga**, Faculty of Economics and Management, University of Latvia, *Latvia*
- **Renata Tomljenović**, Institute for Tourism, Zagreb, *Croatia*
- **Valentin Munteanu**, Faculty of Economics and Business administration, West University of Timisoara, *Romania*

Content

Vlatko Cingoski, Biljana Petrevska

Flexible Textile Photovoltaics: Application of New Generation in Tourism 5-18

Narcisa Blazevska

The Role of the Mentor in Developing a Reflexive Teacher-Trainee 19-25



FLEXIBLE TEXTILE PHOTOVOLTAICS: APPLICATION OF NEW GENERATION IN TOURISM

Vlatko Cingoski¹, Biljana Petrevska^{2*}

¹Faculty of Electrical Engineering, University Goce Delcev - Stip, Macedonia

²Faculty of Tourism and Business Logistics, University Goce Delcev - Stip, Macedonia

*Corresponding author: biljana.petrevska@ugd.edu.mk

Abstract

The paper presents some notable advances of a so-called new kind of materials, including textiles that exhibit photovoltaic (PV) qualities, i.e. they have the capacity to produce energy. In this line, a closer look is put on the mechanism of energy generation by means of solar cells that are used today. Hence, a brief elaboration is made on some of the newly developed 3G PV cells by presenting of what they are made of, their production process, work characteristics, mechanical characteristics, some of their positive and negative traits as materials and most common uses. Finally, the paper discusses some potential application of such PV cells in the hotel industry and in general in the tourism industry as energy sources for increasing energy efficiency and additional renewable and environmentally friendly energy resources.

Key words:

Energy efficiency, Photovoltaics, Tourism, Hotel management.

INTRODUCTION

Photovoltaics (PV) have started replacing fossil fuels as major energy generation roadmaps, targeting higher efficiencies and/or lower costs are aggressively pursued to bring PV to cost parity with grid electricity. Staring with first generation semiconducting p-n junctions and the second generation thin film cells, the third generation PV technologies may overcome the fundamental limitations of photon to electron conversion in single-junction devices and, thus, improve both their efficiency and cost. Even more, recently developed “inorganics-to-organics” 4G polymer solar cells, brought new challenges for development, investigation and application of such sophisticated energy resources in various fields.

Recently, mostly due to exhaustion of other conventional energy resources, especially fossil-based fuels, various alternative renewable energy sources including that obtained by solar cells have attracted much attention. Fossil fuels lead to high emissions of CO₂ and other pollutants and consequently have aggravating influence on human health due to adverse environmental conditions. On the other hand, the PV energy generated using various types of solar cells, is one of the cleanest, most applicable and promising alternative energy using limitless sun light as raw energy source (Singh, 2011; Kumar & Rosen, 2011).

From the physical viewpoint, the PV conversion represents the direct conversion of sunlight into electricity without any heat engine to interfere. Photovoltaic devices are rugged and simple in design requiring very little maintenance and their biggest advantage being their construction as stand-alone systems to give outputs from microwatts to megawatts. Hence they have wide implementation range used for power source, water pumping, remote buildings, solar home systems, communications, satellites and space vehicles, and for even megawatt scale power plants (Parida et al., 2011).

PV history could be traced back to 1839, when Alexandre-Edmund Becquerel observed that “electrical currents arose from certain light induced chemical reactions”. However, in the late 1940s the development of the first solid state devices paved the way for production of the first silicon-based solar cell with modest efficiency of only 6%. Presently, various types of solar cells are commercially available, however, strive for research and development continuously expand, improve and invent even better types of solar cells. The growth of such technology strongly depends on materials and structure development; however the goal will always be: maximum power at minimum cost. The historical development of solar cells usually is divided into several major deployment stages, called generations, the silicon-based solar cells being the so-called first generation (1G) of solar cells. Second generation (2G) of PV or solar cells is usually closely associates with the emerging of the thin-film solar cells, while the third generation (3G), currently widely analyzed and full of potential generation, is so-called “tandem” or “organic” PV cells.

Thus, although the inorganic solar cells (generally silicon-based solar cells) still dominate in today's world photovoltaic market, organic solar cells as the new emerging PV cells has explored new possibilities for different smart applications with their advanced properties including flexibility, light-weight, and graded transparency. In addition, the low cost production and easy processing of organic solar cells comparing to conventional silicon-based solar cells make them interesting and worth employing for personal use and large scale applications (Bedeloglu, 2011; Galagan & Andriessen, 2012; Anctil & Fthenakis, 2012; Sohrabi, 2013).

Today, the smart textiles as the part of technical textiles using smart materials including photoactive materials, conductive polymers, shape memory materials, etc.

are developed to mimic the nature in order to form novel materials with a variety of functionalities. These new solar cell-based textiles have found its application in various novel field and promising development obtaining new features. The photovoltaic textile materials can be used to manufacture power wearable, mobile and stationary electronic devices to communicate, lighten, cool and heat, etc. by converting sun light into electrical energy. The photovoltaic materials can be integrated onto the textile structures especially on clothes, however, the best promising results from an efficient photovoltaic fiber has to be come which can constitute a variety of smart textile structures and related products (Singh, 2011).

This paper presents some notable advances in these technologies, namely organic, nanostructures, polymer and dye-sensitized solar cells and their potential applications in the tourism and hotel industry.

Photovoltaic effect, photovoltaic cells, and their classification

The basic physical process within solar cells is the process called photovoltaic effect. The photovoltaic effect is a process that generates voltage or electric current in specially designed physical materials when they are exposed to sunlight, i.e. process of conversion of sunlight into electrical energy. A key feature of photovoltaic systems is their ability to provide direct and instantaneous conversion of solar energy into electricity without complicated mechanical parts or integration.

These specially designed materials with photovoltaic properties are commonly called photovoltaic (PV) or solar cells. They are composed of two different types of semiconductors, a p-type and an n-type semiconductors that are joined together to create a so-called p-n junction. By joining these two types of semiconductors, an electric potential field is formed in the region of the junction as electrons move to the positive p-side and holes move to the negative n-side. This electric potential field causes negatively charged particles to move in one direction and positively charged particles in the other direction, thus enables flow of electric current (Figure 1).

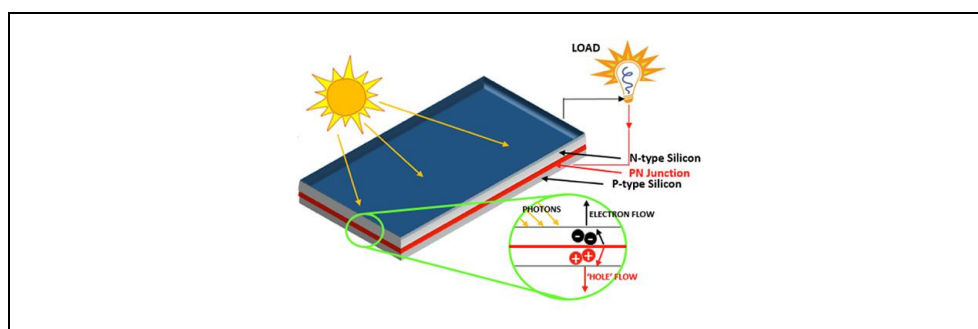


FIG 1. PHOTOVOLTAIC EFFECT AND THE BASICS FOR OPERATION OF A SOLAR CELL

Source: <http://www.eworkzpower.pk/how-solar-works.php>

Photovoltaic systems can be further distinguished based on the solar cell technology (Figure 2). Silicon (Si) based technologies can be categorized as a crystalline silicon and amorphous silicon or thin film, and are considered the most mature. Crystalline silicon cells can have different crystalline structures: mono-crystalline (mono-crystalline) silicon, multi-crystalline silicon and ribbon cast multi-crystalline silicon (Kumar & Rosen, 2011).

The 1G of PV technologies was made of crystalline structure which used silicon (Si) to produce the solar cells that are combined to make PV modules. However, this technology even today is not obsolete rather it is constantly being developed to improve its capability and efficiency. Mono-crystalline, multi-crystalline, and emitter wrap through (EWT) are cells under the umbrella of silicon crystalline structures and are still widely used as solar cells in various applications.

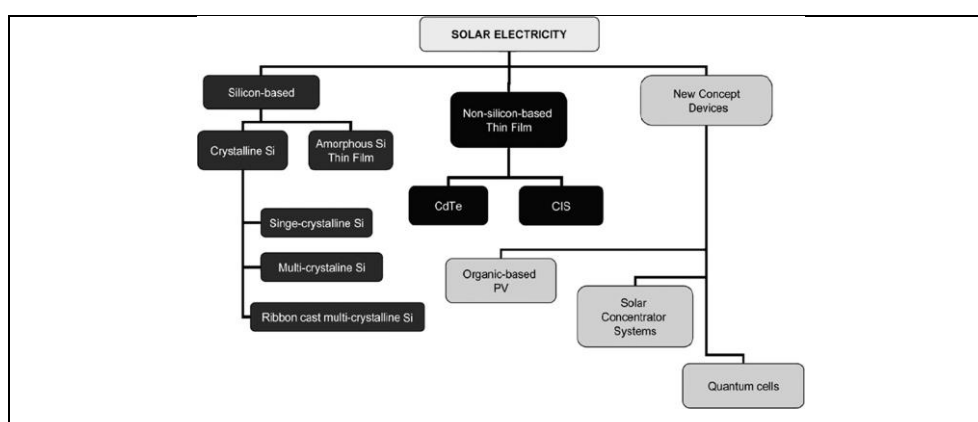


FIG. 2. CLASSIFICATION OF PV CELLS

Source: Akarslan. (2012).

Mono (single)-crystalline photovoltaic cells/panels

This type of cell is the most commonly used, constitutes about 80% of the market recently and will continue to be used until a more efficient and cost effective PV technology is developed (Chaar et al., 2011). Because these cells essentially use crystalline Si $p-n$ junctions, currently attempts to enhance the efficiency are limited by the amount of energy produced by the photons since it decreases at higher wavelengths. The maximum efficiency of mono-crystalline silicon solar cell has reached around 23%, but the highest recorded was 24.7%. However, module efficiencies always tend to be lower than the actual cell and Sun power recently announced 20.4% full panel efficiency. These types of mono-junction, silicon-wafer devices are now commonly referred to as the first generation (1G) technology, the majority of which is based on a screen printing-based device.

Multi (poly)-crystalline photovoltaic cells/panels

The efforts of the photovoltaic industry to reduce costs and increase production level have led to the development of new crystallization techniques (Chaar et al., 2011). Initially, multi-crystalline was the dominant and more attractive in the solar industry

because manufacturing cost is lower even though these cells are slightly less efficient (15%) than mono-crystalline. The advantage of converting the production of crystalline solar cells from mono-silicon to multi-silicon is to decrease the flaws in metal contamination and crystal structure. Multi-crystalline cell manufacturing is initiated by melting silicon and solidifying it to orient crystals in a fixed direction producing rectangular ingot of multi-crystalline silicon to be sliced into blocks and finally into thin wafers (Figure 3).

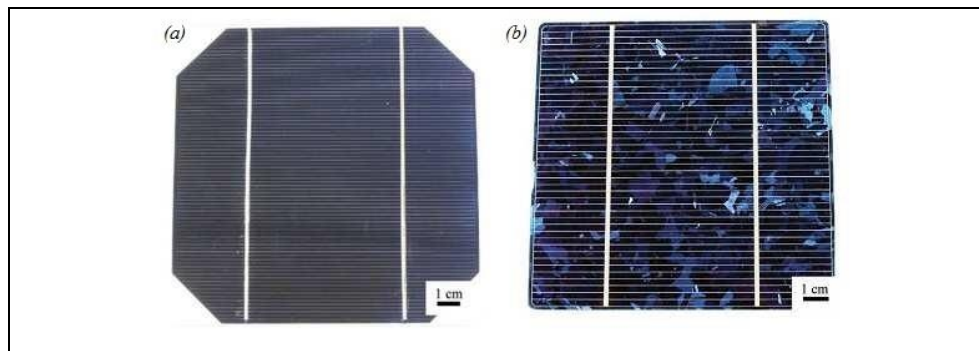


FIG 3. PHOTOGRAPHS OF (A) CRYSTALLINE, AND (B) MULTI-CRYSTALLINE SI SOLAR CELLS

Source: Akarslan. (2012).

THIN FILM TECHNOLOGY

The second generation (2G) of solar cells is usually named as thin-film solar cells. A thin-film solar cell is made by depositing one or more thin layers or thin film (TF) of photovoltaic material on a substrate, such as glass, plastic or metal. Thin-film solar cells are commercially used in several technologies, including cadmium telluride (CdTe), copper indium gallium diselenide (CIGS), and amorphous thin-film silicon (a-Si, TF-Si). Thin films greatly reduce the amount of semiconductor material required for each cell when compared to silicon wafers and hence lowers the cost of production of photovoltaic cells (Parida et al., 2011).

Unlike crystalline forms of solar cells, thin film panels are created by depositing thin layers of certain materials on glass or stainless steel (SS) substrates, using sputtering tools. The advantage of this methodology lies in the fact that the thickness of the deposited layers which are barely a few micron (smaller than $10\ \mu\text{m}$) thick allows the creation of flexible PV modules. Technically, the fact that the layers are much thinner, results in less photovoltaic material to absorb incoming solar radiation, hence the efficiencies of thin film solar modules are lower than crystalline.

THIRD GENERATION OF SOLAR CELLS

With further research, various improvements and inclusion of new materials in the existing 2G of thin film solar cells, recently a new so-called emerging or third generation photovoltaic cells (3G) has become commercially available. Among them the most promising are the organic, dye-sensitized ("Grätzel cell"), and polymer solar cells, as well as quantum dot, copper zinc tin sulfide (CZTS), nanocrystal, micromorph, and Perovskite solar cells (Chaar et al., 2011).

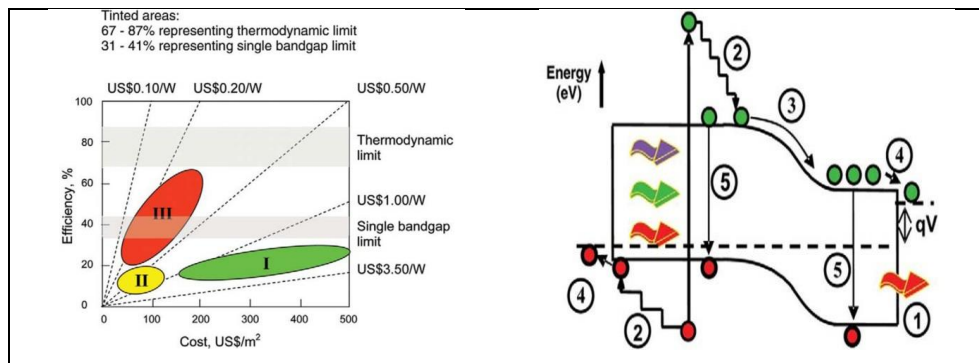


FIG. 4. (a) Efficiency and cost projections for first- (I), second- (II), and thirdgeneration (III) PV technologies, (b) Loss processes in a standard solar cell: (1) non absorption of below bandgap photons; (2) lattice thermalization loss; (3) and (4) junction and contact voltage losses; (5) recombination loss (radioactive recombination is unavoidable).

Source: Sohrabi et al., (2011).

The main aim of third generation solar cell is obtaining high efficiency. To achieve such efficiency improvements, devices aim to circumvent the Shockley-Queisser limit for single bandgap devices that limits efficiencies to either 31% or 41%, depending on concentration ratio (Sohrabi et al., 2011). Researchers showed that it is possible to greatly improve on a single-junction cell by stacking thin layers of material with varying energy barriers on top of each other and creating so-called "tandem cell" or "multi-junction" cell (Figure 4a). Traditional silicon preparation methods do not lend themselves to this approach. Most tandem-cell structures are based on higher performance semiconductors, notably gallium arsenide (GaAs). Three-layer GaAs cells achieved 41.6% efficiency for experimental examples, while on September 2013, a four layer cell reached 44.7 percent efficiency. A theoretical "infinity-layer" cell would have a theoretical efficiency of 68.2% for diffuse light. The second benefit of this type of solar cells is decreasing the losses, especially the lattice thermalization loss that could be achieved by capturing carriers before thermalization (Figure 4b).

Finally, the 4G of solar cells which are still not commercially widely available are organic cells with polymer binding having donor and acceptor pair. The concept of these 4G solar cells has been developed with the aim of realizing both improved charge transport and an improvement in the optical coupling, in polymer solar cells through the incorporation of inorganic nanostructures into the device architecture. In

addition to the optical and electronic benefits of incorporation of inorganic systems within active materials, certain inorganic materials are also known to improve the device lifetime as well.

Therefore, as can be seen, the developments and improvements of the solar cell production is continues and concentrated on several important tasks such as improving their efficiency, decreasing the production cost, prolongation of their life expectance and increase the flexibility and variety of their potential applications. Schematically, the historical path starting from 1G of solar cells up to the present 4G of solar cells is given in Figure 4, (Imalka Jayawardena et al., 2013).

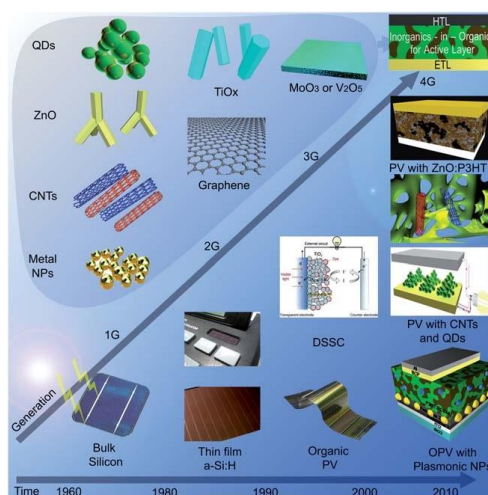


FIG. 4. TIMELINE OF THE FOUR GENERATIONS OF PHOTOVOLTAIC DEVICES FROM FIRST GENERATION (1G) TO FOURTH GENERATION (4G)

Source: Imalka Jayawardena et al., (2013).

Beside classification based on the solar cell technology, solar cells could be classified on the basis of their installations into four main types: grid-tied centralized (large power plants); grid-tied distributed (roof/ground mounted small installations); off-grid commercial (power plants and industrial installations in remote areas); and off-grid (mainly stand alone roof/ground based systems for houses and isolated applications). The balance-of-system requirements of each installation differ significantly, e.g. off-grid stand alone applications often require a battery bank or alternative electrical storage capacity (Kumar & Rosen, 2011).

FLEXIBLE PHOTOVOLTAIC TEXTILES

The solar cell-based textiles are very good example of so-called organic solar cells that have recently found its application in various novel field and promising development obtaining new features. The photovoltaic textile materials can be used to manufacture power wearable, mobile and stationary electronic devices to communicate, lighten, cool and heat, etc. by converting sun light into electrical energy. The photovoltaic

materials can be integrated onto the textile structures especially on clothes, however, the best promising results from an efficient photovoltaic fiber has to be come which can constitute a variety of smart textile structures and related products (Singh, 2011).

Organic solar cells made of organic electronic materials based on liquid crystals, polymers, dyes, pigment etc. attracted maximum attention of scientific and industrial community due to low weight, graded transparency, low cost, low bending rigidity and environmental friendly processing potential. Various photovoltaic materials and devices similar to solar cells integrated with textile fabrics can harvest power by translating photon energy into electrical energy.

Manufacturing of organic photovoltaic cells

As a common transparent electrode in polymer-based solar cells, indium tin oxide (ITO) was used due to its remarkable efficiency and ability of light transmission. However, it is quite expensive and generally too fragile to be used with flexible textile substrates. Therefore, some other highly conductive materials such as poly (3,4-ethylenedioxythiophene) doped with poly(styrene sulfonate), carbon nano-tube or metal layers are used to substitute ITO electrode (Singh, 2011).

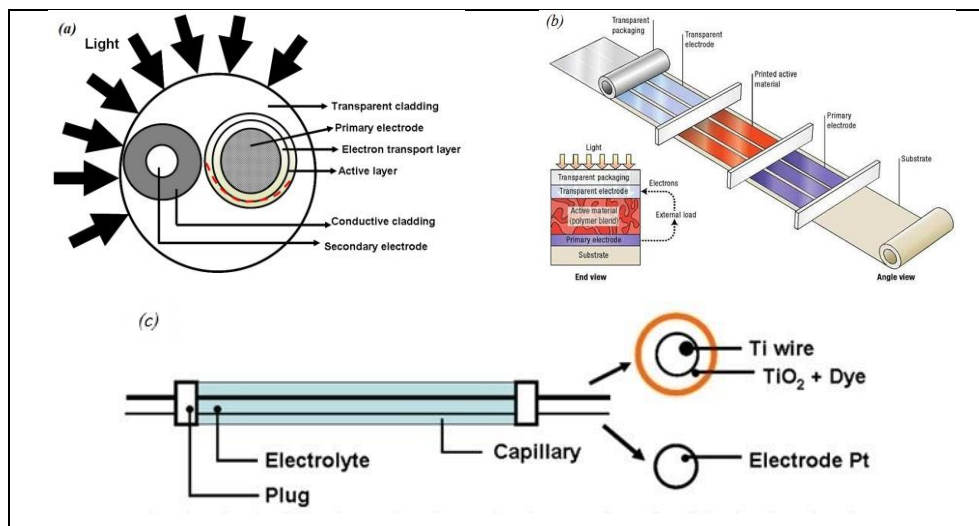


FIG. 5. SOME EXAMPLES OF PRODUCTION OF TEXTILE PVS A) PV FIBER, B) PRINTING PV ON PLASTICS, AND C) DYE-SENSITIZED SOLAR SELL

Source: Singh. (2011).

Four mostly utilized techniques for obtaining textile fabrics with PV properties are:

- PV textiles with PV fibers;
- Dye-sensitized textile PV;
- PV textiles with thin film deposition; and
- PV textiles obtained with printing of plastic solar cells.

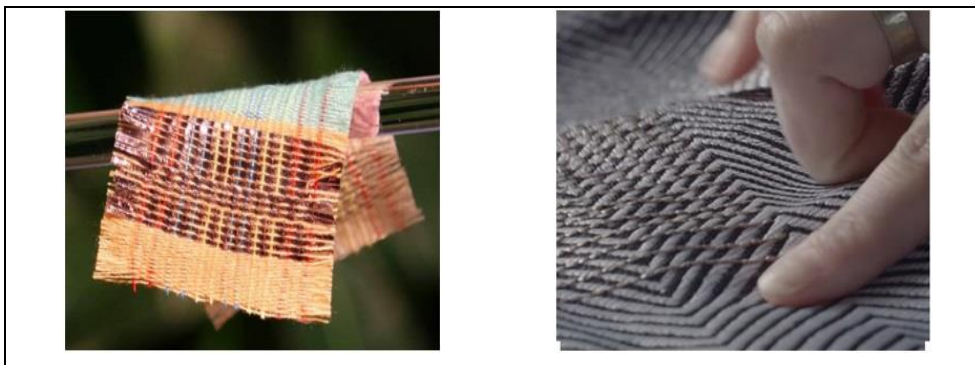


FIG. 6. EXAMPLES OF TEXTILE WITH PV PROPERTIES

Source: Singh. (2011).

SOME APPLICATIONS OF THE NEW GENERATIONS PV CELLS

The triggering point into wider commercial utilization and production of PV cells (solar cells) was their ability to convert the sunlight into electricity. Thus, they soon became alternative, renewable and almost inexhaustible energy sources to the existing fossil-based energy sources. However, as the time passed, the research in this field increased and certain advances were made in this field, the focus of interest gradually shifted to further exploration of cost advantages and application flexibilities.

Today the solar cells of all generations are widely used for various applications. The electricity produced by solar cells can be utilized in many applications such as cooling, heating, lighting, charging of batteries and providing power for different electrical devices (Curran et al., 2009). Solar cells using first generation technology have high areal production costs and moderate efficiency. Although with modest efficiency, the second generation solar cells, so-called thin-film solar cells have advantages such as increased size of the unit of manufacturing and reduction in material costs. Consequently, third generation technology concept has been developed to eliminate disadvantages of earlier photovoltaic technologies mostly into two directions: to achieve very high efficiencies and second one, to achieve cost per watt balance via moderate efficiency at low cost. Finally, this third generation solar cells, mostly renowned as organic solar cells, provides large flexibility of the cells enabling wide range of applications that were almost impossible with previous generations of solar cells. In this chapter, we would briefly address some applications that might be of interest especially in modern tourism and hotel industry.

Building-integrated photovoltaic (BIPV) systems

The widely used solar technology application is during the building of the new hotel and tourism facilities. Using modular approach a set of solar cells, mostly of the first generation could be used mainly for generation of additional power for the facility,

increasing the energy efficiency and improving their environmental footprint, which leads towards development of co-called “green-tourism” (Petrevska & Cingoski, 2016; Petrevska et al., 2016; Petrevska & Cingoski, 2017).



FIG. 7. EXAMPLES OF BUILDING-INTEGRATED PHOTOVOLTAIC (BIPV) SYSTEMS

Source: Cingoski. (2017).

BIPV systems incorporate photovoltaic properties into building materials such as roofing, siding, and glass and thus offer advantages in cost and appearance as they are substituted for conventional materials in new construction (Cingoski, 2017). Moreover the BIPV installations are architecturally more appealing than roof-mounted PV structures. Additionally, some architects proposed a building design to have the PV modules shade the building in summer, so as to reduce cooling loads, while at the same time allowing solar energy to enter the building during the heating season to provide daylight and conducted an analysis of the system performance, evaluation of the system efficiency and the power output. This nowadays classical approach for solar cells application could be seen almost everywhere for hotel facilities located at the costal or high-mountain resorts with significant amount of sunny days per year.

Solar shades, solar glazing and solar windows

In case of already constructed facilities, usually it is not feasibly to make changes in the construction or doing any other large reconstruction works. However, the solar cell technology provides solution even for such cases, such as installation of solar shades, solar window glazing and/or solar windows.

Solar shading is one of the easiest methods for decreasing the cost for HVAC in any modern hotel facilities. It is based on the physical properties of the sun which moves on the sky at different angle towards the buildings as show in Figure 8. By installing solar shades at the appropriate angle, one could allow direct sunlight during the winter period for additional heating and in the same time shade direct sun during summer period and avoid unwanted heating of the space.

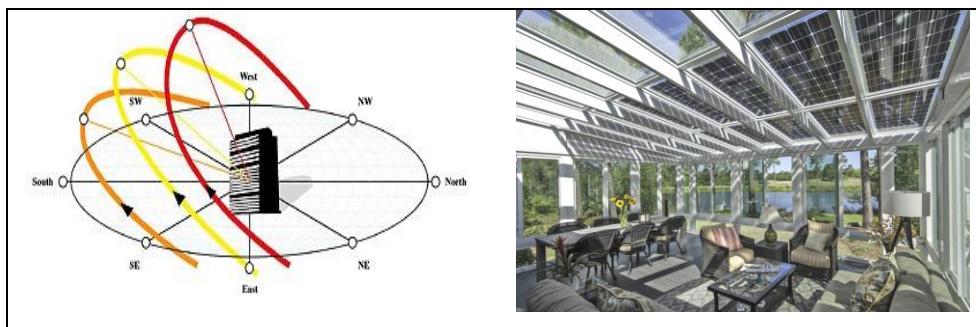


FIG. 8. SOLAR SHADING BASICS AND EXAMPLE IN HOTEL INDUSTRY

More recently, additional solar technologies became available in the form of solar glazing technology (Figure 9a), or even more for the recently developed solar windows which utilize fully transparent solar cell technology (Figure 9b). The solar glazing technology enables additional cooling effects, therefore increase of energy efficiency, while the transparent solar cell provides additional generation of power with keeping all good properties of the ordinary glass window. Having into account that almost all hotel and other tourism oriented facilities have large window area, implementation of such technologies could significantly improve the energy balance of such buildings.

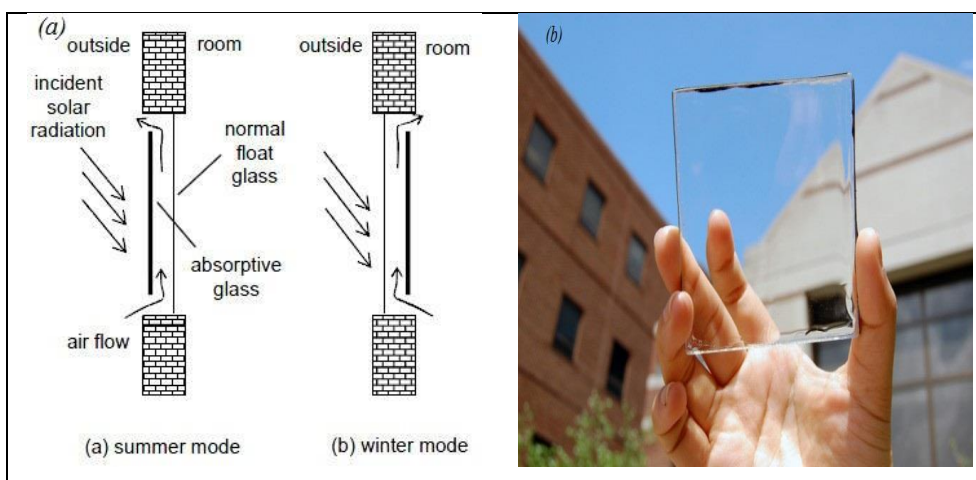


FIG. 9. (A) SOLAR GLAZING TECHNOLOGY, AND (B) FULLY TRANSPARENT SOLAR CELLS

Application of organic textile fiber solar cells

Finally we would briefly address some potential application of the latest solar cell technology based on the organic textile fiber solar cells in the hotel or tourism industry. Implementation of solar cell technology on the flexible textile fibers opens a whole new area of implementation of such sophisticated devices. Initially used in military industry for special power generated military cloths, these fabrics quickly push their way into other more mundane application, such as solar curtains, tents or modern high-tech textile industry for clothing. Some of the recently developed applications of such textile solar cells are given in Figure 10.

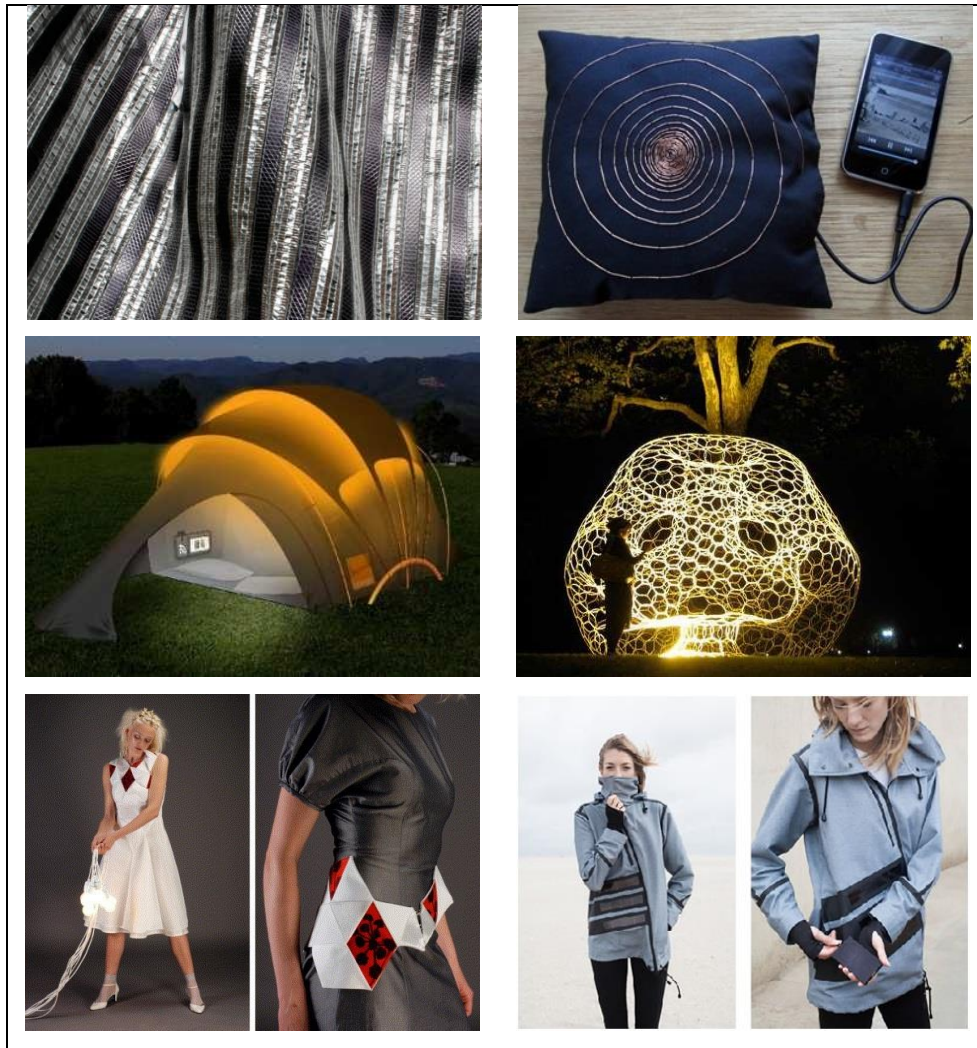


FIG. 10. SOME RECENT APPLICATION OF TEXTILE (ORGANIC) SOLAR CELL TECHNOLOGY

CONCLUSION

Electricity produced from photovoltaic (PV) systems has several benefits over other mostly fossil fuels power sources such as need no fuel, give off no atmospheric or water pollutants and require no cooling, thus they do not contribute to global warming or acid rain problems. The use of PV systems is not constrained by material or land shortages and the sun is a virtually endless energy source. Current PV cells are reliable and already cost effective in certain applications such as remote power, with stand-alone PV plants built in regions not reached by the utility networks. Various alternatives have been designed for building-integrated PV systems, including roof-top, facade and sun-shield systems. Most recently developed flexible organic textile solar cells even further broaden application area of such modern energy devices for application previously unrealistic using older solar cell generations.

In this paper, a brief review of major solar photovoltaic technologies comprising of photovoltaic systems, performance and reliability of PV system, environmental



aspects and PV applications is presented. The different applications of solar PV system such as building-integrated photovoltaic (BIPV) systems, solar shading, solar glazing and transparent solar windows, and few applications of flexible textile solar cells, with special aspect to the tourism and hotel industry, are also presented.

REFERENCES

- Akarşlan, F. (2012). Photovoltaic Systems and Applications, Modeling and Optimization of Renewable Energy Systems (Arzu Şencan (Ed.)), InTech, 21-52.
- Ancil, A. & Fthenakis, V. (2012). Life Cycle Assessment of Organic Photovoltaics, Third Generation Photovoltaics, (Vasilis Fthenakis (Ed.)), InTech, 91-110.
- Bedeloglu, A. (2011). Progress in Organic Photovoltaic Fibers Research, Solar Cells - New Aspects and Solutions, (Leonid A. Kosyachenko (Ed.)), InTech, 256-286.
- Chaar, L.E., Iamont, L.A. & Zein, N.E., (2011). Review of photovoltaic Technologies. Renewable and Sustainable Energy Reviews, 15, 2165-2175.
- Cingoski, V. (2017). Zgolemuvanje na energetska efikasnost i primena na obnovljivi energetski izvori vo komercijalno-administrativni objekti I objekti za domuvanje (pp. 6-29). In: Energetska efikasnost i ekoloskite unapreduvanja vo hotelskata industrija, UGD, Stip.
- Curran, S.A., Carroll, D.L. & Dewald, L. (2009). Fiber Photovoltaic Devices and Applications Thereof, Pub. No.: US2009/0301565 A1.
- Galagan, Y. & Andriessen, R. (2012). Organic Photovoltaics: Technologies and Manufacturing, Third Generation Photovoltaics, (Vasilis Fthenakis (Ed.)), InTech, 61-90.
- Imalka Jayawardena, K.D.G., Rozanski, L.J., Mills, C.A., Beliatas, M.J., Aamina Nismy, N. & Silva, S. Ravi P. (2013). Inorganics-in-Organics: recent developments and outlook for 4G polymer solar cells. Nanoscale, 5, 8411-8427.
- Kumar, R. & Rosen, M.A. (2011). A critical review of photovoltaic-thermal solar collectors for air heating, Applied Energy, 88, 3603-3614.
- Parida, B., Iniyar, S. & Goic, R. (2011). A review of solar photovoltaic technologies. Renewable and Sustainable Energy Reviews, 15, 1625-1636.
- Singh, M.K. (2011). Flexible Photovoltaic Textiles for Smart Applications, Solar Cells - New Aspects and Solutions, (Leonid A. Kosyachenko (Ed.)), InTech, 43-69.
- Sohrabi, F., Nikniazi, A. & Movla, H. (2013). Optimization of Third Generation Nanostructured Silicon-Based Solar Cells, Solar Cells – Research and Application Perspectives, (Arturo Morales-Acevedo (Ed.)), InTech, 1-25.

Petrevska, B. & Cingoski, V. (2017). *Branding the green tourism in Macedonia*. Sociology and Space, 55 (207(1)). 101-116.

Petrevska, B., Cingoski, V. & Gelev, S. (2016). *From Smart Rooms to Smart Hotels*. Conference proceedings from the XXI International conference: Information technology – Present and Future, Žabljak, Montenegro, 27.02-04.03.2017, 201-204.

Petrevska, B. & Cingoski, V. (2016). *Can Macedonian Hotels Be Green: The Evidence of Hotel "Flamingo" - Gevgelija, Macedonia*. Mechanical Engineering, 34(1), 311-321.