


Print ISSN 0554-5587  
On line eISSN 2406-1123  
UDK 631 (059)

# ПОЉОПРИВРЕДНА ТЕХНИКА

## AGRICULTURAL ENGINEERING

НАУЧНИ ЧАСОПИС  
SCIENTIFIC JOURNAL

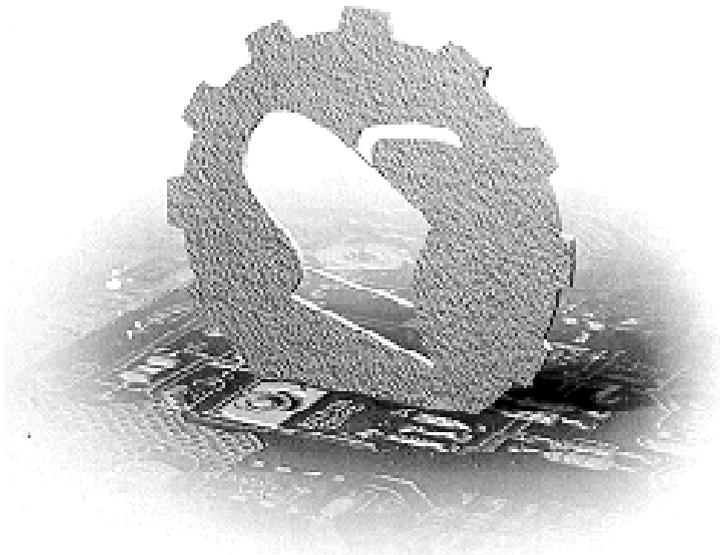

УНИВЕРЗИТЕТ У БЕОГРАДУ, ПОЉОПРИВРЕДНИ ФАКУЛТЕТ,  
ИНСТИТУТ ЗА ПОЉОПРИВРЕДНУ ТЕХНИКУ  
UNIVERSITY OF BELGRADE, FACULTY OF AGRICULTURE,  
INSTITUTE OF AGRICULTURAL ENGINEERING



Година XLIII, Број 1, 2018.  
Year XLIII, No. 1, 2018.

**Odgovorni urednik**

dr Mićo V. Oljača, redovni profesor, Univerzitet u Beogradu, Poljoprivredni fakultet

**Pomoćnik urednika**

dr Aleksandra Dimitrijević, vanredni profesor, Univerzitet u Beogradu, Poljoprivredni fakultet

**Tehnički urednik**

dr Kosta Gligorević, docent, Univerzitet u Beogradu, Poljoprivredni fakultet

**Urednici**

dr Mirko Urošević, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Dušan Radivojević, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Dragan Petrović, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Rade Radojević, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Vladimir Pavlović, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Olivera Ećim-Đurić, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Goran Topisirović, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Milovan Živković, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Zoran Mileusnić, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Rajko Miodragović, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Vesna Pajić, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Miloš Pajić, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Dušan Kovačević, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Nebojša Momirović, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Željko Dolijanović, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Milan Dražić, docent, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Zorica Sredojević, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Branko Radičević, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Ivan Zlatanović, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Ružica Stričević, profesor, Univerzitet u Beogradu, Poljoprivredni fakultet  
dr Lazar Savin, profesor, Univerzitet u Novom Sadu, Fakultet tehničkih nauka  
dr Anđelko Bajkin, profesor, Univerzitet u Novom Sadu, Poljoprivredni fakultet  
dr Mirko Komatina, profesor, Univerzitet u Beogradu, Mašinski fakultet  
dr Zoran Stamenić, profesor, Univerzitet u Beogradu, Mašinski fakultet  
dr Dragan Marković, profesor, Univerzitet u Beogradu, Mašinski fakultet  
dr Zoran Miljković, profesor, Univerzitet u Beogradu, Mašinski fakultet  
dr Vojislav Simonović, docent, Univerzitet u Beogradu, Mašinski fakultet  
dr Saša Barać, profesor, Univerzitet u Prištini, Poljoprivredni fakultet, Lešak  
dr Dragović M. Nada, profesor, Univerzitet u Beogradu, Šumarski fakultet  
dr Branka J. Kresović, Institut za kukuruz, Zemun polje, Beograd.

**Инострани уредници**

Professor Peter Schulze Lammers, Ph.D., University of Bonn, Faculty of Agriculture, Germany  
Professor László Magó, Ph.D., Szent Istvan Univ., Faculty of Mechanical Eng., Gödöllő, Hungary  
Professor Victor Ros, Ph.D., Technical University of Cluj-Napoca, Romania  
Professor Sindir Kamil Okyay, Ph.D., Ege University, Faculty of Agriculture, Bornova - Izmir, Turkey  
Professor Pietro Picuno, Ph.D., SAFE School, University della Basilicata, Potenza, Italy  
Professor Nicolay Mihailov, Ph.D., University of Rouse, Faculty of Electrical Engineering, Bulgaria  
Professor Igor Kovačev, Ph.D., University of Zagreb, Faculty of Agriculture, Croatia  
Professor Selim Škaljić, Ph.D., University of Sarajevo, Fac. of Agriculture, Bosnia and Hercegovina  
Professor Zoran Dimitrovski, Ph.D., University "Goce Delčev", Fac. of Mechanical Engineering, Štip, Macedonia  
Professor Sitaran D. Kulkarni, Ph.D., Central Institute of Agricultural Engineering, Bhopal, India  
Professor Francesco Conto, Ph.D., Director of the Dep. of Economics, Univ. of Foggia, Italy  
Professor Ladislav Nozdrovický, Ph.D., Faculty of Engineering., Slovak Univ. of Ag., Nitra, Slovakia  
Robert Jerončić, Ph.D, Ministry of Infrastructure, 1000 Ljubljana, The Republic of Slovenia  
Marjan Dolenšek, M.Sc., KGZS, 8000 Novo mesto, The Republic of Slovenia  
Professor dr Velibor Spalević, Dep. of Geography, University of Montenegro, 81000 Podgorica, Crna Gora  
Professor dr Velibor Spalević, University of Montenegro, 81000 Podgorica, Montenegro  
Professor Kuznetsov Yury Alekseevich, PhD, Orel State Agrarian University, 302019 Russian Federation  
Vasileios Firfiris, Ph.D, Aristotle University Of Thessaloniki, Thessaloniki, Greece  
Professor Ralph Sims, Ph.D, School of Engineering and Advanced Technology, Massey University, New Zealand

**Izdavački savet**

Prof. dr Milan Tošić, Prof. dr Petar Nenić, Prof. dr Marija Todorović, Prof. dr Dragiša Raičević, Prof. dr Đukan Vukić,  
Prof. dr Đuro Ercegović, Prof. dr Franc Kosi, Prof. dr Steva Božić, Prof. dr Lazar N. Ružičić, Prof. dr Ratko Nikolić,  
Prof. dr Enika Gregorić, Prof. dr Radivoje Topić, Prof. dr Milan Veljić, Prof. dr Miloš Tešić, Prof. dr Vlade Zarić

# ПОЉОПРИВРЕДНА ТЕХНИКА

НАУЧНИ ЧАСОПИС

AGRICULTURAL ENGINEERING

SCIENTIFIC JOURNAL

УНИВЕРЗИТЕТ У БЕОГРАДУ, ПОЉОПРИВРЕДНИ ФАКУЛТЕТ,  
ИНСТИТУТ ЗА ПОЉОПРИВРЕДНУ ТЕХНИКУ  
UNIVERSITY OF BELGRADE, FACULTY OF AGRICULTURE,  
INSTITUTE OF AGRICULTURAL ENGINEERING

WEB адреса (**WEB Address**)

[www.jageng.agrif.bg.ac.rs](http://www.jageng.agrif.bg.ac.rs)

**Издавачки савет (*Editorial Council*)**

Проф. др Милан Тошић, Проф. др Петар Ненић, Проф. др Марија Тодоровић,  
Проф. др Драгиша Раичевић, Проф. др Ђукан Вукић, Проф. др Ђуро Ерцеговић,  
Проф. др Франц Коси, Проф. др Стева Божић, Проф. др Лазар Н. Ружичић  
Проф. др Ратко Николић, Проф. др Еника Грегорић,  
Проф. др Радивоје Топић, Проф. др Милан Вељић  
Проф. др Милош Тешић, Проф. др Владе Зарић

**Техничка припрема (*Technical editor*)**

Доцент др Коста Глигорчевић, Пољопривредни факултет , 11080 Земун-Београд

**Лектура и коректура: (*Proofreader*)**

Проф. др Иван Златановић, Пољопривредни факултет , 11080 Земун-Београд

**Превод: (*Translation*)**

Проф. др Иван Златановић, Пољопривредни факултет , 11080 Земун-Београд

**Штампа (*Printed by*)**

Пољопривредни факултет , 11080 Земун-Београд

Часопис излази четири пута годишње

**Тираж (*Circulation*)**

350 примерака

Дистрибуција примерака часописа Пољопривредна техника за заинтересоване је бесплатна .

**Радови објављени у часопису индексирани су у базама (*Abstracting and Indexing*):**

AGRIS (International Information System for the Agricultural Science and Technology)

SCIndeks (Serbian Citation Index)

NAAS (National Academy of Agricultural Sciences - India)

ScienceMediaCentre

ArgosBiotech

CiteFactor (International Academic Scientific Journals)

J4F (Journals for Free).


**Издавање часописа помогло (*Publication supported by*)**

Министарство просвете, науке и технолошког развоја Републике Србије

На основу мишљења Министарства за науку и технологију Републике Србије према решењу бр. 413-00-606/96-01 од 24. 12. 1996. године, часопис Пољопривредна техника је ослобођен плаћања пореза на промет робе на мало.

## SADRŽAJ

PRIMENA ANAEROBNIH LEPKOVA KOD POPRAVKI MAŠINA Vladimir Bashkirtsev, Yury Kuznetsov, Larisa Kalashnikova .....	1-11
HIDROSTATIČKI SISTEMI PRENOSA SNAGE POLJOPRIVREDNIH MAŠINA: ZAPREMINSKE PUMPE Vera B. Cerović, Dragan V. Petrović.....	12-23
CFD SIMULACIJA PROCESA TEČENJA KROZ KRATKE PRIGUŠNICE SA OŠTRIM IVICAMA Sasko S. Dimitrov, Zoran M. Dimitrovski.....	24-31
PROBLEMATIKA UDESA SA POLJOPRIVREDNOM I ŠUMARSKOM TEHNIKOM U R. SLOVENIJI Marjan Dolenšek, Robert Jerončič, Kosta B. Gligorević, Mićo V. Oljača, Zoran Dimitrovski.....	32-40
MODELI I TERMODINMAČKE OSOBINE TANKIH KRIŠKI PARADAJZA SUŠENOG VRELIM VAZDUHOM Nnaemeka Nwakuba, Osita Chukwuezie, Sabbas Asoegwu, Godfrey Nwandikom, Ngozi Okereke .....	41-52



UDK: 621.22

Original research paper

## CFD SIMULATION OF THE FLOWING PROCESS THROUGH THE SHORT LENGTH SHARP EDGED ORIFICES

Sasko S. Dimitrov<sup>1</sup>, Zoran M. Dimitrovski<sup>1\*</sup>

*Goce Delcev University, Faculty of Mechanical Engineering - Stip, Macedonia*

**Abstract:** In this paper the static characteristics of the sharp edged orifices have been investigated. Mathematical relationship between pressure loss and flow through the orifice has been developed and solved for this type of orifices. A CFD simulation of the flowing process has been done. Full CAD model of the volume for orifices with different geometric parameters was created and meshed at finite number of elements. As a result of the CFD computations, few diagrams have been presented and compared to the theoretical ones. The discharge coefficient and the pressure loss coefficient have been obtained.

**Key words:** *orifice, pressure drop, flow, CFD, simulation, discharge coefficient.*

### INTRODUCTION

The flowing and pressure drop through the sharp edged short orifices have been investigated long time ago. In [2] a model for discharge coefficient in the orifice is introduced as a function of the Reynolds number. According to this model, discharge coefficient calculation requires iterative procedure because Reynolds number also depends on the flow rate. To avoid this iterative procedure, in [3] an empirical discharge coefficient model for orifice flow is recommended. Another model for the discharge coefficient is described in [4] by Borutzky. Those models provide a linear relation through the orifice for small velocities while for turbulent flows, they match the conventional square root characteristics. Also, the transition from the laminar to the turbulent regime is smooth [5].

---

<sup>1\*</sup> Corresponding author: Email: zoran.dimitrovski@ugd.edu.mk

In this paper a CFD method for simulation of the flowing process through the orifice is used, the pressure drop coefficient and the discharges coefficient have been determined and compared with numerical ones.

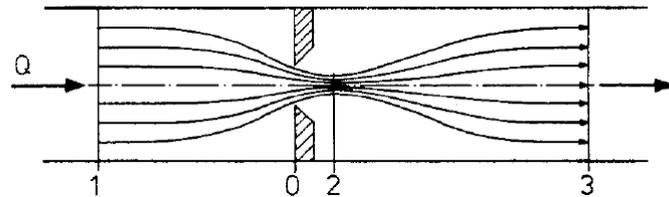


Figure 1. The short length sharp edged orifice

### MATHEMATICAL MODELING

Steady state flowing process through an orifice is presented in figure 1. Well known dependence on flow of the pressure drop is [6]:

$$Q = \alpha_D \cdot A_0 \cdot \sqrt{\frac{2}{\rho} \cdot \Delta p} \quad (1)$$

where:  $Q$  – the flow through the orifice;  $\alpha_D$  – the discharge coefficient;  $A_0$  - the area of the orifice,  $\Delta p = p_1 - p_3$ - the pressure drop in the orifice.

Pressure drop in the sharp edged short orifice can be expressed by the equation:

$$\Delta p = \xi \cdot \frac{\rho}{2 \cdot A_0} \cdot Q^2 \quad (2)$$

Where:  $\xi$  - the local resistant coefficient.

Comparing the eq. (1) and (2), the dependence among the discharge coefficient and the pressure drop coefficient, is:

$$\alpha_D = \frac{1}{\sqrt{\xi}} \quad (3)$$

For  $Re = 10 - 20000$  and  $l/d = 1.5 - 10$ , Lichtarowicz [7] has recommended an expression for discharge coefficient calculation:

$$\frac{1}{\alpha_D} = \frac{1}{\alpha_{Dmax}} + \frac{20}{Re} \cdot \left(1 + 2.25 \cdot \frac{l}{d}\right) \quad (4)$$

Where  $d$  - the orifice diameter;  $l$  - the orifice length.

Experimentally Wobben [8] has determined the maximal value of the discharges coefficient and it is  $\alpha_{Dmax} = 0.83$ .

Reynolds number for circle area is  $= \frac{v \cdot d}{\nu} = \frac{4 \cdot Q}{d \cdot \pi \cdot \nu}$ . Combining the last eq. for  $Re$ , into eq. (4) and introducing the correction factor  $\left[ \frac{20 \cdot \nu}{d} \cdot (1 + 2.25 \cdot (l/d)) \right]^2$ , the final equation for flow calculation in a sharp edged orifice has been obtained:

$$Q = \alpha_{Dmax} \cdot \frac{\pi \cdot d^2}{4} \cdot \sqrt{\frac{2}{\rho} \cdot \Delta p + \left[ \frac{20 \cdot \nu}{d} \cdot (1 + 2.25 \cdot (l/d)) \right]^2} - \alpha_{Dmax} \cdot 5 \cdot \pi \cdot d \cdot \nu \cdot \left( 1 + 2.25 \cdot \frac{l}{d} \right) \quad (5)$$

Knowing the geometric parameters of the orifice, applying eq. (5), it is possible to obtain the static characteristic of the orifice, i.e. the flow through the orifice depending on the pressure drop in the orifice.

### CFD SIMULATION OF THE FLOWING PROCESS THROUGH THE ORIFICES

To identify the discharge coefficient and the pressure drop in the orifice, a series of steady-state CFD computations was performed with commercial CFD software package *FLUENT*. Three different sizes of orifices have been investigated: *0.6 mm*, *0.8 mm* and *1.0 mm*. CAD model of the fluid volume has been created and it has been divided into around 310000 elements, depending on the size of the orifice. The meshing model of the *0.8 mm* orifice is presented on figure 2.

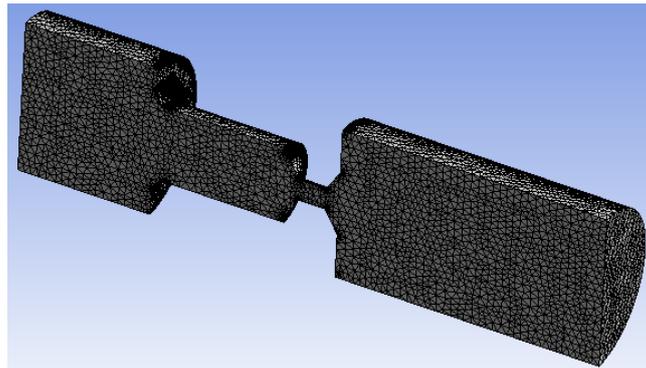


Figure 2. The CFD meshed geometry

As an input parameter was set the flow in the orifice. The output parameter, calculated by *FLUENT*, is the pressure drop through the orifice.

The results obtained by CFD simulation and the solution of the eq. (5) have been shown on fig.3. It is evident that there is very good match of the results between CFD simulation and the presented theory.

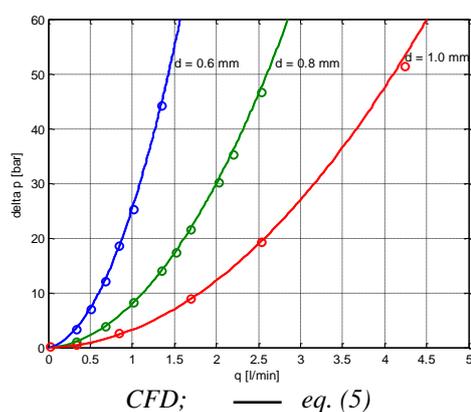


Figure 3. The static characteristics of the orifices


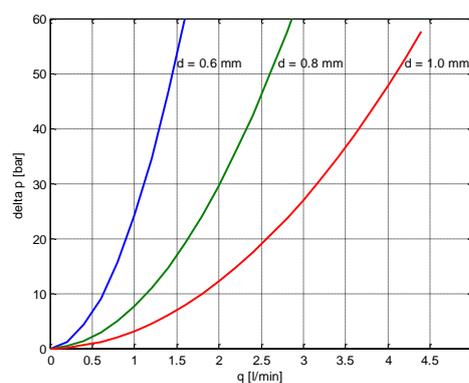


Figure 4. The theoretical static characteristics of the orifices

For simplicity of calculation, very often the pressure drop in the sharp edged orifice can be approximated by the eq. (2). According to this relation, for the local resistant coefficient  $\xi = 1.48$ , the curves on figure 5 have been obtained. It can be seen that there is good match between CFD simulation and relation (5) (figure 3) and the approximated eq. (2) figure 4. Applying the eq.(3), the flow coefficient is  $\alpha_D = 0.822$ , i.e. it tends to  $\alpha_{Dmax} = 0.83$ .

The values of the flow coefficient depending on the Reynolds number have been presented on figure 5. For turbulent regime of flowing the flow coefficient has constant value, but in the laminar regime of flowing, the flow coefficient is not constant, i.e. it varies depending on the average velocity of flowing in the orifice. If it is supposed using this sharp edged orifices in pilot pressure relief valves, usually the pilot flow in the pressure relief valves is around 1.0 – 1.5 [l/min]. So the  $Re$  number does not exceed the value of 1500. For simplicity of calculation, in the dynamic model of the pilot operated pressure relief valve an average value of 0.8 for flow coefficient can be taken.

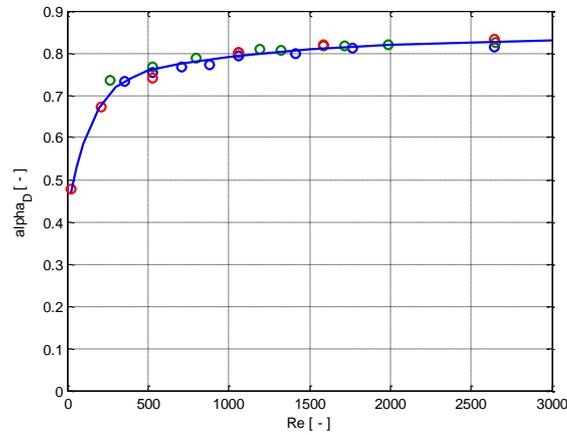

CFD; approximation

Figure 5. The discharge coefficient of the orifices

Figure 6 and figure 7 depict the pressure and velocity distribution for 0.8 mm sharp-edged orifice along the axis of the orifice. The pressure and velocity distribution do not differ qualitatively for different orifice diameters. The pressure drops quickly in the nozzle, then at the end of the nozzle the pressure little increase and then decrease and stay approximately constant. The velocity sharply rises in the nozzle and at the end of the nozzle begins to decrease.

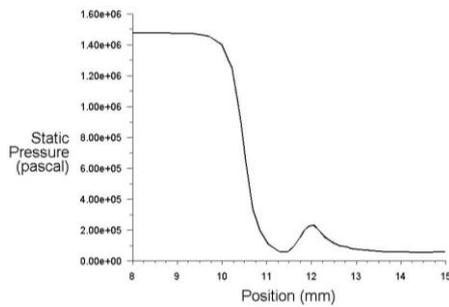


Figure 6. The pressure distribution along the orifice axis

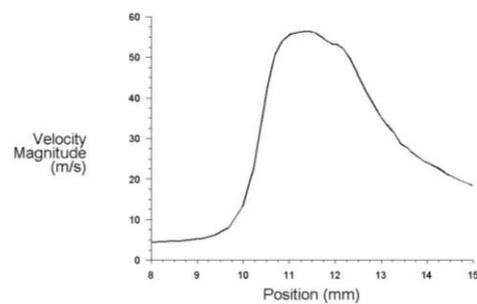


Figure 7. The velocity distribution along the orifice axis

Typical velocity contour and velocity vectors of 0.8 mm orifice diameter, with 1.35 l/min and 14 bar pressure drop in the orifice is presented on figure 8 and figure 9. The velocity contours and velocity vectors do not differ qualitatively for different orifice diameters. As it is expected, the maximal velocity occurs at the nozzle where the diameter is the lowest.

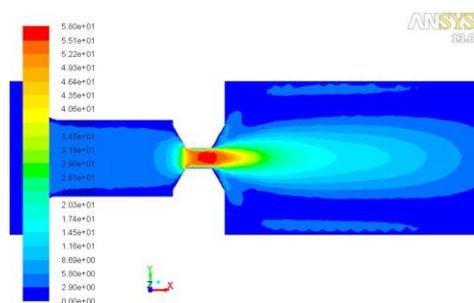


Figure 8. The velocity contour

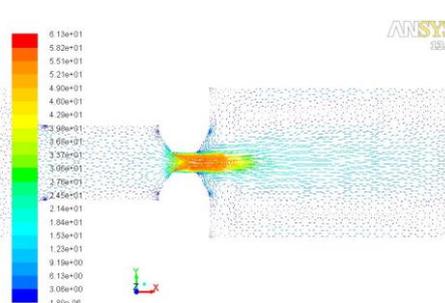


Figure 9. The velocity vectors

## CONCLUSIONS

Mathematical relationship between flow and pressure loss in the sharp edged orifices has been developed in this paper. This mathematical model was confirmed with CFD simulation. CAD model of the flowing volume was created and simulation of the flowing process has been made. Graphically was compared the results of the CFD simulation and the solution of the eq. (5). The flow coefficient depending on the Reynolds number was obtained and presented graphically on fig.5. It can be seen that increasing the  $Re$  number the discharge coefficient tends to the value of 0.83. The pressure and velocity distribution along the orifice axis was depicted and the velocity contour and velocity vectors were shown (figure 8 and figure 9).

## REFERENCES

- [1] Komitovski, M., Dimitrov, S. 2013. "Transient response process of a pilot operate pressure relief valve", XVIII National Scientific with International Participation, FPEPM 2013, Sozopol, Bulgaria, pp. 139-145.
- [2] Merritt, H.E., 1967. "Hydraulic Control Systems", John Wiley and Sons, 1967, 39-45.
- [3] Wu, D., Burton, R., Schoenau, G. 2002. "An Empirical Discharge Coefficient Model for Orifice Flow", International Journal of Fluid Power – ISSN 1439-9776, Vol. 3, No. 3, 17-24.
- [4] Borutzky, W., Barnard, B., Thoma, J. 2002. "An orifice flow model for laminar and turbulent conditions", Simulation Modelling Practice and Theory, Elsevier Science B. V., Vol. 10, 2002. pp.141-152.
- [5] Hos, C. 2005. "Dynamic Behavior of Hydraulic Drives", Dissertation, Department for Hydrodynamic Systems, Budapest Univ. of Technology and Economics, Budapest, pp.16-23.
- [6] Backé, W., Murrenhoff, H. 1994. "Grundlagen der Ölhydraulik. Institut für fluidtechnische Antriebe und Steuerungen", Technische Hochschule Aachen, pp. 26-28.
- [7] Lichtarowicz, A., Duggins, R., Markland, E. 1965. "Discharge Coefficients for Incompressible NonCavitating Flow Through Long Orifices", J. Mech. Eng. Sc. Nr. 2, pp. 210 – 219.
- [8] Wobben, G.D. 1978. "Statisches und dynamisches Verhalten vorgesteuerter Druckbegrenzungsventile unter besonderer Berücksichtigung der Strömungskräfte", Dissertation, RWTH Aachen, pp. 21-27.

**CFD SIMULACIJA PROTOKA FLUIDA KROZ  
KRATKE PRIGUŠNICE SA OŠTRIM IVICAMA****Sasko S. Dimitrov, Zoran M. Dimitrovski***Universitet Goce Delcev, Mašinski fakultet - Štip, Republika Makedonija*

**Sažetak:** U radu su istražene statičke karakteristike protoka fluida u prigušnicima oštih ivica. Za ovaj tip otvora razvijen je i rešen matematički odnos gubitka pritiska i protoka kroz otvore. Prikazana i urađena je CFD simulacija protoka. Izrađen je CAD model zapremine protoka sa različitim geometrijskim parametrima podeljen konačnim brojem elemenata. Kao rezultat CFD proračuna, prikazani su dijagrami koji su upoređeni sa teoretskim dijagramom. U proračunu su dobijeni koeficijent protoka i koeficijent gubitka pritiska.

**Key words:** prigušnice, pad pritiska, protok, CFD simulacija, koeficijent protoka.

Prijavljen: 18.02.2018  
Ispravljen: 18.03.2018  
Prihvaćen: 23.03.2018