

XV INTERNATIONAL SCIENTIFIC CONGRESS

SUMMER SESSION

12 - 15.09.2018, VARNA, BULGARIA



MACHINES TECHNOLOGIES MATERIALS 2018

PROCEEDINGS

VOLUME II

MACHINES

INDUSTRIAL INFORMATICS &

MATHEMATICAL MODELING

MANAGEMENT

ISSN 2535-0021 (Print)

ISSN 2535-003X (Online)

ORGANIZER

**SCIENTIFIC-TECHNICAL UNION OF MECHANICAL ENGINEERING
BULGARIA**

The FEDERATION OF THE SCIENTIFIC ENGINEERING UNIONS (FSEU)

in Bulgaria is a professional, scientific - educational, non-governmental, non-political non-profit association of legal entities - professional organizations registered under the Law on non-profit legal entities, whose members are engineers, economists and other specialists in the field of science, technology, economy and agriculture.

FSEU performed bilateral cooperation with similar organizations from many countries.

FSEU brings together 19 national associations - Scientific and Technical Unions / STU /, 34 territorial associations, which have more than 15 000 professionals across the country.

FSEU is a co-founder and member of the World Federation of Engineering Organizations (WFEO).

FSEU a member of the European Federation of National Engineering Associations (FEANI), and a member of the Standing Conference of engineering organizations from Southeast Europe / CO.PICEE /, Global Compact, European Young Engineers (EYE). The Federation has the exclusive right to give nominations for the European Engineer (EUR ING) title.

Contacts:

108 Rakovsky Str., Sofia 1000, Bulgaria

web: www.fnts.bg

e-mail: info@fnts.bg

INTERNATIONAL SCIENTIFIC CONFERENCE
MACHINES. TECHNOLOGIES. MATERIALS

12-15.09.2018, VARNA, BULGARIA

PROCEEDINGS

YEAR II, ISSUE 2 (9), SOFIA, BULGARIA 2018

VOLUME II
MACHINES
INDUSTRIAL INFORMATICS & MATHEMATICAL MODELING
MANAGEMENT

ISSN 2535-0021 (PRINT)
ISSN 2535-003X (ONLINE)

PUBLISHER:
**SCIENTIFIC TECHNICAL UNION OF MECHANICAL
ENGINEERING**

108, Rakovski Str., 1000 Sofia, Bulgaria
tel. (+359 2) 987 72 90,
tel./fax (+359 2) 986 22 40,
office@mtmcongress.com
www.mtmcongress.com

INTERNATIONAL EDITORIAL BOARD

Chairman: Prof. DHC Georgi Popov

Members:

Acad. Ivan Vedyakov	RU
Acad. Yuriy Kuznetsov	UA
Prof. Aleksander Mihaylov	UA
Prof. Anatoliy Kostin	RU
Prof. Adel Mahmud	IQ
Prof. Ahmet Ertas	TR
Prof. Andrzej Golabczak	PL
Prof. Boncho Bonev	BG
Prof. Gennady Bagluk	UA
Prof. Detlef Redlich	DE
Prof. Dipten Misra	IN
Prof. Dmitry Kaputkin	RU
Prof. Dmitry Dmitriev	UA
Prof. Eugene Eremin	RU
Prof. Ernest Nazarian	AM
Prof. Juan Alberto Montano	MX
Prof. Esam Husein	KW
Prof. Ilir Doci	KO
Prof. Ivo Malakov	BG
Prof. Katia Vutova	BG
Prof. Krasimir Marchev	USA
Prof. Leon Kukielka	PL
Prof. Lyudmila Ryabicheva	UA
Prof. Milan Vukcevic	ME

Vice Chair: Prof. Dr. Eng. Tsanka Dikova

Prof. Mihail Aurel Titu	RO
Prof. Mladen Velez	BG
Prof. Mohamed El Mansori	FR
Prof. Movlazade Vagif Zahid	AZ
Prof. Nikolay Dyulgerov	BG
Prof. Oana Dodun	RO
Prof. Olga Krivtsova	KZ
Prof. Peter Kostal	SK
Prof. Raul Turmanidze	GE
Prof. Renato Goulart	BR
Prof. Roumen Petrov	BE
Prof. Sasho Guergov	BG
Prof. Seiji Katayama	JP
Prof. Sergej Dobatkin	RU
Prof. Sergej Nikulin	RU
Prof. Stefan Dimov	UK
Prof. Svetan Ratchev	UK
Prof. Svetlana Gubenko	UA
Prof. Sveto Cvetkovski	MK
Prof. Tale Geramitchioski	MK
Prof. Vadim Kovtun	BY
Prof. Viktor Vaganov	RU
Prof. William Singhose	USA
Prof. Yasar Pancar	TR
Prof. Wu Kaiming	CN

CONTENTS

MACHINES

SYNTHESIS OF KINEMATICAL CONJUGATE SPATIAL GEARING

Assoc. Prof. Abadjieva E. PhD., Prof. Sc. D. Abadjiev V. PhD. 164

PRINTING PARAMETERS EFFECT ON SURFACE CHARACTERISTICS OF 3D PRINTED PLA MATERIALS

Kovan V., Tezel T., Topal E.S., Camurlu H.E. 168

REFINING THE PROCESS OF DESIGNING AN ELECTRICAL RESISTANCE HEATER FOR VACUUM FURNACE IN NON-STATIONARY PROCESS

PhD E. Angelova 172

DYNAMIC ANALYSIS OF BRIDGE CRANE WITH ONE MAIN GIRDER DURING TELPHER MOTION WITH FULL LOADING

Prof.dr. Ilir Doçi, Prof.ass. Shpetim Lajqi, Msc. Blerim Morina 175

SYNTHESIS OF VACUUM TUBES

Assos. Prof. DsC Zamfirov 179

СЪГЛАСУВАНЕ НА ЗАДВИЖВАНИЯТА НА СТРУГОВИ МАШИНИ С ЦИФРОВО-ПРОГРАМНО УПРАВЛЕНИЕ

Гл. ас. д-р инж. Жилевски М., Проф. д-р инж. Михов М. 182

ИЗБОР НА ПОДАВАТЕЛНИ ЗАДВИЖВАНИЯ ЗА ПРОБИВНИ МАШИНИ С ЦИФРОВО-ПРОГРАМНО УПРАВЛЕНИЕ

Гл. ас. д-р инж. Жилевски М. 186

IMPACT OF THE SPEED OF SLIDING OF FRICTION LINING ON THE TRIBOLOGICAL PARAMETERS OF FRICTION CLUTCHES OF MOTOR VEHICLES

M.Sc. Sasko Milev, PhD. Simeon Simeonov, PhD.Nikola Avramov, PhD.P.Simonovski, M.Sc.Gorgi Duskov, Eng. Elica Simeonova 190

MODELLING, SIMULATION AND IMPLEMENTATION OF AUTONOMOUS UNMANNED QUADROTOR

Yaser Alaiwi, Aşkın Mutlu 193

OPTIMIZATION RESEARCH OF THE CARGO PENDULUM AND UNITS DISPLACEMENTS OF THE GANTRY CRANES LEVEL LUFFING JIB SYSTEM

MSc. (Eng). Bargazov E., Assoc. Prof. PhD. Bortyakov D., Assoc. Prof. PhD. Uzunov T., Prof. DSc. Alipiev O., Principal assistant. PhD. Antonov S. 199

PROPOSAL OF THE ERGONOMIC PROGRAMME IMPLEMENTATION IN INDUSTRIAL PRACTISE

Eng. Václava Pokorná 205

INDUSTRIAL INFORMATICS & MATHEMATICAL MODELING

THE CONCEPT OF SYNTHESIS OF MOBILE ROBOTS

Prof. Dr. Kuznetsov Yu.N., Assoc. Prof. Polishchuk M.N. 206

EMBEDDED MICROPROCESSORY SCADA SYSTEM FOR SUPERVISORY, CONTROL AND DATA ACQUISITION IN THE PROCESS OF PURIFICATION OF GASES IN FERRO-NICKEL FACTORY.

Engineer Iliev Dejan. Ph.D Goce Stefanov 210

SYSTEM FOR SENTIMENT ANALYSIS OF BIG TEXT DATA

Assoc. Prof. Atanassov A., PhD Student Al-Barznji K., Senior Lecturer Tomova F. 214

USING PATTERNS IN ARCHITECTURE OF SOFTWARE ENGINEERING

M.Sc. Ivanova Milka 218

CALCULATION OF PARAMETERS OF TENSELY DEFORMED STATE OF DISK PIEZOELEMENTS WITH SURFACES PARTIALLY COVERED BY ELECTRODES

Dr. Bazilo C. PhD. 222

ОСНОВНИ СТРУКТУРНИ ЕЛЕМЕНТИ НА ТЕКСТА В УЕБ ТИПОГРАФИЯТА

гл. ас. д-р Илиев, И. 227

MANAGEMENT

ОСНОВНЫЕ ОЖИДАЕМЫЕ ПРОБЛЕМЫ В ПЕРИОД ОСУЩЕСТВЛЕНИЯ РЕФОРМЫ „ИНДУСТРИЯ-4.0“ И ПУТИ ИХ ПРАКТИЧЕСКОГО РЕШЕНИЯ НА ОСНОВЕ ПОВЫШЕНИЯ ЭФФЕКТИВНОСТИ ИСПОЛЪЗУЕМЫХ МЕХАТРОННЫХ СИСТЕМ

Doctor Of Science, Prof. Turmanidze R., Hon.D.Sc. Predrag D., Master Popkhadze G. 230

AIRCRAFT REPAIR MAINTENANCE IN UKRAINE: ECONOMIC AND ORGANIZATIONAL PROBLEMS OF DEVELOPMENT AND INVESTMENT SUPPORT

Doctor of Economic Sciences, Professor, Zhavoronkova G., PhD (Economics), Associate Professor, Zhavoronkov V., PhD (Economics), Associate Professor, Klymenko V. Graduate Student, Volvach M. 237

ENVIRONMENTAL IMPERATIVE OF INNOVATIVE INDUSTRIAL PRODUCTION

Struk A., Avdeychik O., Beresneva A. 241

THE CONCEPT OF KNOWLEDGE MANAGEMENT IN THE REGION AS A BASIS OF ESTIMATION OF CONDITIONS OF INNOVATIVE ACTIVITY

Prof. dr. Zaborovskaia O., Babskova O. PhD Student 244

KNOWLEDGE, CREATIVITY AND INNOVATION IN KNOWLEDGE SOCIETY FORMATION

Zhavoronkova G., Doctor of Economic Sciences, Professor, Zavalko K. Doctor of Pedagogical Sciences, Professor, Zhavoronkov V., PhD (Economics), Associate Professor 247

THE USE OF GLOBAL BEST PRACTICES OF EFFECTIVE MANAGEMENT OF THE COMPANY ARCELORMITTAL TEMIRTAU JSC

Gelmanova Z., Krivtsova O., Smailova A. 251

IMPACT OF THE SPEED OF SLIDING OF FRICTION LINING ON THE TRIBOLOGICAL PARAMETERS OF FRICTION CLUTCHES OF MOTOR VEHICLES

M.Sc. Sasko Milev ^{1)*}, PhD. Simeon Simeonov ^{1)*}, PhD. Nikola Avramov ^{2)*}, PhD. P. Simonovski ^{2)*}, M.Sc. Gorgi Duskov ^{3)*}, Eng. Elica Simeonova ^{3)*}

^{1)*} Faculty of Mechanical Engineering – Goce Delcev University in Stip, Macedonia

^{2)*} Faculty of Mechanical Engineering – Ss. Cyril and Methodius University in Skopje, Macedonia

^{3)*} Ruen Inox Automobile, Production of automotive clutches – Kocani, Macedonia

sasko.milev@ugd.edu.mk

Abstract: Friction clutches are mechanisms placed between the engine and the gearbox and are used to transmit the torque from the engine of the vehicle to the transmission. The clutches should provide start and stopping of the vehicle without vibration and need to have a certain lifetime. The tribological parameters of the linings in these clutches depend on several factors: the quality of the linings, the conditions of the test (exploitation), the temperature between the friction surfaces, the specific pressure between the friction surfaces, the speed of sliding of the friction linings, the number of turns on the clutch, etc. In this paper, will be analyzed the impact of the speed of sliding of friction linings on the tribological parameters of the linings.

Keywords: FRICTION CLUTCHE, FRICTION LINING, SPEED OF SLIDING, TRIBOLOGICAL PARAMETERS

1. Introduction

The quality of friction lining in friction clutches is expressed by tribological parameters-coefficient of friction and specific wear. These parameters depend on the sliding that occurs during the engagement of the clutch.

The linings are made from different materials and there are various factors that determine whether a material is quality or not. These factors are: the speed, the temperature and the pressure between the friction surfaces, the number of engagements of the clutch, etc.

The temperature in the lining depends on the load and the number of engagements of the clutch in the unit time. Greater temperature in the liner is created at higher loads and at a larger number of engagement. The temperature is one of the most influential factors. It acts on the structure of the lining. The raised temperature leads to the softening of the lining, decreasing of the coefficient of friction and increasing of the specific wear of the coating. The lining in its composition should have substances that will enable removal of the heat from the lining, that is, the lining should be resistant to high temperature, provide a stable coefficient of friction and wearing within the permissible limits.

The pressure of the lining is achieved by the compressive force of diaphragm wound springs or diaphragm springs. This force creates a friction torque between the friction surfaces of the lining and the pressure plate of the clutch, which transfers the engine power to the transmission. By reducing the specific pressure between the friction surfaces, the friction torque between them decreases, the switch-on time increases, which leads to an increase in the friction and in the temperature. The increasing of the pressure leads to increase in the switch off force, so in this case, when the clutch reloads, the clutch's protective role on one side decreases, and on the other hand, the switch-on time is too short. This means that the pressure affects the temperature of the lining. The specific pressure has a greater impact on the wearing of the lining, and the smaller the friction coefficient. The wearing of the lining is the smallest at a pressure of 20 [N/mm²]

By increasing the number of engagements of the clutch in the unit time, the temperature increases, thereby decreasing the coefficient of friction, and increasing the lining wearing. / 1/2/5 /

2. Research

The purpose of this research is to determine the impact of the sliding speed on the tribological parameters.

Determination of tribological parameters is performed according to the following expressions:

The specific workload when switching on the clutch is determined by expression [1]:

$$a = \frac{A_r}{F_{vk}} \left[\frac{J}{cm^2} \right] \quad (1)$$

A_r [J] - work of sliding during the engagement of the clutch

F_{vk} [cm²] - total friction surface

$$F_{vk} = z \cdot F \text{ [cm}^2\text{]} \quad (2)$$

$$F = \frac{\pi}{4} \cdot (D^2 - d^2) \text{ [cm}^2\text{]} \quad (3)$$

z - [-] number of friction surfaces

D - [cm] – outside diameter of the lining

d - [cm] – inner diameter of the lining

After determining of the specific workload, the specific heat load is determined by expression :

$$q = a \frac{x}{60} \text{ [W/cm}^2\text{]} \quad (4)$$

X [1/min] – clutch engagement frequency

The work of sliding accomplished during the engagement of the clutch is :

$$A_r = \frac{1}{2} J \cdot \omega^2 \text{ [J]} \quad (5)$$

ω [1/s] - angular speed on the bench test

$$\omega = \frac{\pi \cdot n}{30} \quad (6)$$

n - [1/min] – number of rotation

The specific depletion of the lining is determined by the expression :

$$g = \frac{\Delta b \cdot F}{A_{vk}} \text{ [cm}^3\text{/10MJ]} \quad (7)$$

A_{sr} [J] - average work per cycle

$$A_{vk} = \sum_{i=1}^n A_{sr} \quad (8)$$

n [-] – number of cycles

Clutch work of the sliding for a single cycle is calculated according to the expression :

$$A = \frac{M_{sr} \cdot \omega \cdot t}{2} \text{ [J]} \quad (9)$$

M_{sr} - the mean value of the torque read from the diagram of the machine for a given cycle

ω [1/s] - angular speed of the driven part

t [s] – time of sliding for given cycle

After determining A for each cycle, A_{sr} is determined as the mean value for one cycle, and then A_{vk} is determined as the total work from one test (product of the number of cycles and A_{sr}).

The coefficient of friction is determined by the expression :

$$\mu = \frac{M}{z \cdot r_{sr} \cdot P} \quad (10)$$

M [N m] – torque of the clutch

z [-] number of friction surfaces

r_{sr} [m] - average radius of friction lining

P [N] – pressing force of the clutch

$$r_{sr} = \frac{1}{2} \cdot d_{sr} \text{ [m]} \quad (11)$$

$$d_{sr} = \frac{2}{3} \cdot \left(\frac{D^3 - d^3}{D^2 - d^2} \right) \text{ [m]} \quad (12)$$

3. Experiment

The examination was carried out on a test bench with the following characteristics :

Electric motor with direct current, and having the following characteristics:

- rated power 204 [KW]
- nominal torque 955 [Nm]
- number of rotations
(with continuous change) (0-2,000) [1 / min]
- Main swing table with inertial torque 40 [kg m²]
- Shutdown time with setting (0-24) [mm]
- Force of disconnection 15 [KN]
- Torque that can be tested:
 - maximum torque 5.000 [Nm]
 - dynamic limit torque 3,500 [Nm]
- Additional inertia:
 - own inertial torque $J_s = 2.43$ [kg m²]
 - inertial torque of the variable swing weights:

$$1. J_s = 1.98 \text{ [kg m}^2\text{]}$$

$$2. J_s = 3.79 \text{ [kg m}^2\text{]}$$

$$3. J_s = 5.8 \text{ [kg m}^2\text{]}$$

$$4. J_s = 8.07 \text{ [kg m}^2\text{]}.$$

The following measurements were performed on the existing installation of the test bench:

- Measurement of the torque the clutch is transmitted at the moment of its engagement,
- Measuring the number of rotations of the drive unit,
- Measuring the number of rotations of the driven part,
- Measurement of the ambient temperature of the clutch

These data during the experiment are visually monitored on the given indicators of the measurement sizes.

To control the duration of a cycle, 4 potentiometers are used for individual parts of the cycle:

- t_1 - sliding time when switching on the clutch,
- t_2 - shutdown time,
- t_3 - time of slowing down the driven part,
- t_4 - time of control of the state of relative rest (this time is at time t_3).

Test mode:

- the inertial torque - 10.22 [kg · m²]
- switching frequency 0.6 [1 / min]
- speed [m / s] (number of rotations [1 / min]):
7.13 (500), 11.4 (800), 171 (1200), 22.7 (1600)

- specific work [J / cm^2]: 10.5, 27, 60, 107

The test was performed in three samples for 4 speeds and the mean values of the tribological parameters was used:

Table 1: The mean values of the used tribological parameters

a [J/cm^2]	10.5	27	60	107
V [m/s] (n [1/min])	7,13 (500)	11,4 (800)	171 (1200)	22,7 (1600)
μ	0,45	0,44	0,42	0,40
ϑ [$\text{cm}^3/10\text{Mj}$]	0,21	0,41	0,68	0,82

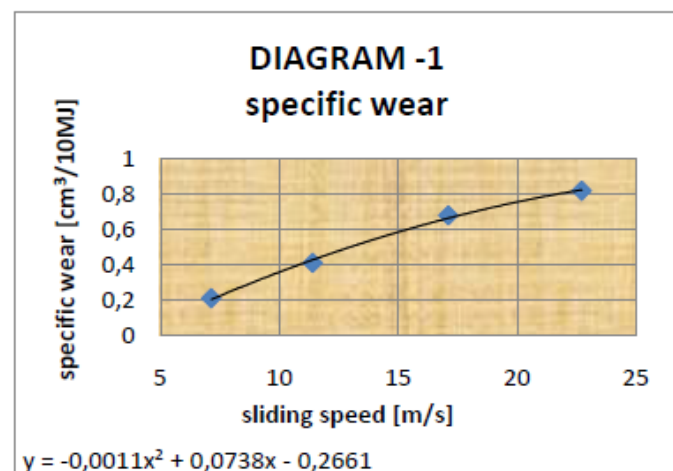


Fig.1. Change of the specific wear of the clutch depending on speed of sliding

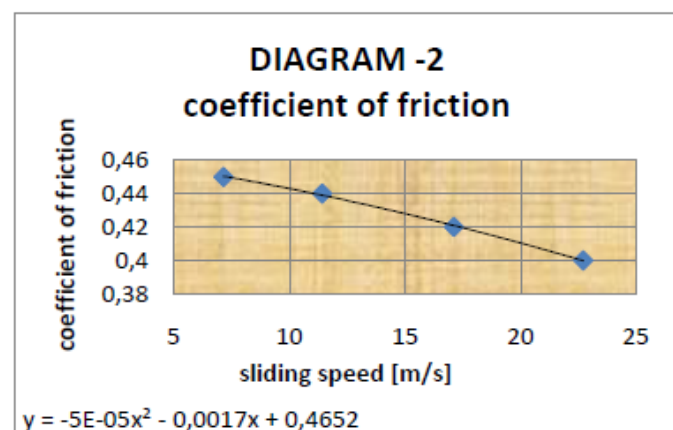


Fig.2. Change of the coefficient of friction of the clutch depending on speed of sliding

4. Analysis and conclusion

The speed of sliding on the friction surfaces depends on the number of rotations of the clutch and from the frictional radius of the clutch. The radius for a given clutch is constant, and the speed of sliding depends on the number of rotations of the clutch. Higher speed of sliding creates more heat on the lining, while the wearing torque, and therefore the coefficient of friction decreases. The wear of the lining is increasing. At lower speed, there is a greater friction coefficient, and less wearing.

The dependence of the frictional parameters on the speed of the tested lining is given with the expressions:

For the coefficient of friction: $y = -0,001x^2 + 0,0078x - 0,2661$

For specific wear: $y = -5E-05x^2 - 0,0017x + 0,4652$

These diagrams refer to a certain quality of linings. With another quality, similar curves will be obtained.

The performed tests, from a methodological approach, provide the possibility for further research in the domain of determining the influential components of the structure of the material of friction clutches, on the performance of the clutch. By expanding the tests, the dependence of the coefficient of friction and the specific wear of the friction lining at different temperatures of the friction surfaces, the specific pressure between the friction surfaces, etc. can be determined.

5. REFERENCES

- [1] S.Simeonov, "Influence of the components of friction material linings structure on to the performances of friction clutch for heavy motor vehicles", PhD Thesis, Skopje 1999.
- [2] V.Mikarovska, "Laboratory simulations of operating modes of friction clutches for passenger motor vehicles" PhD. Thesis, Skopje, 1995.
- [3] Michael Urbakh, Joseph Klafter, Delphine Gourdon & Jacob Israelachvili. The nonlinear nature of friction. Nature Publishing Group. June 2004, 10.1038/nature 02750
- [4] Ovidiu Bratcu, Constantin Spănu. Contributions to state concept definition for sliding tribosystems material characterisation. The annals of University "DUNĂREA DE JOS" of Galati fascicle VIII, Tribology. 2003 ISSN 1221-4590