



UNION OF ENGINEERS AND TEXTILE TECHNICIANS OF SERBIA

**UNION OF ENGINEERS AND TECHNICIANS OF SERBIA
FACULTY OF TECHNOLOGY AND METALLURGY IN BELGRADE
FACULTY OF TECHNOLOGY IN LESKOVAC**

**INTERNATIONAL SCIENTIFIC CONFERENCE
CONTEMPORARY TRENDS AND INNOVATIONS IN
THE TEXTILE INDUSTRY**

**NAUČNA KONFERENCIJA SA MEĐUNARODNIM UČEŠĆEM
SAVREMENI TRENDOVI I INOVACIJE U
TEKSTILNOJ INDUSTRIJI**

PROCEEDINGS

ZBORNIK RADOVA

**Editor:
Snežana Urošević**

**Belgrade, 18 th May, 2018
Union of Engineering and Techicans of Serbia
Dom inženjera "Nikola Tesla"**



UNION OF ENGINEERS AND TEXTILE TECHNICIANS OF SERBIA

UNION OF ENGINEERS AND TECHNICIANS OF SERBIA
FACULTY OF TECHNOLOGY AND METALLURGY IN BELGRADE
FACULTY OF TECHNOLOGY IN LESKOVAC

On the occasion of celebrating
150 years of the Union of Engineers and Technicians of Serbia
65 years of the Union of Engineers and Textile Technicians of Serbia
65 years of continual publishing of the *Tekstilna industrija* journal

INTERNATIONAL SCIENTIFIC CONFERENCE
CONTEMPORARY TRENDS AND INNOVATIONS IN
THE TEXTILE INDUSTRY

NAUČNA KONFERENCIJA SA MEĐUNARODNIM UČEŠĆEM
SAVREMENI TRENDOVI I INOVACIJE U
TEKSTILNOJ INDUSTRIJI

PROCEEDINGS


ZBORNİK RADOVA

EDITOR/UREDNIK:
Snežana Urošević

Belgrade, 18 th May, 2018
Union of Engineering and Technicians of Serbia
Dom inženjera „Nikola Tesla“



Conference is financially supported by The Ministry of Education,
Science and Technological Development of the Republic of Serbia





SCIENTIFIC COMMITTEE

Conference Contemporary Trends and Innovations in the Textile Industry

Prof. dr Snežana UROŠEVIĆ (Serbia) - president
Prof. dr Časlav LAČNJEVAC (Serbia) - vice president
Prof. dr Mirjana KOSTIĆ (Serbia) - vice president
Prof. dr Dušan TRAJKOVIĆ (Serbia) - vice president
Prof. dr Gordana KOKEZA (Serbia)
Prof. dr Božidar STAVRIĆ (Serbia)
Prof. dr Kovička ASANOVIĆ (Serbia)
Prof. dr Dragan ĐORĐEVIĆ (Serbia)
Prof. dr Jovan STEPANOVIĆ (Serbia)
Prof. dr Slobodan POKRAJAC (Serbia)
Prof. dr Nemanja KAŠIKOVIĆ (Serbia)
Doc. dr Ineta NEMEŠ (Serbia)
Dr Ana JELIĆ AKSENTIJEVIĆ (Serbia)
Dr Gordana ČOLOVIĆ (Serbia)
Dr Danijela PAUNOVIĆ (Serbia)
Dr Suzana ĐORĐEVIĆ (Serbia)
Dr Mirjana RELJIĆ (Serbia)
Prof. dr Goran DEMBOSKI (Macedonia)
Prof. dr Liliana INDRIE (Romania)
Prof. dr Magdalena TSVETANOVA PAVLOVA (Bulgaria)
Prof. dr Sabina GHERGHEL (Romania)
Prof. dr Dragana GRUJIĆ (Bosna i Hercegovina)
Prof. dr Stana KOVAČEVIĆ (Croatia)
Prof. dr Miloš SORAK (Bosnia and Herzegovina)
Prof. dr Bruno ZAVRŠNIK (Slovenia)
Prof. dr Obrad SPAIĆ (Bosnia and Herzegovina)
Prof. dr Vineta SREBRENKOSKA (Macedonia)
Prof. dr Zlatina KAZLAČEVA (Bulgaria)
Prof. dr Zoran STJEPANOVIĆ (Slovenia)
Prof. dr Isak KARABEGOVIĆ (Bosnia and Herzegovina)
Prof. dr Svjetlana JANJIĆ (Bosnia and Herzegovina)
Prof. dr Damjana CELCAR (Slovenia)
Prof. dr Nuno BELINO (Portugal)
Prof. dr Victoria VLASENKO (Ukraine)
Dr Emilia VASILEANU (Romania)
Dr Roshan PAUL (India)
Mr Almina, DURAKOVIĆ (Slovenia)
Mr Sanja RISTESKI (Macedonia)

ORGANIZING COMMITTEE

Conference Contemporary Trends and Innovations in the Textile Industry

Prof. dr Snežana UROŠEVIĆ - president
Prof. dr Dragan ĐORĐEVIĆ - vice president
Dr Gordana ČOLOVIĆ - vice president
Dr Danijela PAUNOVIĆ
Dr Ana AKSENTIJEVIĆ JELIĆ
Stanko KIŠ dip. ing
M.Sc Bojana PEJČIĆ
M.Sc Mina PAUNOVIĆ
M.Sc Andrea DOBROSAVLJEVIĆ
Igor UROŠEVIĆ



Conference is financially supported by The Ministry of Education,
Science and Technological Development of the Republic of Serbia



PREFACE

The international conference Contemporary Trends and Innovations in the Textile Industry is coorganized by the Union of Engineers and Textile Technicians of Serbia, the Union of Engineers and Technicians of Serbia, the Faculty of Technology and Metallurgy in Belgrade, the University of Belgrade and the Faculty of Technology in Leskovac, University of Niš. The Conference is being organized on the occasion of celebrating 150 years of the Union of Engineers and Technicians of Serbia, 65 years of the Union of Engineers and Textile Technicians of Serbia and 65 years of continual publishing of the Textile Industry journal.

The Ministry of Education, Science and Technological Development of the Republic of Serbia recognized the importance of this Conference, and thus, supported it.

The aim of this Conference is to consider current technical, technological, economic, ecological, R&D, legal and other issues related to the textile industry, then the application of contemporary achievements and the introduction of technical and technological innovations in the production process of fiber, textile, clothing and technical textile by applying scientific solutions in order to improve the business and increase the competitive advantages of the textile industry on the domestic and global market.

Leading scientists and experts from the Balkans and other countries, working at faculties, textile colleges and institutes, but also individuals who professionally deal with the issues at hand are taking part in this Conference.

The Conference program involves papers dedicated to the scientific and practical aspects of the following topics: Textile and Textile Technology, Textile Design, Management and Marketing in the Textile Industry and Ecology and Sustainable Development in the Textile Industry. The Conference program includes 45 papers, and a total of 105 participants from 13 countries: Bosnia and Herzegovina, Bulgaria, Croatia, India, Italy, Macedonia, Portugal, Romania, Serbia, Slovenia, Turkey, Ukraine and Spain. Therefore, this Conference is an opportunity for establishing scientific, educational and economic cooperation of our country with other countries. Certain number of papers by domestic authors present the project results dealing with fundamental research and technological development, financed by the Ministry of Education, Science and Technological Development of the Republic of Serbia.

I would like to thank all those who have made it possible to organize the conference Contemporary Trends and Innovations in the Textile Industry and make it a success. First, I would like to thank the Scientific and Organizing Committee for working hard, spending countless hours and finding the best solutions for numerous organizational aspects of our Conference. Also, I would like to express my gratitude to all sponsors who believed in the importance of this Conference and cofinanced it. I also thank all the other institutions that supported the Conference in various ways, because without their support, the Conference could not have been organized. Last but not least, I would like to thank plenary lecturers, all authors and co-authors and guests for their participation in the Conference.

On behalf of the Organizing Committee
Prof. dr Snežana Urošević, president



Conference is financially supported by The Ministry of Education,
Science and Technological Development of the Republic of Serbia



UNION OF ENGINEERS AND TEXTILE TECHNICIANS OF SERBIA

COORGANIZERS



SPONSORS



CiS

DONORS



FRIENDS



Conference is financially supported by The Ministry of Education, Science and Technological Development of the Republic of Serbia



TABLE OF CONTENTS

PLENARY LECTURES

Gordana Kokeza, Snežana Urošević	1
ULOGA TEKSTILNE INDUSTRIJE U PROCESU REIDUSTRIJALIZACIJE PRIVREDE SRBIJE	
Mirjana Kostić, Biljana Pejić, Jovana Milanović, Ana Kramar	11
TRENDVI U PROIZVODNJI I PRIMENI CELULOZNIH VLAKANA	
Dušan Trajković, Jovan Stepanović	18
NETKANI GEOTEKSTILNI MATERIJALI OD POLIESTARSKIH I POLIPROPILENSKIH VLAKANA	
Nuno Belino	31
MEDICAL TEXTILES - A NEW SYSTEMATIC APPROACH	
Dragiša Stanjukić, Darjan Karabašević, Mladen Maksimović	55
THE APPLICATION OF INFORMATION AND COMMUNICATION TECHNOLOGIES IN THE TEXTILE INDUSTRY	

CONFERENCE PAPERS

SESSION I

Victoria Vlasenko, Svitlana Arabuli	63
DEVELOPMENT OF POLYANILINE MODIFIED TEXTILES AS UV RADIATION SHIELD	
Aleksandra Ivanovska, Mirjana Kostic, Koviljka Asanovic, Dragana Cerovic	71
THE INFLUENCE OF CHEMICAL MODIFICATIONS ON THE CHEMICAL COMPOSITION, SORPTION PROPERTIES AND VOLUME ELECTRICAL RESISTIVITY OF JUTE FABRICS	
Nuray Er Bıyıklı, Zeynep Güngör	80
DIGITIZED CLOTHING FASHION IN INDUSTRY 4.0	
Andreja Rudolf, Ion Razvan Radulescu, Paolo Ghezzi, Mirela Blaga, Luis Almeida, Zoran Stjepanović	91
ERASMUS+PROJECT MATRIX OF KNOWLEDGE FOR INNOVATION AND COMPETITIVENESS IN TEXTILE COMPANIES (TEXMATRIX): BENCHMARKING STUDY	
Verica Stojanović-Trivić, Svjetlana Janjić, Miloš Sorak, Dragana Grujić, Miroslav Dragić	99
UTICAJ EKO-OZNAKE OBUĆE NA KONKURENTNE PREDNOSTI INDUSTRIJE OBUĆE U REPUBLICI SRPSKOJ	
Isak Karabegović	105
IMPLEMENTACIJA INOVATIVNIH TEHNOLOGIJA U TEKSTILNOJ I ODJEVNOJ INDUSTRIJI	
Damjana Celcar	114
DEVELOPING SUSTAINABLE MATERIAL FROM KOMBUCHA CULTURE AND SWEETENED TEA	





Nuno José Ramos Belino, C.I.C. Santos, A.R. Santos, J.M.L. Rodilla, Roshan Paul 124

FUNCTIONALIZED SUSTAINABLE CLOTHING

Nenad Ćirković, Tatjana Šarac, Čedomir Dimić, Nataša Radmanovac, Jovan Stepanović 138

PROMENA UGLA OPORAVKA TKANINA KOD OTPORNOSTI NA GUŽVANJE TOKOM VREMENA RELAKSACIJE

Milada Novaković, Gordana Popović, Snežana Stanković 146

PROPUSTLJIVOST VAZDUHA TEKSTILNIH MATERIJALA NA BAZI KONOPLJE

Nemanja Kašiković, Gojko Vladić, Mladen Stančić, Rastko Milošević, Ivana Jurić, Saša Petrović, Dragoljub Novaković 154

DIGITALNA ŠTAMPA NA TEKSTILU – PROŠLOST, SADAŠNJOST, BUDUĆNOST

Dragan Đorđević, Snežana Urošević, Suzana Đorđević 161

PONAŠANJE TEKSTILA U PRISUSTVU ULTRAZVUČNIH TALASA

Nuno José Ramos Belino, André Vicente Tavares da Silva, Roshan Paul 170

DEVELOPMENT OF A NEW PERSONAL PROTECTIVE EQUIPMENT (PPE) FOR THE PROFESSIONAL COOKING STAFF THROUGH FUNCTIONAL DESIGN

CONFERENCE PAPERS

SESSION II

Ineta Nemeša, Jasmina Miolski 185

ZAVRŠNA OBRADA DENIM ODEĆE LASEROM

Tatjana Šarac, Nenad Ćirković, Sandra Stojanović, Dušan Trajković, Nataša Radmanovac 196

ISPITIVANJE TRANSPORTA VODENE PARE KROZ PLETENINE NAMENJENE ZA IZRADU SPORTSKE ODEĆE

Dragan Đorđević, Suzana Đorđević, Miodrag Šmercerović 205

PRIMENA SOL-GEL POSTUPKA U DORADI TEKSTILA

Kosana Vićentijević, Zoran Petrović 213

LEAN RAČUNOVODSTVO U LEAN POSLOVNIM PROCESIMA U TEKSTILNOJ INDUSTRIJI

Milovan Vuković, Nada Štrbac 220

INDUSTRIJA TEKSTILA I ODEĆE I POTROŠNJA U SKLADU SA ODRŽIVOŠĆU

Paunović Mina, Borić Slađana, Đalić Nataša, Bakator Mihalj 226

LIDERSTVO I INOVACIJE U RAZVOJU ODEVNIH PROIZVODA

Dragan Dimitrijević, Snežana Urošević, Obrad Spaić, Živoslav Adamović, Željko Đurić 232

UTICAJ CELOŽIVOTNE KONTINUIRANE EDUKACIJE STRUČNOG KADRA NA MODERNIZACIJU I AUTOMATIZACIJU MALIH I SREDNJIH PREDUZEĆA ODEVNE INDUSTRIJE



Conference is financially supported by The Ministry of Education, Science and Technological Development of the Republic of Serbia



Ana Aksentijević-Jelić ATHLEISUREWEAR - ODGOVOR NA DINAMIČNO MODNO TRŽIŠTE I EMPATIJSKI DIZAN	246
Andrea Dobrosavljević, Snežana Urošević BENČMARKING PROIZVODA TEKSTILNE INDUSTRIJE NA OSNOVU KARAKTERISTIKA VAŽNIH ZA ZADOVOLJENJE POTREBA POTROŠAČA I PRIORITIZACIJA BRENDA	254
Olga Stojanović, Mina Paunović PREDNOSTI I NEDOSTACI JIT KONCEPCIJE U USLOVIMA DOMAĆE ODEVNE INDUSTRIJE	266
Pihler Dušanka KULTURNA APROPRIJACIJA NA SAVREMENOJ MODNOJ SCENI	273
Zoran Ilić POVEZANOST TEKSTILNOG GRADA MANČESTERA U ENGLESKOJ I GRADA LESKOVCA - „SRPSKOG MANČESTERA“	279
Paunović Danijela 3D TEHNOLOGIJA KAO IMPERATIV U RAZVOJU PROIZVODA MODNE INDUSTRIJE	287
Čolović Gordana ZNAČAJ ERGONOMSKOG RADNOG MESTA U ODEVNOJ INDUSTRIJI	293
CONFERENCE PAPERS SESSION III	
Goran Demboski, Maja Jankoska COMPARISON OF APPAREL MANUFACTURING LINE BALANCING TECHNIQUES	299
Silvana Zhezhova, Sanja Risteski, Elvira Ristova, Svetlana Risteska, Vineta Srebrenkoska MECHANICAL CHARACTERIZATION OF GLASS FABRIC / EPOXY COMPOSITES	309
Stana Kovačević, Suzana Đorđević, Dragan Đorđević MODIFICIRANI PRIRODNI ŠKROB U FUNKCIJI ŠKROBLJENJA S I BEZ PREDNAMAKANJA PREĐE	315
Bruno Završnik BRZA MODNA ODEĆA U TRGOVINI NA MALO	328
Bruno Završnik PONAŠANJE POTROŠAČA PREMA MODNIM BRENDOVIMA ODEĆE	332
Damir Ilić, Tatjana Ilić-Kosanović, Vladimir Tomašević ULOGA INŽENJERINGA U STVARANJU MASKIRNE UNIFORME PRIPADNIKA VOJSKE SRBIJE U 21 VEKU	338
Liliana Indrie, Pablo Diaz Garcia, Sabina Gherghel DEVELOPMENT OF JACQUARD WOVEN FABRICS FOR HOME DECOR	348
Zlatina Kazlacheva, Julieta Ilieva AN INVESTIGATION OF DESIGN OF COMBINED 3D ELEMENTS IN LADIES' CLOTHING	352





Ivana Mladenović-Ranisavljević, Violeta Stefanović	358
UPRAVLJANJE LJUDSKIM RESURSIMA U TEKSTILNOJ INDUSTRIJI NA PODRUČJU JUŽNE SRBIJE	
Gojko Vladić, Gordana Delić, Nemanja Kašiković, Bojan Banjanin, Ivan Pinđer, Sandra Dedijer	366
PERCEPCIJA REVIJALNOG MODNOG OGLASA, UTICAJ KONVENCIONALNE LEPOTE MODELA	
Sabina Gherghel, Liliana Indrie	373
THEORETICAL STUDY ON THE RISK ASSESSMENT IN THE ACTIVITY OF THE TEXTILE PROFESSIONAL COMPANIES	
Slađana Antić, Ana Ilić, Aleksandra Mičić	378
IZRADA ALTERNATIVNIH VELIČINA ODEĆE CAD SISTEMOM	
Nebojša Ristić, Ivanka Ristić, Aleksandar Zdravković, Aleksandra Mičić	385
DORADA PAMUČNIH TKANINA KOMBINACIJOM REAKTIVNE SMOLE I HITOZANA	
Autor index	i
Sponsors, donors and friends of the conference	v



**Conference is financially supported by The Ministry of Education,
Science and Technological Development of the Republic of Serbia**



MECHANICAL CHARACTERIZATION OF GLASS FABRIC/EPOXY COMPOSITES

Silvana Zhezhova¹, Sanja Risteski¹, Elvira Ristova¹, Vineta Srebrenkoska¹,
Svetlana Risteska²

¹ Faculty of Technology, "Goce Delcev" University, Shtip, Macedonia

² Institute of Advanced Composites and Robotics,
Macedonia

ABSTRACT: Textile composite materials present a class of advanced materials reinforced with textile preforms used for primary structural applications. Using the unique combination of light weight, elasticity, strength and toughness, the textile structures have long been recognized as an attractive reinforcement component for production of different types of composite materials for various applications. The aim of this study is to investigate the influence of different types of two - dimensional textile structure as a reinforcing component on mechanical properties of composite materials. For that purpose, E-glass fabric/epoxy resin prepress have been fabricated by using the hand lay-up technique and used in the production of laminated composite samples with help of compression technology. Flexural properties of manufactured samples were determined with help of three-point bending test in accordance with the procedure described in the standard EN ISO 14125. Comparison between results of specimens manufactured at same technological parameters, but from textile fabric with different weave pattern shown that all samples tested at MD direction had performed better flexural properties in comparison to the samples tested at CD direction.

Keywords: E- glass fabric, epoxy resin, prepreg, flexural properties

MEHANIČKA KARAKTERIZACIJA KOMPOZITA NA BAZI STAKLENIH TKANINA/EPOKSIDNIH SMOLA

APSTRAKT: Tekstilni kompozitni materijali predstavljaju klasu naprednih materijala ojačani tekstilnim predformama namenjeni za primarnu strukturnu primenu. Koristeći jedinstvenu kombinaciju male težine, elastičnosti, čvrstoće i žilavosti, tekstilne strukture odavno su prepoznate kao atraktivna komponenta za ojačanje priikom proizvodnju različitih vrsta kompozitnih materijala. Cilj ove studije je istraživanje uticaja različitih tipova dvodimenzionalne tekstilne strukture kao ojačivač mehaničkih osobina kompozitnih materijala. U tu svrhu proizvedeni su preimpregnirani materijali, E-staklena tkanina/epoksidna smola tehnikom ručnog polaganja i dalje su korišteni u proizvodnji laminiranih kompozitnih uzoraka uz pomoć tehnologije kompresije. Fleksibilna svojstva proizvedenih uzoraka određena su pomoću testa savijanja u tri tačke u skladu s postupkom opisanom u standardu EN ISO 14125. Upoređivanje rezultata ispitivanja uzoraka proizvedenih prema istim tehnološkim parametrima, ali od



tkanina različitih prepletaja pokazalo je da svi uzorci koji su testirani u smeru MD imaju bolje osobine savitljivosti u poređenju sa uzorcima koji su testirani u pravcu CD-a.

Ključne reči: E-staklena tkanina, epoksidna smola, prepreg, fleksibilna svojstva

1. INTRODUCTION

Composite materials reinforced with textile preforms are called textile composites [1]. Textile composites proved to be competitive materials because they possess outstanding physical, mechanical and thermal properties, particularly light weight, high strength and stiffness, good fatigue resistance, excellent corrosion resistance and dimensional stability [2].

Textile preforms are fibrous structures with a predetermined fiber orientation, preshaped and often pre-impregnated with matrix intended for the production of composite materials. The microstructure of the fibers within the preform or the structural characteristics of the fibers determine the geometry and distribution of the pore within the composite material. Textile preforms do not only play a key role in the transformation of fiber properties into complex composite performance, but also affect the easy or difficult infiltration of matrix and consolidation [3]. The primary functions of the textile preforms in the composite are to improve its mechanical properties while the matrix transfers the stresses between the fibers and protects them from mechanical and environmental damage. The types of textile preforms are subject of interest to a large number of authors.

In general, the classification of textile structural preforms should reflect the macro geometry, the method of manufacture of textile structure and structural micro geometry. The micro geometry includes the direction of the reinforcement, the linearity of the reinforcement in each direction, the continuity of the reinforcement component, the linear density of the fiber, the number of yarns in each direction (warp and weft) [4, 5]. From the aspect of the structure of the textile materials and their specific geometry [3], textile preforms can be classified into 3 levels: one-dimensional (non-axial – roving yarns), two-dimensional (one-axial – chopped strand mats; non-axial – sheets; biaxial – plain weave; three-axial – three-axial weave; multi-axial) and three-dimensional (linear element – 3D solid braiding, multiple weave, three-axial and multi-axial 3D weave; plane element – laminates, honeycombs and beams) [2, 6]. The structural characteristics of textile material have a significant impact on the physical and mechanical properties of the fabrics and their performance in the final composite. Often they are determined from the yarns of which they are made, as well as from the process parameters of the weaving machines. The basic structural characteristics of the fabrics include: the material composition of the fabric, the linear density of yarns used for warp and weft, the density of the fabric in warp and weft direction, the way of interlacing the weft and warp yarns (style or weave pattern), etc.. The most commonly used types of weave patterns are: plain, basket, twill, and satin [7].

The development of textile composite, their design and manufacturing technologies is one of the most important achievements in the engineering of materials [8]. When combined with high performance fibers, matrices and properly fitted fiber / matrix interfaces, the creative use of textile preforms significantly expand the options for



designing advanced composite materials for different applications. The outstanding achievements in the field of computer-aided design and manufacturing have facilitated the adaptation of many traditional textile processes to create 2-D and 3-D textile structures at relatively low production costs. Considering the critical role which the textile preform have in the production and performances of the composite materials, the interest in the subject of textile composites has been greatly increased.

Textile composites are widely used in the aerospace industry, automotive industry railway, marine, commercial mechanical engineering applications, like machine components, mechanical components, civil buildings, protective and sport equipment etc.

2. EXPERIMENTAL TEST

In this study are used (prepregs) pre-impregnated composite materials, which were produced by using the hand lay-up technique. For the production of prepreg materials two different types of two-dimensional E-glass fabric were used. In these experimental test as a matrix, a two-component thermosetting system of epoxy resin (DER 3821) and a hardener ((Polypox H 766) was used. In table 1 and table 2 are presented the characteristics of used E-glass fabrics and epoxy resin.

For production of composite laminates ten piles of manufactured E glass fabric/ epoxy resin prepreg with dimensions 250 mm x 200 mm were used. The plies were stacked in press machine where final curing of the preforms was performed at compressive pressure of 30 bar and temperature of 70-80° C. The laminated samples stay in the press machine for one hour. For the first half hour of the process, the sample is at temperature of 70 °C, and the rest of the time the temperature rises to 80 °C. The prepared samples are left to stand for a few hours, while the mixture does not fully combine and dry out.

Flexural properties of manufactured samples were determined with help of three-point bending test in accordance with the procedure described in the standard EN ISO 14125 [9]. For that purpose computer controlled universal testing machine (UTM) Hydraulic press, SCHENCK- Hidrauls PSB with maximal load of 250 kN, constant crosshead speed of 5 mm/min and span-to-depth ratio of 16:1 was used. The standard dimensions of the tested samples according to EN ISO 14125 are 15 x 60 x the sample thickness (mm). With help of machine five rectangular forms in a machine direction MD and five rectangular forms in CD direction (contrary to the direction of the machine) were cut from finished composite laminates. Dimensions and thickness of each specimens were measured with a help of micrometer instrument. In this way prepared composite specimens were tested for flexural strength using a universal testing machine (UTM), which is illustrated in Figure 1. Load and displacement were recorded by an automatic data acquisition system for each sample. Minimum five reproducible tests were conducted for each sample at room temperature.

3. RESULTS AND DISCUSSION

The results of the testing method of the laminated specimens for determination of the flexural properties are presented in Table 3. The load at which completed fracture of the specimen occurred has been accepted as breakage load. Load-displacement curves were plotted for every tested sample and values for stress, strain and module of elasticity were



calculated as an average value. The flexural stress σ_f was determined by the equation (1), where, σ_f is the flexural stress in Megapascals (MPa); F is the load in Newtons (N), L is the span, in millimeters (mm), b is the width of the specimen, in millimeters (mm), and h is the thickness of the specimen in millimeters (mm).

The flexural modulus of elasticity describes the dependence between stress, σ_f and deformation, ε_f . Flexural modulus of elasticity (E_f) and flexural strain (ε_f) of the composite specimens were determined using equations (2) and (3). Where, E_f is the flexural modulus of elasticity, expressed in Megapascals (MPa), ΔS is the difference in deflection between S'' and s' , ΔF is the difference in the load F'' and load F' at s'' and s' respectively, and s is maximum deflection of the center of the specimen (mm).

Obtained results from performed tests on laminated composite samples (Table 3) shown maximal flexural strength of 492,813 MPa for sample II-1 and minimal flexural strength of 370,128 MPa for sample I-2. Comparison between results of specimens manufactured at same technological parameters, but from textile fabric with different weave pattern shown that all samples tested at MD direction had performed better flexural properties in comparison to the samples tested at CD direction. The laminated samples manufactured from the second E-glass fabric with twill weave structure shown bigger values for flexural strength in both direction in relation to laminated samples produced from E-glass fabric with plain weave structure.

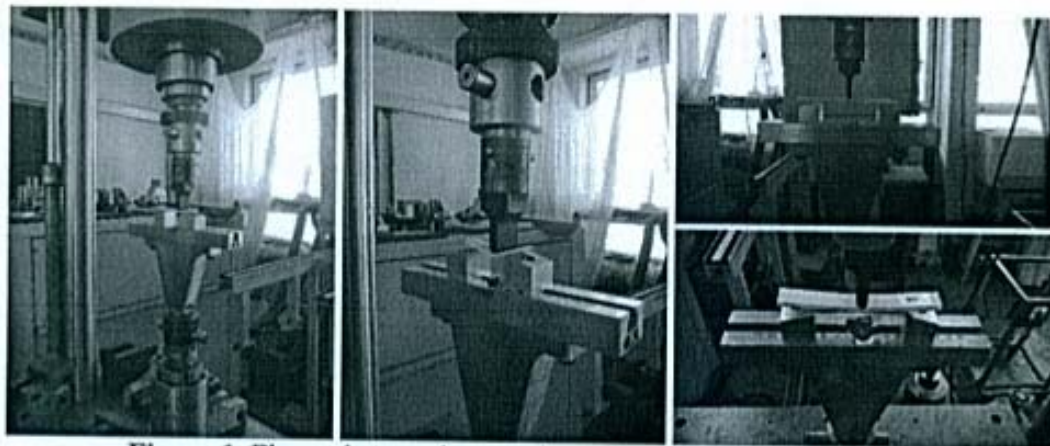


Figure 1. Flexural strength test using a three-point flexural method

Table 1. Characteristics of E- glass fabrics (sample 1 and 2)

Characteristic	Sample 1	Sample 2
Type of weave	Plain	Twill 2x2
Density (g/m ²)	300	325±15
Thickness (mm)	0,3	0,32±0,05
Width (cm)	2000	92
Count warp (ends/cm)	8±1	90±1
Count weft (ends/cm)	7±1	50±1
Strength warp (N/25mm)	≥2000	3920
Strength weft (N/25mm)	≥1800	980



Table 2. Characteristics of the components of the resin system

Epoxy resin (D.E.R 3821)		Polypox H 766	
Epoxide Equiv. Weight (g/eq)	176 – 183	Density at 25°C, [g/cm ³]	0,94±0,05
Epoxide Percentage (%)	23,5 – 24,4	Viscosity at 25°C, [mPa s]	14
Epoxide Group Content (mmol/kg)	5460 – 5680	Amine number [mg KOH/g]	540±15
Color (Platinum Cobalt)	125 Max.	H – equivalent weight [g/Equiv.]	55
Viscosity @ 25°C (mPa*s)	9000 – 10500	Colour (Gardner)	blue
Hydrolyzable Chlorine Cont. (ppm)	500 Max.		
Water Content (ppm)	700 Max.		
Density @ 25°C (g/ml)	1,16		
Epichlorohydrin Content (ppm)	5 Max.		
Shelf Life (Months)	24		

Table 3. Results from flexural testing of the laminated specimens

Sample Number	b (mm)	h (mm)	\bar{L} (mm)	Fmax (N)	S (mm)	σ_f (MPa)	E_f (GPa)	ϵ_f (%)	
I-1 MD	1-1	15,33	2,25	5,66	636,29	5,66	491,925	23,035	4,776
	1-2	15,20	2,27	4,31	625,61	4,31	479,247	24,266	3,669
	1-3	15,40	2,25	3,78	659,18	3,78	507,305	21,741	3,189
	1-4	15,39	2,25	4,43	600,43	4,43	462,394	18,617	3,738
	1-5	15,00	2,25	2,89	592,04	2,89	467,785	19,052	2,438
				622,71		481,731	21,342	3,562	
I-2 CD	2-1	15,27	2,34	4,70	508,12	4,70	364,625	15,944	4,124
	2-2	15,30	2,32	4,06	490,57	4,06	357,425	15,226	3,532
	2-3	15,27	2,33	3,80	485,23	3,80	351,195	16,287	3,320
	2-4	15,29	2,35	3,43	570,67	3,43	405,502	17,948	3,023
	2-5	15,34	2,37	4,55	534,06	4,55	371,894	16,653	4,044
				517,73		370,128	16,412	3,609	
II-1 MD	1-1	15,46	2,63	60,43	887,29	3,41	497,847	19,454	3,363
	1-2	15,35	2,68	60,40	944,51	2,96	514,020	18,744	2,975
	1-3	15,42	2,60	60,13	903,32	3,41	519,950	19,899	3,325
	1-4	15,38	2,68	60,23	929,26	3,48	504,734	18,026	3,497
	1-5	15,45	2,85	60,48	894,16	3,27	427,512	16,408	3,495
				911,708		492,813	18,506	3,331	
II-2 CD	2-1	15,44	2,55	60,11	704,95	4,42	421,291	18,302	4,227
	2-2	15,33	2,58	60,09	729,37	4,06	428,862	20,143	3,928
	2-3	15,16	2,54	60,06	658,41	4,26	403,907	18,287	4,058
	2-4	15,28	2,58	60,47	779,72	4,44	459,968	19,505	4,296
	2-5	15,15	2,59	60,21	740,05	4,79	436,918	18,551	4,652
				722,50		430,189	18,958	4,232	



$$\sigma_f = \frac{3FL}{2bh^2} \quad (1)$$

$$E_f = \frac{L}{4bh^3} \left(\frac{\Delta F}{\Delta \delta} \right) \quad (2)$$

$$\varepsilon_f = \frac{6\delta h}{L^2} \quad (3)$$

4. CONCLUSION

From the obtained result for flexural properties of laminated E- glass fabric/ epoxy resin composite samples can be concluded, that flexural strength and flexural modulus of elasticity increase in MD direction in comparison to CD direction. This is because in MD direction (warp) the textile structure usually have bigger number of yarns than in CD direction (weft). Also, yarns used for warp have better mechanical properties than yarns used for weft. The way of interlacing of warp and weft yarns (style of weave pattern) also has a direct influence on the mechanical properties of laminated composite samples. Depending on the requirements of the laminate, many weave configurations can be used. Wide choice of matrices and textile preforms give good opportunities to choose an appropriate combination for a given application.

REFERENCES

- [1] Reber, R. (1999). Micro-and macromechanical properties of knitted fabric reinforced composites (KFRCS) with regard to environmental exposure. Swiss federal institute of technology, Zurich.
- [2] Zănoagă, M., & Tanasă, F. (2014). Complex textile structures as reinforcement for advanced composite materials. International conference of scientific paper, Brasov, 2008, International conference of scientific paper Afases, Brasov, 22-24 May 2014.
- [3] Ko, F. K. (1993). Advanced Textile Structural Composites, Advanced Topics in Materials Science and Engineering, Springer, Boston.
- [4] Ko, F. K., & Du, G. W. (1998). Handbook of Composites, Chapman and Hall, London.
- [5] Axinte, A., Țaranu, N., & Bejan, L. (2016). Modelling patterns for fabric reinforced composites. Buletinul institutului politehnic din iași.
- [6] Fukuta, K., Onooka, R., Aoki, E. N. (1984). 3D fabrics for composites. S.Kawabata, 15th Textile Research Symposium. Osaka: The Textile Machinery Society of Japan, pp. 36-38.
- [7] Wallenberger, F. T., Watson, J. C., Li, H., PPG Industries, I. (2001). Glass Fibers, ASM Handbook, Vol. 21:Composites.
- [8] Dehury, J. (2013). Processing & characterization of jute/glass fiber reinforced epoxy based hybrid composites, Department of Mechanical Engineering National Institute of Technology Rourkela.
- [9] ENISO14125. (1998). EN ISO 14125 Fibre-reinforced plastic composites, Determination of flexural properties. European Committee for Standardization.