In print: ISSN 0352-1206 On line: ISSN 1857-8586

Geologica Macedonica

Journal of the Geological Institute at the Faculty of Natural and Technical Sciences, University "Goce Delčev"-Štip, R. Macedonia



Geologica Macedonica	Vol.	27	No	2	pp.	05 106	Štip	2022
Geologica Macedonica	Год.	3/	Број	2	стр.	95–186	Штип	2023

UDC 55 CODEN – GEOME 2

GEOLOGICA MACEDONICA

In print: ISSN 0352-1206

On line: ISSN 1857-8586

Geologica Macedonica	Vol.		No		pp.		Štip	
		37		2		95–186	-	2023
Geologica Macedonica	Год.		Број	_	стр.	70 100	Штип	2028

Geologica Macedonica	Vol.		No		pp.		Štip	
		37		2		95–186		2023
Geologica Macedonica	Год.		Број	_	стр.	70 100	Штип	2020

GEOLOGICA MACEDONICA

Published by: Издава:

"Goce Delčev" University in Štip, Faculty of Natural and Technical Sciences, Štip, North Macedonia Универзитет "Гоце Делчев" во Штип, Факултет за природни и технички науки, Штип, Северна Македонија

EDITORIAL BOARD

Todor Serafimovski, Editor in Chief (N. Macedonia), Blažo Boev, Editor (N. Macedonia), David Alderton (UK), Tadej Dolenec (Slovenia), Ivan Zagorchev (Bulgaria), Wolfgang Todt (Germany), Nikolay S. Bortnikov (Russia), Clark Burchfiel (USA), Thierry Augé (France), Todor Delipetrov (N. Macedonia), Milorad Jovanovski (N. Macedonia), Spomenko Mihajlović (Serbia), Dragan Milovanović (Serbia), Dejan Prelević (Germany), Albrecht von Quadt (Switzerland), Sabina Strmić-Palinkaš (Norway).

УРЕДУВАЧКИ ОДБОР

Тодор Серафимовски, главен уредник (С. Македонија), Блажо Боев, уредник (С. Македонија), Дејвид Олдертон (В. Британија), Тадеј Доленец (Словенија), Иван Загорчев (Бугарија), Волфганг Тод (Германија), Николај С. Бортников (Русија), Кларк Барчфил (САД), Тиери Оже (Франција), Тодор Делипетров (С. Македонија), Милорад Јовановски (С. Македонија), Споменко Михајловиќ (Србија), Драган Миловановиќ (Србија), Дејан Прелевиќ (Германија), Албрехт фон Квад (Швајцарија), Сабина Стрмиќ-Палинкаш (Норвешка)

Technical editor Технички уредник Вlagoja Bogatinoski Благоја Богатиноски

Proof-reader Коректор

Alena Georgievska Алена Георгиевска

Address Адреса

GEOLOGICA MACEDONICA EDITORIAL BOARD РЕДАКЦИЈА

Faculty of Natural and Technical Sciences Факултет за природни и технички науки

Р. О. Вох 96 пошт. фах 96

MK-2000 Štip, North Macedonia МК-2000 Штип, Северна Македонија

Tel. ++ 389 032 550 575 Тел. 032 550 575

E-mail: todor.serafimovski@ugd.edu.mk

400 copies Тираж: 400

Published twice yearly Излегува два пати годишно

Printed by: Печати:

2^{ri} Avgust – Štip 2^{pu} Август – Штип

Ргісе: 10 € Цена: 600 ден.

This issue is published in December 2023 Бројот е отпечатен во декември 2023

Geologica Macedonica	Vol.		No		pp.		Štip	
		37		2.		95–186	•	2023
Geologica Macedonica	Год.		Број	_	стр.	75 100	Штип	2025

TABLE OF CONTENTS

399. Tourkia Tahri, Souad Narsis, Zahia Chafi Souici, Nacer Bezzi, Omar Sekiou, Tabet Trirat, Theziri Amrane, Aissa Benselhoub, Stefano Bellucci	
MINERALOGICAL AND CHEMICAL CHARACTERISTICS OF PHOSPHATES	
FROM THE DJEBEL ONK DEPOSITS	99–109
400. Tena Šijakova-Ivanova, Ivan Boev	
HYDROTHERMAL HALITE IN THE Pb-Zn MINERAL ASSOCIATION	
OF THE SASA DEPOSIT (NORTH MACEDONIA)	111–118
401. Igor Ivanovski, Nataša Nedelkovska, Goše Petrov, Milorad Jovanovski, Toni Nikolovski	
COMPARISON BETWEEN TRADITIONAL AND CONTEMPORARY METHODS	
FOR DATA RECORDING IN STRUCTURAL GEOLOGY	119–133
402. Trajče Stafilov, Robert Šajn, Danica Božinova	
SPATIAL DISTRIBUTION OF CHEMICAL ELEMENTS IN SOILS	
FROM THE SOUTHEASTERN PART OF NORTH MACEDONIA	
(GEVGELIJA, VALANDOVO, BOGDANCI AND DOJRAN MUNICIPALITIES)	135–152
403. Marjan Delipetrev, Blagica Doneva, Ćorgi Dimov, Leonora Mitreva, Hristina Krstova	
GEOMAGNETIC RESEARCHES IN THE EASTERN PART OF NORTH MACEDONIA	153–170
404. Goran Tasev, Dalibor Serafimovski, Blažo Boev, Lazar Ćorgiev, Todor Serafimovski	
RADON AND RADIUM CONCENTRATION IN WATER FROM PUBLIC FOUNTAINS	
AT THE CENTRAL PARTS OF THE KRATOVO-ZLETOVO VOLCANIC AREA,	151 101
REPUBLIC OF NORTH MACEDONIA	171–184
INSTRUCTIONS TO AUTHORS	185–186

Geologica Macedonica	Vol.	37	No	2	pp.	05 186	Štip	2023
Geologica Macedonica	Год.	31	Броі	_	стр.	93-100	Штип	2023

СОДРЖИНА

399. Tourkia Tahri, Souad Narsis, Zahia Chafi Souici, Nacer Bezzi, Omar Sekiou, Tabet Trirat, Theziri Amrane, Aissa Benselhoub, Stefano Bellucci	
МИНЕРАЛОШКИ И ХЕМИСКИ КАРАКТЕРИСТИКИ НА НАОЃАЛИШТАТА НА ФОСФАТИ ОД ЏЕБЕЛ ОНК	00 100
ПА ФОСФАТИ ОД ЏЕВЕЛ ОПК	
400. Тена Шијакова-Иванова, Иван Боев	
ПОЈАВА НА ХИДРОТЕРМАЛЕН ХАЛИТ ВО МИНЕРАЛНАТА АСОЦИЈАЦИЈА	
НА Рb-Zn ВО НАОЃАЛИШТЕТО САСА (СЕВЕРНА МАКЕДОНИЈА)	111–118
401. Игор Ивановски, Наташа Неделковска, Гоше Петров, Милорад Јовановски, Тони Николовски	
ТРАДИЦИОНАЛНИ И СОВРЕМЕНИ МЕТОДИ ЗА ЕВИДЕНЦИЈА НА ПОДАТОЦИ	1
ВО СТРУКТУРНАТА ГЕОЛОГИЈА	
402. Трајче Стафилов, Роберт Шајн, Даница Божинова	
ПРОСТОРНА ДИСТРИБИУЦИЈА НА ХЕМИСКИ ЕЛЕМЕНТИ ВО ПОЧВИТЕ	
ОД ЈУГОИСТОЧНИОТ ДЕЛ НА СЕВЕРНА МАКЕДОНИЈА	
(ОПШТИНИТЕ ГЕВГЕЛИЈА, ВАЛАНДОВО, БОГДАНЦИ, ДОЈРАН)	135–152
403. Марјан Делипетрев, Благица Донева, Ѓорги Димов, Леонора Митрева,	
Христина Крстова	
ГЕОМАГНЕТНИ ИСТРАЖУВАЊА ВО ИСТОЧНИОТ ДЕЛ	152 170
НА РЕПУБЛИКА СЕВЕРНА МАКЕДОНИЈА	153–170
404. Горан Тасев, Далибор Серафимовски, Блажо Боев, Лазар Ѓоргиев,	
Тодор Серафимовски КОНЦЕНТРАЦИЈА НА РАДОН И РАДИУМ ВО ВОДА ОД ЈАВНИ ЧЕШМИ	
ВО ЦЕНТРАЛНИТЕ ДЕЛОВИ НА ВУЛКАНСКОТО ПОДРАЧЈЕ	
КРАТОВО-ЗЛЕТОВО, РЕПУБЛИКА СЕВЕРНА МАКЕДОНИЈА	171–184
УПАТСТВО ЗА АВТОРИТЕ	185–186

404 GEOME 2 Manuscript received: July 10, 2023 Accepted: Octomber 30, 2023 Geologica Macedonica, Vol. 37, No. 2, pp. 171–184 (2023)
On print ISSN 0352 – 1206
On line ISSN 1857 – 8586
UDC: 550.42:546.296]:628.112.034.4(497.723)
550.42:546.44]:628.112.034.4(497.723)
https://doi.org/10.46763/GEOL23372171t

Original scientific paper

RADON AND RADIUM CONCENTRATION IN WATER FROM PUBLIC FOUNTAINS AT THE CENTRAL PARTS OF THE KRATOVO-ZLETOVO VOLCANIC AREA, REPUBLIC OF NORTH MACEDONIA

Goran Tasev¹, Dalibor Serafimovski², Blažo Boev¹, Lazar Gorgiev¹, Todor Serafimovski¹

¹Faculty of Natural and Technical Sciences, "Goce Delčev" University in Štip, Blvd. "Goce Delčev" 89, P. O. Box 201, 2000 Štip, North Macedonia ²Faculty of Electrical Engineering, "Goce Delčev" University in Štip, "Krste Misirkov" 10-A, P, O. Box 201, 2000 Štip, North Macedonia goran.tasev@ugd.edu.mk

A b s t r a c t: The paper presents information about our latest study of radon and radium in drinking water from the public water fountains situated in central parts of the Kratovo-Zletovo volcanic area. Results for the radon in water measurements were as follows: Fountain 1 to Fountain 4 samples, ranged from 6.63 up to 157.73 Bq I^{-1} . Obtained results for the radium in water, Fountain 1 to Fountain 4 samples, ranged from 0.20 up to 1.08 Bq I^{-1} . Both, radon and radium measurements, in water samples from certain fountains have shown significantly higher values than the strictest standards given by the United States Environmental Protection Agency (USEPA) and World Health Organization (WHO). The committed effective doses for the population consuming the water directly from the fountains or as self-bottled waters from the Kratovo-Zletovo volcanic area were estimated using the concentration of $I^{22}R^{-1}R^{$

Key words: radon; radium; water; fountains; effective dose; Kratovo; Zletovo

INTRODUCTION

As already mentioned elsewhere radiation from a variety of sources (natural and anthropogenic) has always been a potential danger to humans (Ilani et al., 2006; Sannappa et al., 2006). The average world annual dose is about 2.4 μ Sv, so although it is inevitable, its control is necessary (UNSCEAR, 1993; WHO, 2011; WHO 2018).

It is an inevitable fact that surface and underground waters contain radionuclides as natural components in various concentrations depending on their origin (Tasev et al., 2022). The radionuclides are part of the terrestrial composition where they could be found in different concentrations (Di Carlo et al., 2019). The radioactive series ²³⁸U, ²³⁵U, and ²³²Th as well as their radionuclides are continuously present in the human body and contribute to internal radiation emitting alpha and beta particles. The major fraction of the internal dose received by humans from naturally occurring radionuclides can be easily attributed to radium (²²⁶Ra) and its daughter products, especially radon (²²²Rn). As a result of natural processes like decay and dissolution from the surro-

unding geological environment (rocks, soils) of its parent nuclide radium (226Ra) and consecutively radon (222Rn) are released into waters (Moreno et al., 2014; Fonollosa et al., 2016). Radon in water may originate from dissolution of airborne radon into water and other higher radon bearing water in-flows in the catchment area, too. It has long been known that many mineral springs contain significant concentrations of naturally occurring radionuclides (mostly radium and radon) in higher concentration (in the range of 200–300 Bq· l^{-1} ; Najeeb et al., 2014) than the usual drinking water (Moldovan et al., 2009). During the last decades, radon and radium concentration in ground water and its variability with time and space have been studied more intensively (Alshamsi et al., 2013; Eröss et al., 2015). Radium is known as more chemically active and it can easily be absorbed from the soil by plants and transported to the food chain to humans when it may affect the tissues (bone marrow that produces red blood cells) and can cause bone cancer, also. The radioactive gas radon, as a decay product of ²²⁶Ra, is very important from the point of view of health risk. ²²²Rn is an inert gas whose concentrations in ground water are reportedly related to a number of factors including its emission from surrounding rocks, temperature, pressure, rainfall and earthquake activities (Ilani et al., 2006; Sannappa et al., 2006). The alpha radiation emitted by radon and its progeny polonium is considered a significant health hazard by the United State Environmental Protection Agency because at elevated levels it causes lungs cancer (Lubin et al., 1995; UNSCEAR, 2006).

Due to fact that they have always been regarded as a voluptuary good, bottled mineral waters intended for human consumption until recently were excluded from national and international regulations. But being aware that in the recent years consumption of bottled mineral waters, without any doubts, has become very popular and even a significant segment of the population (due to a higher standard of living) drinks exclusively only mineral water as drinking water, approximately 1 l·d⁻¹ (Statista, 2016) arise an idea of their monitoring in regards to radon and radium. This is very similar to the average individual consumption of bottled mineral water is 0.36 l·d⁻¹ in Europe (Di Carlo et al,

2019). Population exposure to radon concentration in such waters is usually low because its half-life (3.8 days), which is much shorter than the typical time needed by bottled waters to reach consumers' houses. As a consequence, radon concentration measured in mineral bottled waters is usually lower or much lower than its above-mentioned parametric value (Kralik et al., 2003). Opposite to that scenario, in non-industrially bottled mineral waters, radon exposure can be not negligible when consumers fill bottles and containers directly from public fountains thus reducing significantly the time elapsing between mineral water bottling and subsequent consumption. As we all already know, water for human consumption should be free from chemical, microbiological, and radiological contamination (UNSC-EAR, 2000). It is a decades long tradition that inhabitants in rural settlements in the Republic of North Macedonia are self-bottling water for individual use from the public fountains. Those waters are believed to have positive effects to human's health due to an idea that they are located in industrially nonpolluted areas and should be free any substances harmful to humans health. However, scientific approach and analyses of such waters are quite scarce.

STUDY AREA

Public fountain waters radon and radium activity concentration measurements were carried out on 4 samples from the Kratovo-Zletovo volcanic area, Republic of North Macedonia. Water that was sampled is regularly used for direct human consumption. As it is already known elevated radon concentrations are often encountered in water coming from wells drilled in bedrocks, containing medium to high uranium content. Radon in drinking water supplies derived from drilled wells is entirely dependent on the geochemistry of the bedrock or sands and gravels into which the well is drilled and the recharge rate of the bedrock fractures or the sand and gravel aquifer. In that regard, here we are giving brief preview of the local geology.

Geological characteristics of the Kratovo-Zletovo area.

The Kratovo-Zletovo volcanic area, situated in the eastern part of the country, is the largest magmatic area in the Republic of North Macedonia, which occupies a surface of about 1200 km² (Serafimovski, 1993). Opposing opinions for its regional geotectonic position are published. Some of them locate the area in the Serbo-Macedonian massif (Ivanov,

1966), while others say that it is situated in the Vardar zone (Arsovski and Petkovski, 1975; Dimitrijević, 1974). The Kratovo-Zletovo volcanic area includes the ore region of the same name, which is of great interest from magmatic and metallogenic point of view. According to (Arsovski, 1997; Serafimovski, 1993) and other researchers the volcanic activity in the Kratovo-Zletovo area started at the end of the Eocene or in the Early Oligocene, and with some pauses lasted up to the Early Pliocene. During its active period, volcanic activity successively shifted from north-east to south-west direction (Boev and Yanev, 2001). The Kratovo-Zletovo region volcanism was generally controlled by deep sub-meridional dislocations, activated by Paleogene eastwest extension. Until the end of the Miocene, the volcanic activity was reestablished along longitudinal neotectonic dislocations, starting with younger north-south extension. Geomorphologically, in Kratovo-Zletovo area there are about 20 volcanic centres and calderas, highly eroded by post-volcanic denudation processes. The volcanic rocks in the Kratovo-Zletovo area belong to a large Eocene-Oligocene magmatic belt which can be traced from Serbia to the west and to Bulgaria and Turkey to the

east (Harkovska et al., 1989). The explosive magmatism generated abundant volcanic rocks (lavas and pyroclastic materials) and subvolcanic bodies of predominantly andesite, trachy-andesite, dacite, and rhyolite composition (Figure 1).

Numerous studies showed the calc-alkaline to shoshonitic character of the magmatism, and only few of them refer it to the tholeiitic series [Serafimovski, 1993]

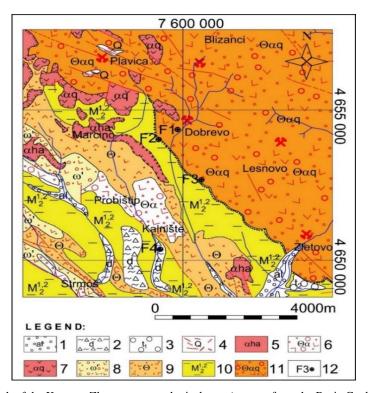


Fig. 1. Sketch of the Kratovo-Zletovo area geological map (excerpt from the Basic Geological Map of the Republic of North Macedonia; modified 2023)

Legend: Holocene: 1 - Alluvium, 2 - Deluvium, 3 - Lower river terrace; Pleistocene: 4 - Hydrothermal quartzites - silex, 5 - Horblenda - augite andesites, 6 - Ignimbrites of andesitic composition; Pliocene: 7 - Dacytoids, 8 - Andesitic breccias, 9 - Tuffs; Miocene: 10 - Marlstones, tuffaceous sandstones and claystones, 11 - Plated grey-green ignimbrites of dacite composition. 12 - F1-F4 fountain water sampling points

METHODOLOGY

Here we explain the water fountain sampling, measurement system and the process of radon and radium analysis.

Water sampling procedure. The radon concentration is evaluated at the point where the drinking water is put into bottles for two main reasons:

The radon concentration in samples collected directly at the public water fountains is higher than in any other scenario interesting the same source (Figure 2). Indeed, referring to bottled water, the radon concentration in water stored in containers for transport and subsequent consumption (after a certain period of time) decreases due to the natural radioactive decay of Rn and the leakage through the sealing of the bottles. Also, radon concentration in water is significantly reduced during the processes of bottling and packing in plant operations.

ii. Sampling the water directly consumed, in a matter of an hours elapsing between the collection and the first opening of the bottle and water consumption.

For our research water was collected in polyethylene terephthalate (PET) bottles due to fact that such a material has lower radon loss during storage (Leaney et al., 2006; Lucchetti et al., 2016) than some other usually practiced types of polyethylene (Jobbágy et al., 2017), which also are compliant with ISO 13164-1:2013 (ISO, 2013a) and ISO 13164-3:2013 (ISO, 2013b) principles to be practiced in water sampling and its storage, and transport (Figure 2).

For the drinking water public fountains of interest, four samplings were carried out in the socalled typical way (Di Carlo et al., 2019), with a medium water flux and by simply placing the bottle

in vertical position during filling operation, as a common user would have done (Figures 2b, 2c, 2d and 2e). The sealed samples were then transported to the University "Goce Delčev", Faculty of Natural and Technical Sciences in Štip, where the radon

concentration measurements were performed. An effective time delay between the sample collection and measurements was kept below 6 h in order to increase measurements precision and to reduce radon loss due to diffusion through PET.



Fig. 2. a) Star denotes position of the sampling areas – the public water fountains in the Kratovo-Zletovo volcanic area (southeastern flank); b) Sampling the public fountain near the Dobrevo Pb-Zn mine; c) Sampling the public fountain near the Dobrevo village; d) Sampling the public fountain near the Dreveno village; e) Sampling the public fountain near the Kalnište village

Measurement system and procedure

Water quality parameters measurements such are pH, electrical conductivity and total dissolved solids (TDS) were performed using a glass electrode. The instrument used was the HANNA LF120 by HANNA Pvt. Ltd with an accuracy of 0.1 pH units and relative accuracy of 1% for the other two parameters.

Radiometric measurements were carried out by AlphaGUARD DF2000 (Bertin Instruments®) in order to measure radon/radium concentrations, and AquaKIT (Bertin Instruments®) accessory for samples degassing (Figures 3a, 3b). According to Jobbágy et al. (2017), the emanometry techniques relying on ionization chamber are characterized by a low detection limit (0.3 Bq 1^{-1}) and a typical uncertainty (coverage factor k = 1) ranging between 5% and 12%.






Fig. 3. a) Scheme and b) illustration of radon in water concentration experimental setup. The diagram shows the position where temperature and pressure are monitored. Attention should be paid to tubes length and internal diameter when computing the inner volume of the whole apparatus (Saphymo GmbH, 2017)

The measuring set-up (Figure 3), consists of: (*i*) a degassing vessel, a custom gas washing vessel of DURAN® that hosts the degassing process; (*ii*) a security vessel, a DURAN® container to collect all the water drops in the gas flow; (*iii*) an active coal filter, used to reduce the radon content in the measurement set-up before injecting the sample; (*iv*) an Alpha Pump (Bertin Instrumens®); (*v*) six connecting tubes, Tygon® connections of different length and with an interior diameter of 4 mm (5/32").

It is important to declare that:

- the lower nozzle of the degassing vessel is connected to the lower nozzle of the security vessel;
- the upper nozzle of security vessel is connected to the volumetric pump inlet;
- the volumetric pump outlet is connected to the inlet of ionization chamber;
- the ionization chamber outlet is connected with the upper nozzle of the degassing vessel such to close the circuit.

When all previous requirements are satisfied, the pressure head by the volumetric pump over comes the hydraulic head of the circuit preventing the water from flowing backward the ionizing chamber of the continuous radon monitor.

The radon concentration in water results from the following equation:

 $C_{\text{water}} =$

$$= \frac{C_{\text{Air}} \cdot \left[\frac{V_{\text{system}} - V_{\text{sample}}}{V_{\text{sample}}} + k \right] - C_o \cdot \left[\frac{V_{\text{system}} - V_{\text{sample}}}{V_{\text{sample}}} \right]}{1000}$$

where:

- C_{water} is the radon concentration in the water sample [Bq l^{-1}];
- $C_{\rm air}$ is the radon concentration [Bq m⁻³] of the air flowing in the measuring system during the degassing process of water samples. The radon concentration is monitored by the detector, whose functioning mode is set to 1 min FLOW, for 20 minutes. The air flow rate is set to 0.5 1 min⁻¹.
- C_0 is the radon concentration [Bq m⁻³] of the air contained in the measuring system before the injection of the sample inside the degassing vessel. The radon concentration is monitored by the detector, whose functioning mode is set to 1 min FLOW, for 10 minutes. The air flow rate is set to 0.5 1 min⁻¹.
- V_{system} is the total volume [ml] of the complete measuring system, 1150 ml \pm 1%, according to AquaKIT manual (Saphymo GmbH, 2017).

- V_{sample} is the water sample volume (ml). All the measurements referred in this paper were performed with a sample volume of 100 ml.
- *K* is the Ostwald absorption coefficient which describes the ratio of the radon concentration in water to the radon concentration in air, at thermodynamic equilibrium. This coefficient has been computed using the following mathematical formula: $K = 0.105 + 0.405e^{-0.0502.T}$ [°C] (Battino and Clever, 1965; Weigel, 1978).

As it was already mentioned above, radium is naturally occurring radioactive element in the Earth's crust and it is chemically similar to calcium and absorbed from soil by plants, passed up the food chain to humans. The radiation emitted by radium will affect the tissues in the bone marrow that produces red blood cells and also can cause bone cancer (Shivakumara et al., 2014). We would like to stress that radium (226Ra) and its radioactive decay products are responsible for much of the internal dose that humans receive from natural radionuclides. In general radium (226Ra) is a direct precursor of radon (222 Rn), and is in secular equilibrium with it. λ_{Ra} and λ_{Rn} (the radioactive decay constants of radium and radon) have been found to be appropriate for the number of radium and radon atoms N_{Ra} and N_{Rn} (Shivakumara et al., 2014). In the case of secular equilibrium, during $t \ll T_{1/2(Ra)}$, where $T_{1/2(Ra)} = 1620$ years, the rate of disintegration of radium is actually constant, so it can be roughly said that $e^{-\lambda_{Rn}t} \approx 1$, which means $N_{Ra} = N_{Ra}$ (0) and the number of radon atoms is given by the equation:

$$N_{\rm Rn} \approx N_{\rm Ra} \frac{\lambda_{\rm Ra}}{\lambda_{\rm Rn}} (1 - e^{-\lambda_{\rm Rn} t}).$$

In addition, even if the condition $t \ge T_{1/2 \, (\text{Rn})}$ is satisfied, where $T_{1/2 \, (\text{Rn})} = 3.82$ days, then $e^{-\lambda_{\text{Rn}} t} \approx 0$, which leads to the equation:

$$N_{\rm Rn} = N_{\rm Ra} \frac{\lambda_{\rm Ra}}{\lambda_{\rm Rn}}$$

or that $\lambda_{Rn} \cdot N_{Rn} = \lambda_{Ra} \cdot N_{Ra}$, which actually means that the activities of the parent (226 Ra) and the "daughter/product" (222 Rn) become equal. In practice this means that the radon concentration is equal to the radium concentration, this occurs after a period of 30 days when radium can be counted in a secular balance with radon. For the analysis data processing was used Data View software by Bertin Instruments®.

RESULTS AND DISCUSSION

Our analyses of four samples (each sample was analyzed for radon and radium) taken consecutively showed the results as given in Table 1 and Table 2. Below, we present in more detail the results and comments related to radon and radium.

Radon

All the analyses of the radon in air within water samples from the analyzed samples (Fountain 1 to

Fountain 4) showed minimal values within range from 1.83 to 20.68 Bq m⁻³, maximal values within range from 1179.61 to 19174.00 Bq m⁻³, average values ranged from 477.86 to 9142.37 Bq m⁻³, while median values were within range from 558.98 to 14189.70 Bq m⁻³ (Table 1; Figure 4).

Calculation of radon in water measurements, for the Fountain 1 to Fountain 4 samples, ranged from 6.53 up to 157.73 Bq l⁻¹ (Table 1; Figure 4).

Table 1

Radon concentration in air and water within water samples
from the public water fountains in the Moklište area

Sample	N (number of measurements)	MinAir (Bq m ⁻³)	MaxAir (Bq m ⁻³)	AverageAir (Bq m ⁻³)	MedianAir (Bq m ⁻³)	Water (Bq l ⁻¹)
F1	37	20.68	1179.61	477.86	558.98	6.53
F2	33	7.99	1678.10	758.69	1048.22	11.52
F3	34	1.83	19174.00	9142.37	14189.70	157.73
F4	36	8.30	7151.12	3854.81	5576.53	60.23

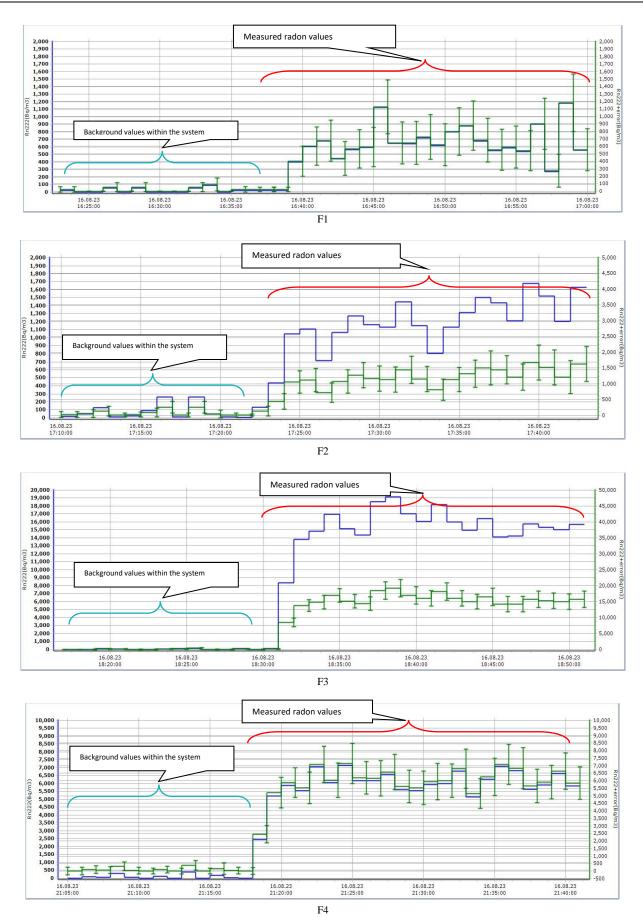


Fig. 4. Radon measurements, in all 4 public water fountains samples (F1-F4)

Results of radon analyses in the respective public fountains water samples were compared with Macedonian national reference value (MDK; 1000 Bq I⁻¹), World Health Organization reference value of 100 Bq I⁻¹ (WHO, 2011; WHO 2018) and the strictest one given by United States Environmental Protection Agency or US-EPA (US-EPA, 1999),

which is set at 11.1 Bq l⁻¹ (Di Carlo et al. (2019). As can be seen from Table 1 and Figure 5, the concentrations of radon in three of four analyzed water samples (F2, F3 and F4) in the Kratovo-Zletovo volcanic area were above the maximum allowed values according to the US-EPA (US-EPA, 1999).

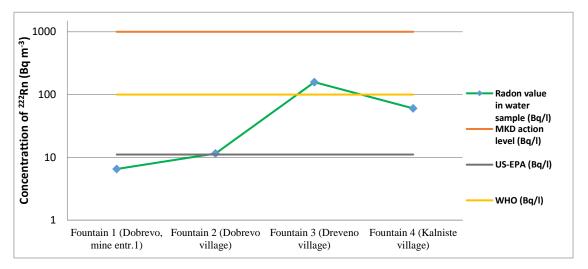


Fig. 5. Concentration of radon in waters from public fountains within Kratovo-Zletovo volcanic area compared to maximum allowed values according to the MDK action levels, World Health Organization (WHO) and United States Environmental Protection Agency (EPA)

Also, we must not ignore the fact that the obtained values for the concentration of radon in these consumable waters, are several times (4–50 times) higher than the values obtained when measuring tap water from homes in the Macedonian city (Tasev et al., 2021).

Radium

As we already mentioned above, after the 30 days period after the initial water sampling, once again we measured the radon in water within the duplicate samples. In practice this means that the ra-

don concentration is equal to the radium concentration due to fact that after a period of 30 days radium can be counted in a secular balance with radon. Our analyses of four samples (Fountain 1 to Fountain 4) taken consecutively showed the results as given in Table 2.

All the analyses of radium in air within water samples from the preventive method showed the lowest minimal value of 18.04 Bq m^{-3} , the highest maximal value of 382.85 Bq m^{-3} , while average values ranged $45.85 \text{ to } 94.01 \text{ Bq m}^{-3}$ and median values from 23.11 Bq m^{-3} to 64.47 Bq m^{-3} (Table 2; Figure 6).

Table 2

Radium concentration in air and water within water samples from the public water fountains in the Kratovo-Zletovo volcanic area

Sample	N (number of measurements)	MinAir (Bq m ⁻³)	MaxAir (Bq m ⁻³)	AverageAir (Bq m ⁻³)	MedianAir (Bq m ⁻³)	Water (Bq l ⁻¹)
F1	34	21.75	97.44	45.85	54.10	0.20
F2	35	21.49	145.01	51.45	23.11	0.26
F3	36	21.47	382.85	94.01	64.47	1.08
F4	35	18.04	176.81	57.13	44.23	0.60

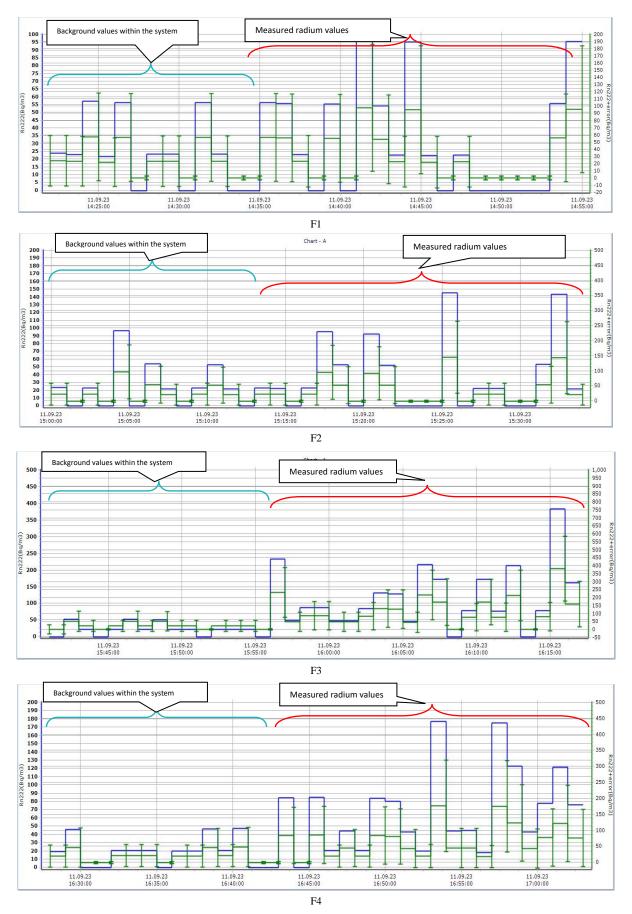
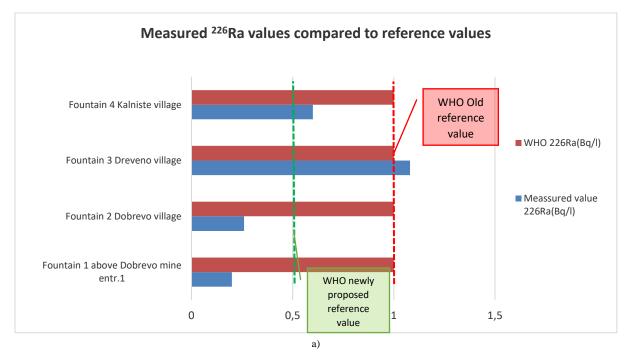


Fig. 6. Radium measurements, in all 4 water fountain samples (F1-F4)

One of the analyzed four samples of drinking waters from public fountains within the Kratovo-Zletovo volcanic area, was above the reference value for radium given by the World Health Organi-

zation (WHO) in the amount of 1 Bq·l⁻¹ (Fountain 3)), while two analyzed samples (Fountain 3 and Fountain 4) have shown concentrations exceeding the newly proposed value of 0.5 Bq·l⁻¹ (Figure 7a).



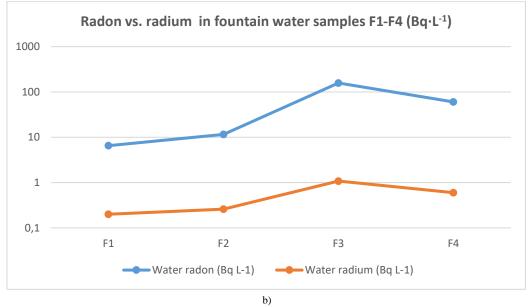


Fig. 7. a) Radium concentration in drinking waters from the Kratovo-Zletovo volcanic area public fountains; **b)** Correlation of radon vs. radium in drinking waters from the Kratovo-Zletovo volcanic area public fountains

As we initially supposed the relation between the radon and radium was strong, as it was confirmed by positive correlation factor of 0.994876, which confirmed strong dependency between the predecessor (226Ra) and successor (222Rn) elements in the uranium decay chain.

Increased values of radon and radium in the studied area can be explained with the fact that rocks of the Kratovo-Zletovo area are mainly of volcanic origin (andesite, trachy-andesite, dacite and rhyolite; Serafimovski, 1990, 1993), with a significant concentration of natural radionuclides, include-

ing radium which decays into radon (Bochicchio et al, 1999),

Dose due to ²²²Rn and ²²⁶Ra concentration in water

The committed effective dose for the population consuming the self-bottled water from the Krtovo-Zletovo volcanic area public drinking water fountains (Fountain 1 to Fountain 4) of the region was estimated using the concentration of ²²²Rn and ²²⁶Ra in water samples and directions given in UNSCEAR (2000), WHO (2011), Shivakumara et al. (2014). The parameters for the inhalation pathway were ²²²Rn concentration in water, air water concentration ratio of 10⁻⁴, indoor occupancy of 7000 h per year, equilibrium factor 0.4 and inhalation dose conversion coefficient 9 nSv (Bq h m⁻³)⁻¹. The effective dose to the ingestion mainly depends upon the amount of water consumed by a human being in a day (in our case 1 1 day⁻¹). The dose due to inhalation and ingestion are calculated by the equations given in UNSCEAR (2000):

Inhalation dose ²²²Rn (µSv) = ²²²Rn_{conc.}) Bq·l⁻¹) × 10⁻⁴ × 7000 h × 0.4 × 9 nSv (Bq·h·m⁻³)⁻¹

Ingestion dose ²²²Rn (µSv) = ²²²Rn_{conc.} (Bq·l⁻¹) 365
$$l$$
 y⁻¹ × 3.5 nSv Bq⁻¹ × 10⁻³

Ingestion dose ²²⁶Rn (µSv) = ²²⁶Rn_{conc.} (Bq·l⁻¹) 365 l y⁻¹ × 0.28 nSv Bq⁻¹ × 10⁻³

Calculated values for the exposure during inhalation of radon and ingestion of radon and radium within water samples from the public water fountains in the central parts of the Kratovo-ZLetovo volcanic area are given in Table 3.

As already mentioned elsewhere (Tasev et al., 2022), the dose due to ²²²Rn is divided into two parts, namely the dose from ingestion and the dose from inhalation. For the ingestion and inhalation part, ²²²Rn and its progeny in water impart a radiation dose to the stomach and lung, respectively.

Table 3 Exposure dose due to inhalation of radon and ingestion of radon and radium within sampled water samples in this study

Sampling location	Fountain 1 (above Dobrevo Pb-Zn mine entrance)	Fountain 2 (near Dobrevo village)	Fountain 3 (Dreveno village)	Fountain 4 (Kalnište village)
Number of measurements	37+34	33+35	34+36	36+35
pH	7.1	7	6.2	6.2
TDS (Rn _{meas} /Ra _{meas.})	460	410	580	630
EC (μS cm ⁻¹) (Rn _{meas} /Ra _{meas.})	930	830	1190	1290
²²² Rn (Bg l ⁻¹)	6.59	11.52	157.73	60.23
²²⁶ Ra (mBg l ⁻¹)	200.00	260.00	1080.00	600.00
Inhalation dose 222 Rn ($\mu Sv\ y^{-1}$)	16.61	29.03	397.48	151.78
Ingestion dose 222 Rn (μ Sv y^{-1})	8.42	14.72	201.50	76.94
Ingestion dose ²²⁶ Ra (μSv y ⁻¹)	20.44	26.57	110.38	61.32
TOTAL dose (μSv y ⁻¹)	45.47	70.32	709.36	290.04
TOTAL dose (mSv y ⁻¹)	0.045465525	0.0703192	0.709355675	0.290043425
TOTAL ingestion dose (mSv y ⁻¹)	0.028858725	0.0412888	0.311876075	0.138263825
TOTAL inhalation and ingestion $^{222}Rn\;(\mu Sv\;y^{-1})$	25.03	43.75	598.98	228.72

Computing from the radium and radon activity concentrations in public fountains water samples, the total dose due to ingestion and inhalation varies from 45.47 to 709.36 mSv y^{-1} , which is below the prescribed dose limit of 100 μ Sv y^{-1} by WHO (2011) for the first two public fountains, while the Fountain 3 and 4 exhibited 7 and 2 times fold higher

values than the one given by WHO, see Figure 8 below. These values were quite compatible when compared to certain values measured around the World, such as those at Malavalli, Mandya and Yettaganahalli in India where the total dose is above maximally allowed $100 \mu \text{Sy y}^{-1}$ due to higher concentration of radium and radon in borewell water (Eckerman et al., 2012; Shivakumara et al, 2014).

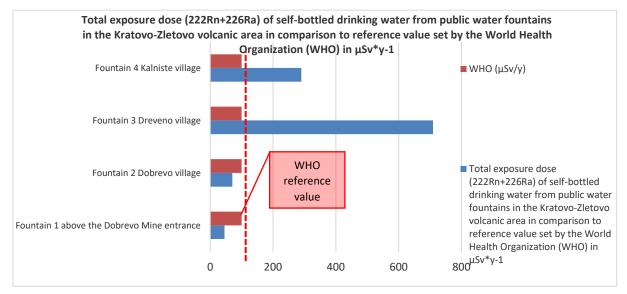


Fig. 8. Total exposure dose for both, ²²²Rn and ²²⁶Ra, in water from the public water fountains at the Kratovo-Zletovo volcanic area (Fountain 1 to Fountain 4)

Also, as indicated by the high correlation ratio ²²²Rn vs. ²²⁶Ra (0.994876), some other intertwined parameters related to the dose due to these two elements showed high correlation factors. Ingestion dose due to ²²⁶Ra vs. concentration of ²²²Rn showed the same exact correlation factor as it was for ²²²Rn vs ²²⁶Ra, while total dose due to ingestion of ²²²Rn and ²²⁶Ra and inhalation of ²²²Rn vs. ²²⁶Rn have

shown even higher correlation factor of 0.999908. Discharging waters of the Kratovo-Zletovo volcanic area fountains were characterized by elevated total dissolved solid content (TDS), temperature and by oxidizing conditions, and therefore with certain uranium content and therefore their radium content is probably higher (Tasev et al, 2021). All the measured can be explained.

CONCLUSIONS

A systematic survey of natural mineral spring waters originating from four water fountains within the Kratovo-Zletovo volcanic area (Fountain 1 to Fountain 4) Republic of North Macedonia was carried out in order to evaluate if contained radon and radium levels may be of public health concern due to regular consumption by local inhabitants. The presence of radon in fountain waters compared to the parametric value was previously not analyzed in the subject region.

These particular measurements and analysis of the samples allowed us to determine the concentration of radon and radium in the self-bottled water from the four public fountains located at the Kratovo-Zletovo volcanic area that the consumers directly use them on daily basis, which is a common habit in this region. Namely, the radon concentrations were in the range 6.59 to 157.73 Bq l⁻¹, which for Fountain 3 and Fountain 4 significantly exceeded the strictest US-EPA standards for drinking water of 11.1 Bq l⁻¹. Similar as it was case with radon, radium measurements showed a range of concentrations from 0.20 to 1.08 Bq l⁻¹, which in this case exceeded the existing (1.0 Bq l⁻¹) and

suggested (0.5 Bq l⁻¹) values according to the World Health Organization for the waters from Fountain 3 and Fountain 4. Also, in that direction were calculated effective doses due to inhalation of radon and ingestion of radon and radium, in the range from 45.47 to 709.36 mSv y⁻¹, which for waters from Fountain 3 and Fountain 4 exceeded the maximum permissible values of 100 mSv y⁻¹. Results as these are can be explained with the fact that rocks of the Kratovo-Zletovo area are mainly of volcanic origin (andesite, trachy-andesite, dacite and rhyolite;

Serafimovski, 1990, 1993), with a significant concentration of natural radionuclides, including radium which decays into radon (Bochicchio et al, 1999). If the results of this particular survey will be confirmed by further and more detailed studies in other adjacent zones, requirements regarding radon as well as radium, some sort of control in mineral waters should probably be considered for the future, especially for habitants where consumption of such waters cannot be considered negligible.

REFERENCES

- Alshamsi, D. M., Murad, A. A., Aldahan, A., Hou, X. (2013): Uranium isotopes in carbonate aquifers of arid region setting. J Radioanal Nucl Chem 298, pp. 1899–1905.
- Arsovski, M., Petkovski, R. (1975): Neotectonics of SR Macedonia: Skopje, Institute of Earthquake Engineering and Engineering Seismology, Publication no. 49, 100 pp. (in Macedonian, with English summaries).
- Arsovski, M. (1997): Tectonics of Macedonia. Faculty of Mining and Geology, Štip, 306 pp. (In Macedonian).
- Battino, R. and Clever, H. L. (1965): The solubility of gases in liquids. Chem. Rev. 66, 395-463.
- Bochicchio, F., Venuti, G., Piermattei, S., Torri, G., Nuccetelli, C., Risica, S., Tommasino, L. (1999): Results of the national survey on radon indoors in all the 21 Italian regions. Conference: Workshop "Radon in the Living Environment", Athens (Greece), pp. 997-1006.
- Boev, B., Yanev, Y. (2001): Tertiary magmatism within the Republic of Macedonia: A review: Acta Volcanologica, Vol. 13, pp. 57-71.
- Di Carlo, C., Lepore, L., Venoso, G., Ampollini, M., Carpentieri, C., Tannino, A., Ragno, E., Magliano, A., D'Amario, C., Remetti, R., Bochicchio, F. (2019): Radon concentration in self bottled mineral spring waters as possible health issue. Scientific Reports (Natureresearch), 9 (1).
- Dimitrijević, M. (1974): The Serbo-Macedonian massif. Tectonic of the Carpathian-Balkan Regions. Geological Institute Dyoniz Štur, pp. 291–296.
- Eckerman, K., Harrison, J., Menzel, H. G., Clement, C. H. (2012): ICRP Publication 119: compendium of dose coefficients based on ICRP Publication 60, Annals of the *ICRP* **41** (Suppl.1), pp. 1–130.
- Eröss, A., Surbeck, H., Csondor, K., Horváth, Á., Mádl-Szönyi, J., Lénárt, L. (2015): Radionuclides in the waters of the Bükk region, Hungary. J Radioanal Nucl Chem 303, 2529-
- Fonollosa, E., Peňalver, A., Borrull, F., Aguilar, C. (2016): Radon in spring waters in the south of Catalonia. J. Environ. Radioact. 151, 275–281.
- Harkovska, A., Yanev, Y., Marchev, P. (1989): General features of the Paleogene orogenic magmatism in Bulgaria. *Geologica Balcanica* **19**, No I, pp. 37–72.
- Hristov, S., Karajovanović, M., Stračkov, M. (1973): Manual for the Basic Geological Map of SFRJ, 1: 100 000, Sheet Kavadarci, Geological Survey, Skopje [in Macedonian].
- Ilani, S., Minster, T., Kronfeld, J., Even, O. (2006): The source of anomalous radioactivity in the springs bordering the Sea

- of Galilee, Israel. Journal of Environmental Radioactivity 85, pp. 137-146.
- ISO International Standard Organization (2013a): Water Quality – Radon-222. Part 1: General principles.
- ISO International Standard Organization (2013b). Water quality – Radon-222. Part 3: Test method using emanometry.
- Ivanov, T. (1966): Metalogenija južnog dela Vardarske zone [Metallogeny of the southern part of the Vardar zone – in Serbian]. Proceedings of the VIth Counceling, V. II, Ohrid, 424-448.
- Jobbágy, V., Altzitzoglou, T., Malo, P., Tanner, V., Hult, M. (2017): A brief overview on radon measurements in drinking water. J. Environ. Radioact. 173, 18-24.
- Kralik, C., Friedrich, M., Vojir, F. (2003): Natural radionuclides in bottled water in Austria. J. Environ. Radioact. 65, pp. 233-241.
- Leaney, F. W., Herczeg, A. L., Land, C., Osmond, G. A. (2006): Rapid field extraction method for determination of radon-222 in natural waters by liquid scintillation counting. Limnol. Oceanogr. Methods, 254–259.
- Lubin, J. H., Boice, J. D., Edling, C., Hornung, R. W., Howe, G. R., Kunz, E., et al. (1995): Lung cancer in radonexposed miners and estimation of risk from indoor exposure. Journal of the National Cancer Institute 87, pp. 817-827.
- Lucchetti, C., De Simone, G., Galli, G., Tuccimei, P. (2016): Evaluating radon loss from water during storage in standard PET, bio-based PET, and PLA bottles. Radiat. Meas. **84.** 1–8 (2016).
- Moldovan, M., Cosma, C., Encian, I., Dicu, T. (2009): Radium-226 concentration in Romanian bottled mineral waters. Journal of Radioanalytical and Nuclear Chemistry, Vol. **279**, No. 2, pp. 487–491.
- Moreno, V., Bach, J., Baixeras, C., Font, L. (2014): Radon levels in groundwaters and natural radioactivity in soils of the volcanic region of La Garrotxa, Spain. J. Environ. Radioact. 128, 1-8.
- Najeeb, N. K., Vinayachandran, N., Jose, B., Vashistha, R. (2014): Radon in groundwater in Tumkur district of Karnataka with special reference to sampling sensitivity. Journal of the Geological Society of India, 83, pp. 665-
- Sannappa, J., Chandrashekara, M. S., Paramesh, L. (2006): Spatial distribution of radon and thoron concentrations indoors and their concentrations in different rooms of buildings. Indoor and Built Environment, 15 (3), pp. 283-288.

- Saphymo GmbH (2017): Alpha Guard Professional Radon Monitor Types D50, D2000, DF2000. User Manual 12, 73 pp.
- Serafimovski, T. (1993). Structural metallogenic features of the Lece-Chalkidiki zone: types of mineral deposits and distribution. Faculty of Mining and Geology, Shtip, University "Sts. Cyril and Methodius", Special issue 2, 328 pp.
- Shivakumara, B. C., Chandrashekara, M. S., Kavitha, E., Paramesh, L. (2014): Studies on ²²⁶Ra and ²²²Rn concentration in drinking water of Mandya region, Karnataka State, India. *Journal of Radiation Research and Applied Sciences*, Vol. 7, pp. 491–498.
- Statista (2016): The Statistics Portal. Per capita consumption of bottled water in Europe in 2016, by country.
- Stojanova, V., Petrov V. (2012): Foraminifers and nannofossils from upper flysch lithozone in the Tikveš basin, Republic of Macedonia. *Geologica Macedonica*, **26**, 1, 87–98.
- Stojanova, V., Petrov, G. (2014): Litostratigraphic characteristics of Paleogene basins in the Republic of Macedonia. Geologica Macedonica, 28 (2). pp. 175–183 ISSN 0352–1206..
- Tasev, G., Serafimovski, T., Serafimovski, D. (2021): Radon and radium in tap drinking waters in the city of Kavadarci. *Geologica Macedonica*, **35** (1). pp. 15–26. ISSN 0352–1206.
- Tasev, G., Serafimovski, T., Boev, B., Gjorgiev, L. (2022): Radon and radium concentration in self-bottled mineral

- spring water from the public fountain "Elixir" at the Moklište area, Republic of North Macedonia. *Geologica Macedonica*, Vol. **36**, No. 1, pp. 55–72. On print ISSN 0352–1206 (On line ISSN 1857–8586).
- UNSCEAR, United Nations Scientific Committee on the Effects of Atomic Radiation (1993): Sources and Effects of Ionizing Radiation. Vol. I
- UNSCEAR. (2000): Report to the General Assembly with Scientific Annexes. New York: United Nations. Annex B (pp. 97–108).
- UNSCEAR. (2006): Report to the General Assembly, with Scientific Annexes. Effects of Ionizing Radiation. Vol. II.
- US-EPA (1999): Radon in Drinking Water: Health Risk Reduction and Cost Analysis. Federal Register 64, Washington
- Weigel, F. (1978): Radon. Chem. Zeitung 102, 287-299.
- WHO World Health Organization (2008): Guidelines for Drinking Water Quality. Incorporating First and Second Addenda, Third ed. WHO Press, Geneva. Switzerland.
- WHO World Health Organization (2011): Guidelines for Drinking-Water Quality, Second Edition. https://doi.org/10.1017/CBO9781107415324.004.
- WHO World Health Organization (2018). Management of Radioactivity in Drinking Water.

Резиме

КОНЦЕНТРАЦИЈА НА РАДОН И РАДИУМ ВО ВОДА ОД ЈАВНИ ЧЕШМИ ВО ЦЕНТРАЛНИТЕ ДЕЛОВИ НА ВУЛКАНСКОТО ПОДРАЧЈЕ КРАТОВО-ЗЛЕТОВО, РЕПУБЛИКА СЕВЕРНА МАКЕДОНИЈА

Горан Тасев¹, Далибор Серафимовски², Блажо Боев¹, Лазар Ѓоргиев¹, Тодор Серафимовски¹

¹Факулійей за йриродни и йехнички науки, Универзийей "Гоце Делчев" во Шйий, Бул. "Гоце Делчев" 89, й. фах 201, 2000 Шйий, Северна Македонија ²Елекйройехнички факулійей, Универзийей "Гоце Делчев" во Шйий, Бул. "Крсйе Мисирков" 10-А, й. фах 201, 2000 Шйий, Северна Македонија goran.tasev@ugd.edu.mk

Клучни зборови: радон; радиум; вода; чешми; ефективна доза; Кратово; Злетово

Во трудот се претставени информации од нашите најнови испитувања на радонот и радиумот во водата за пиење од јавните чешми во централните делови на кратовско-злетовската вулканска област. Резултатите од мерењата на радонот во испитуваната вода, примероците од чешма 1 до чешма 4, се движеа од 6,63 до 157,73 Bq $\rm l^{-1}$. Добиените резултати за радиумот во водата, примероците од чешма 1 до чешма 4, се движеа од 0,20 до 1,08 Bq $\rm l^{-1}$. Мерењата и на радонот и на радиумот во примероците вода од дадените чешми покажаа значително повисоки вредности од најстрогите стандарди дадени од Агенцијата за заштита на

животната средина на Соединетите Држави (USEPA) и Светската здравствена организација (C3O). Нивната ефективна доза што ја прима населението кое ја консумира водата од вулканската област Кратово-Злетово директно од чешмите или како само-флаширана, беше проценета мерејќи ја концентрацијата на ²²²Rn и ²²⁶Ra во примероците вода, а која се движи од 45,47 µSv y⁻¹ до 709,36 µSv y⁻¹, што повторно покажа дека концентрацијата на овие елементи во некои јавни чешми е повисока од препорачаната од С3О, односно од максималните 100 µSv y⁻¹.