

NATURAL TRACERS AS A TOOL FOR UNDERSTANDING THE FUNCTIONING OF THE KARST SYSTEM AND ITS VULNERABILITY - A CASE STUDY OF THE MANASTIREC SPRING

Biljana Gičevski^{1*}, Vojo Mirčovski², Slavčo Hristovski³, Metka Petrič⁴

¹*Exploring society “Ursus speleos”, Dobromir Hrs 20a, 1000 Skopje, North Macedonia*

²*Faculty of Natural and Technical Sciences, Goce Delcev University, Goce Delčev, Stip, Blvd Goce Delcev 89, 2000 Sip, Republic of North Macedonia*

³*Institute of Biology, Faculty of Natural Sciences and Mathematics, Ss. Cyril and Methodius University, Arhimedova 3, 1000 Skopje, Republic of North Macedonia*

⁴*Karst Research Institute ZRC SAZU, Titov trg 2, 6230 Postojna, Republic of Slovenia
biljana_speleo@yahoo.com*

A b s t r a c t: The Manastirec spring is the only drinking water source that supplies 200 inhabitants of the municipality Goren Manastirec in West-Central Macedonia. Natural tracers were applied in order to characterize the properties of the groundwater flow and transport of contaminants through the karst system and to study the functioning of the spring. Water level, temperature and electrical conductivity of the spring were measured with data logger in hourly intervals during several rain events in 2015 and 2016. Rain events caused rise of water level and decrease of both water temperature and electrical conductivity. Concentrations of calcium, magnesium, sulphate and nitrate present in spring water were analyzed during the end of July 2016, during three rain events. The results showed that sulphate and Ca/Mg ratio increase, whereas nitrate decrease after rain events. All results demonstrate high vulnerability of the Manastirec spring to contamination.

Key words: natural tracers; hydrochemistry; Manastirec karst spring

INTRODUCTION

Groundwater of karst aquifers is very important source of drinking water supply. At the same time, karst aquifers are commonly highly vulnerable to contamination and are impacted by a wide range of human activities as urban settlements, industry, agriculture and traffic (Drew & Hötzl 1999, Kogovšek 2011, Petrič et al. 2011). In order to protect the karst water from pollution it is necessary to investigate the properties of the groundwater flow and transport of contaminants through the karst systems.

Different research methods are used in the studies of karst water. Artificial and natural tracers are often applied to study the hydrogeological functioning and response of karst aquifers. Physical properties of water, such as temperature and electrical conductivity, are tools that are often used as natural tracers. Simultaneous consideration of natural tracers and spring discharge (water level) provides information about the transfer functioning of the karst system (Petrič 2002; Ford &

Williams, 2007). This kind of analysis is often applied in the world (Gabrovšek & Peric, 2006; Nguyet & Goldscheider, 2006; Mulec et al., 2019), and in the Republic of Macedonia they are solely for the karst spring Slatinski Izvor (Gičevski et al., 2016).

An important characteristic of karst water is the prominent role of hydrometeorological events (flood events) on chemical changes in the aquifer. Therefore any hydrochemical information needs to be coupled with a hydraulic information (discharge, water level) (Perrin, 2003). Hydrochemical methods help to locate and quantify the mineralization of the water, provide information about the structure of the aquifer, the residence time of water and the various conditions of circulation that coexist within them (Hunkeler & Mudry, 2007; Lopez-Chicano et al., 2001).

The Manastirec spring is the only natural resource for drinking water of the municipality Goren Manastirec. This study is based on natural tracers that are an important tool for investigating the functioning of the karst system and assessment of its vulnerability to pollution.

Water level, temperature and electrical conductivity of the spring, as well as concentrations of calcium, magne-

sium, sulphate and nitrate present in water were measured during several rain events in 2015 and 2016.

STUDY AREA

The Manastirec spring (Figure 1) is located in the basin of Poreče in west-central Macedonia, in the valley of the Manastirička Reka river.

The wider area around the source belongs to two geotectonic units: the Pelagonian Horst Anticlinorium and the West Macedonian Zone (Arsovski, 1997). It is built of Precambrian, Riphean-Cambrian, Paleozoic, Mesozoic, Tertiary, and Quaternary rocks (Figure 2) (Dumurdzanov et al., 1978, 1979). The Manastirets spring belongs to the Pelagonian Horst Anticlinorium (Figure 2).

The oldest rocks in the Pelagonian Horst Anticlinorium are Precambrian dolomite marbles that are tectonically crushed and well karstified, and graphite and quartz-muscovite schists of riphean-Cambrian age.



Fig. 1. The karst spring Manastirec (photo: B. Gičevski)

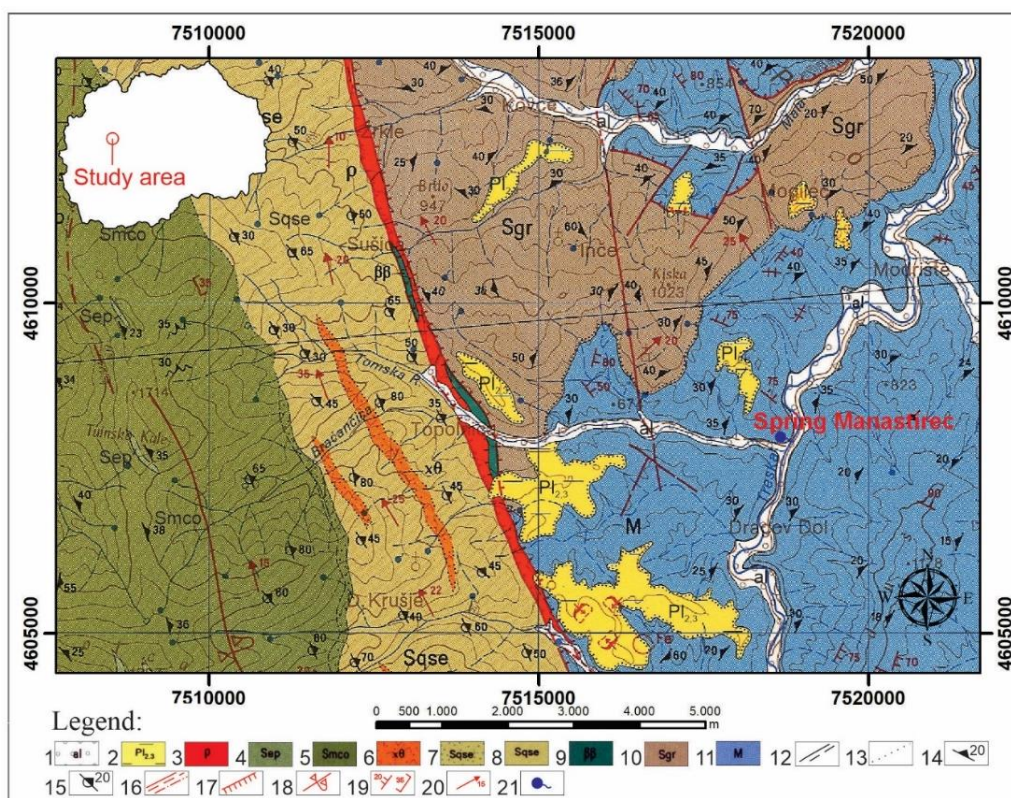


Fig. 2. Geological map of the researched area (Dumurdzanov et al. 1978)

Legend: **Quarternary**: 1. Alluvium, **Tertiary**: 2. Pliocene sediments (gravel, sands, clay), **Mesozoic**: 3. Aplitic granite, **Paleozoic**: 4. Epidote-chlorite-amphibole schists 5. Muscovite-chlorite-quartz schists, 6. Metarhyolite, metarhyolite tuffs 7. Feldspatic quartz-sericite schists and metasandstones 8. Quartz-sericite schists and metasandstones, 9. Metadiabase, **Precambrian**: 10. Graphitic and quartz-muscovite schists (Riphean-Cambrian), 11. Dolomite marbles, 12. Normal border established and assumed 13. Gradual transition established 14. Foliation normal 15. Foliation inverse 16. Faults 17. Active contact 18. Anticline axis leaning 19. Crack and vertical crack, 20. Elements of axis drop of small folds 21. Spring.

The West Macedonian zone is built of Paleozoic epidote-chlorite-amphibole schists, muscovite-chlorite-quartz schists, metriolilites, metariolite tuffs, quartz-sericite schists and metasandstones. These are moderately permeable rocks with fissured porosity.

The contact between the two tectonic units is composed of Paleozoic metadiabases and Mesozoic aplite granites that have fissure porosity. The dolomite marbles are covered with Pliocene sediments (gravel, sand, clay) which in some parts are well-permeable rocks and they have intergranular porosity. Quaternary sediments are represented by alluvium, which have intergranular porosity, and fill the riverbed of the Manastirička Reka.

The two tectonic units are separated by a fault oriented in the NW-SE direction that is tracked for more than 50 km (Dumurdzanov et al., 2005). There is a fault between the villages of Slatina and Zrkle in the NW-SE direction, and several faults in the NW-SE direction in the lower parts of the Manastirička Reka river valley.

The sources of the Manastirička Reka and its tributaries Tomska Reka and Bračančica are in a non-carbonate environment. In contact with carbonate rocks, the Manastirička Reka sinks underground

ground as a point input into the karst system and flows underground. As a result, the riverbed is dry in summer.

Hydrogeological characteristics of the wider environment of the Manastirec spring are shown on the hydrogeological map (Figure 3). According to the structural type of porosity which occurs in rocks that are present within the wider environment of the investigated field can be distinguished: boundary type of aquifer, karst aquifer, and fissure type of aquifer.

Boundary type of aquifer is formed in Quarter alluvial sediments and Tercier Pliocene sediments (gravel, sands, clay), in which it is present intergranular porosity. Alluvial sediments are developed in the river Manastirička Reka.

Fissure type of aquifers is formed in Mesozoic aplitic granite, Paleozoic epidote-chlorite-amphibole schists, muscovite-chlorite-quartz schists, metariolite, metariolite tuffs, Feldspatic quartz-sericite schists and metasanstone, quartz-sericite schists and metasandstones, metadiabase, and Riphean-Cambrian graphitic and quartz-muscovite schists.

Karst aquifer has developed in karstified Precambrian dolomite marbles, characterised by fracture – cavernous porosity.

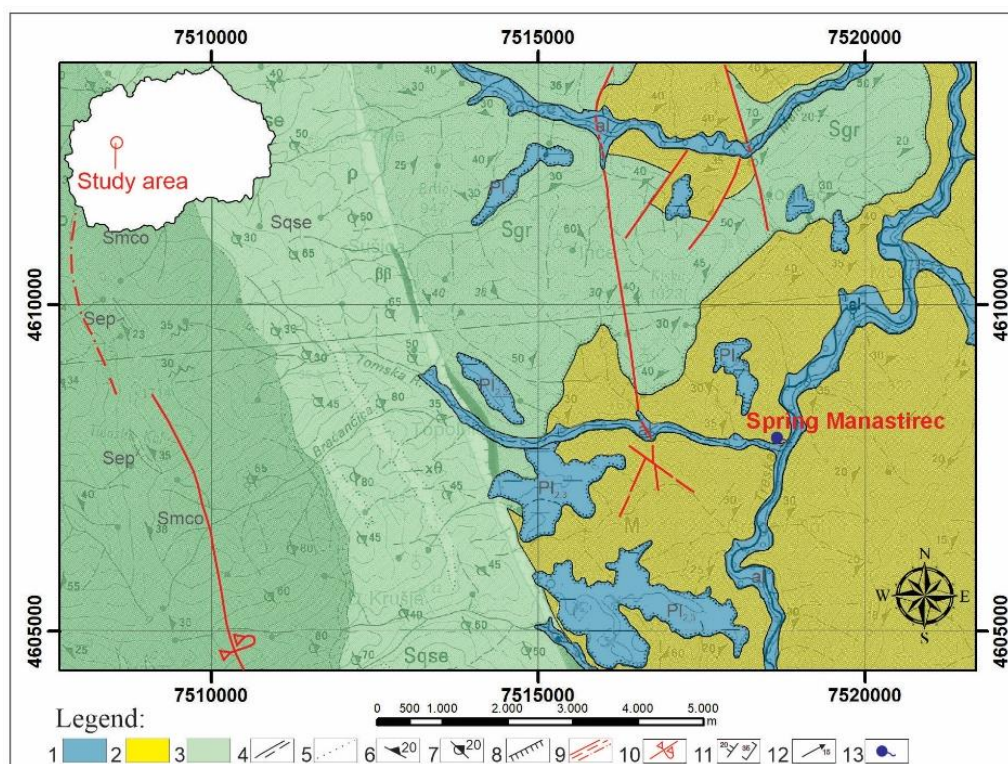


Fig. 3. Hydrogeological map of the researched area, according to Mirčovski
Legend: 1. Boundary type of aquifer, 2. Karst aquifer 3. Fissure type of aquifer

METHODS AND MATERIALS

Electrical conductivity (EC), water temperature and water level of the Manastirec spring were carried out in the period 2015–2016 using an Eijkelkamp CTDI 271 data logger, in hourly intervals. The relation between water level data and series of parallel measurements of levels and discharges was used for the estimation of discharges of the Manastirec spring.

We used data from a rain gauge in the village Lokvice which measured precipitation at daily intervals.

The chemical properties of water were analyzed at the Institute of Biology, Faculty of Natural

Sciences and Mathematics, Ss. Cyril and Methodius University in Skopje. All water samples were filtered within 12 hours of collection and analyzed within 3–4 days. Sulphate was determined by photometric method (Dévai et al., 1973). The major cations calcium (Ca^{2+}) and magnesium (Mg^{2+}) were analyzed by wet digestion followed by atomic absorption spectrometry on Agilent 55Z or graphite furnace Agilent 240Z (Allen, 1989). All of the values are presented in mass concentrations ($\text{mg}\cdot\text{L}^{-1}$). The mole ratio of calcium and magnesium ($r = n(\text{Ca}^{2+})/n(\text{Mg}^{2+})$) was calculated based on the values of the respective ions expressed in $\text{meq}\cdot\text{L}^{-1}$.

RESULTS AND DISCUSSION

Rapid changes in discharges and changes in the physical properties and chemical composition of the water are characteristic of karst springs. Because of this, to study the functioning of the karst system numerous field measurements and data are necessary, more than for non-karst terrain.

Hydrograph of karst springs are indicators of karst aquifers (Bonacci 1993) and they represent the result of various processes taking place in the karst basin from the moment when the precipitation fell on the basin to the moment when it reached the spring outlet (Kresic and Bonacci 2010). Discharge hydrograph mostly of descending springs draining heavily karstified aquifers with numerous large karst conduits react very quickly to the precipitation that falls on the basin, whereas, deep, mostly rising karst springs, isolated from the influence of the processes that take place in the catchment areas, react more slowly (Bonacci and Roje-Bonacci 2023). Any variation in electrical conductivity and water temperature in various time increments indicates that the water comes from another part of the aquifer or basin, that it is transported quickly through large karst conduits or slowly through the karst matrix, and that it stays in the karst aquifer for a shorter or longer time. Seasonal and daily variations of karst spring water's geochemical and physical parameters characterise the karst aquifer's different types and functioning (Benderitter and Roy 1993; Birk et al. 2004; Pratama et al. 2021).

Flood pulses from rain events in 2015 and 2016 Time interval between September 9th and September 12th, 2015

This time interval was selected at the end of a longer dry period. In the period between August 18th

and September 9th 2015, in the area, only 1.5 mm of rain had fallen. During this period, the water level varied from 44.26 to 49.47 cm, the water temperature was between 11.9 and 12.09 °C, and EC oscillated between 480 and 492 $\mu\text{S}/\text{cm}$.

The intensive rains occurred on September 10th and 11th (29 mm and 10 mm, respectively) which caused an increase of water level (Figure 4).

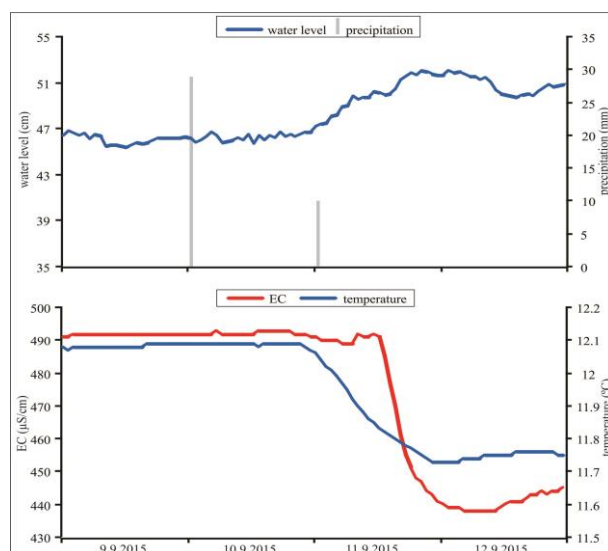


Fig. 4. Measurements of precipitation, water level, temperature and electrical conductivity (EC) in the period between September 9th and September 12th 2015, every hour

Maximal level was reached on September 12th at 1:00 (52.02 cm). During the water level increase the water temperature decreased from 12.9 to 11.73 °C (on September 12th at 3:00). EC was positively correlated to the temperature, and decreased from 493 to 438 $\mu\text{S}/\text{cm}$ (on September 12th at 4:00).

After this rain event the water level started to decrease, whereas water temperature and EC continuously increased.

This interval presents the conditions of low waters. After rain event allogenic recharge from the Manastirečka Reka was activated which flows quickly through the karst system. One day after the rain, water level rises sharply, whereas EC and temperature dropped quickly as a result of the fast circulation of low mineralized water within the system.

*Time interval between March 7th
and March 17th, 2016*

In the period between February 28th and March 7th 2016 only 2.5 mm of rain had fallen in the study area. Water level varied between 68.54 and 73.51 cm, temperature oscillated between 9.61 and 9.68 °C, and EC was in interval between 246 and 250 $\mu\text{S}/\text{cm}$.

The rain on March 8th (19.5 mm) caused rise of the water level to 76.38 cm, and sharp decrease of temperature (9.4 °C) and EC (228 $\mu\text{S}/\text{cm}$). The rain that followed on March 10th (13 mm) caused continuous increase of water level (76.14 cm) and simultaneous decrease of temperature (9.46) and EC (234 $\mu\text{S}/\text{cm}$) at the same day at 21:00. Very little rains on March 11th and 12th (2 mm and 0.5 mm respectively) caused a small increase of water level, and small decrease of temperature and EC. More intensive rains on March 13th and 14th (12.5 mm and 7 mm respectively) caused continuous rise of water level. Maximal value was reached on March 14th at 11:00 (78.80 cm). The water temperature decreased and reached the lowest value of 9.33 °C in the early morning on March 15th. EC also decreased during the whole day on March 14th when it reached value of 222 $\mu\text{S}/\text{cm}$. Low rain on March 16th (3 mm) did not cause significant changes to the physical characteristics of the spring water (Figure 5).

After this rain period, the rain stopped and the water level started continuously to decrease, whereas water temperature and electrical conductivity simultaneously increased.

The interval between March 7th and March 17th 2016 presents the conditions of high waters when the pores of the karst aquifer are filled with water and are hydraulically connected. Rain events in the recharge area of the Manastirec spring cause rapid reactions in the system. The water level increases very fast, on the opposite, the water temperature and electrical conductivity dropped quickly because of

the low mineralization of the groundwater and fast crossing the karst system toward the spring.

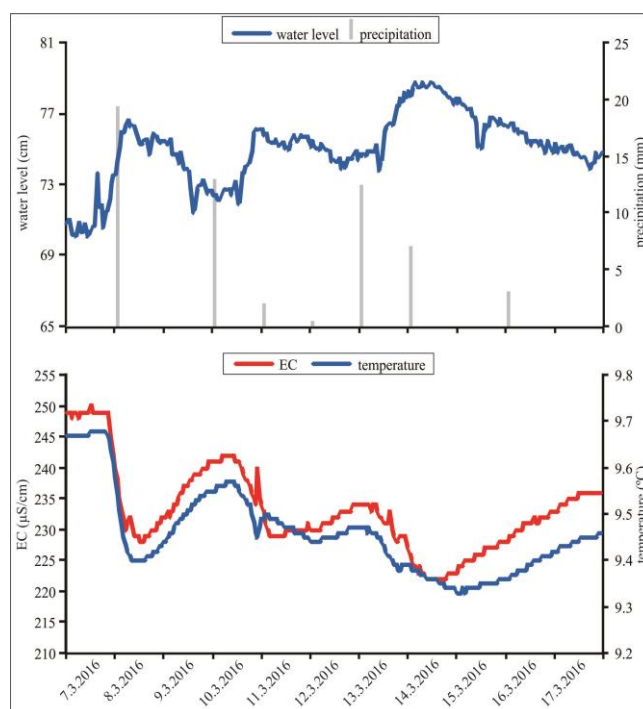


Fig. 5. Measurements of precipitation, water level, temperature and electrical conductivity (EC) in the period between March 7th and March 17th 2016, every hour

*Time interval between September 5th
and September 14th, 2016*

During the August 2016, in the study area, 59.5 mm of rain had fallen. In the period between August 28th and September 5th 2016 there was light rain (4.2 mm). In this period water level varied between 44.01 and 49.98 cm, water temperature was in interval between 11.2 and 11.57 °C, and EC oscillated between 374 and 413 $\mu\text{S}/\text{cm}$.

On September 6th there was light rain (1.2 mm). More intensive rains occurred on September 7th (53.2 mm) and September 8th (57.9 mm) and caused increase of water level from approximately 46 cm (September 6th) to 61.02 cm on September 8th at 17:00 (Figure 5). At this time, the water temperature rapidly decreased from 11.59 °C (September 6th) to 11.01 °C (in midday on September 8th), and EC showed the same oscillations as temperature and values dropped from 414 (September 7th) to 334 $\mu\text{S}/\text{cm}$ (on September 8th at 20:00). The rains in the next five days (total amount of 17.9 mm) caused slow increase of water level and slow decrease of the temperature and EC (Figure 6).

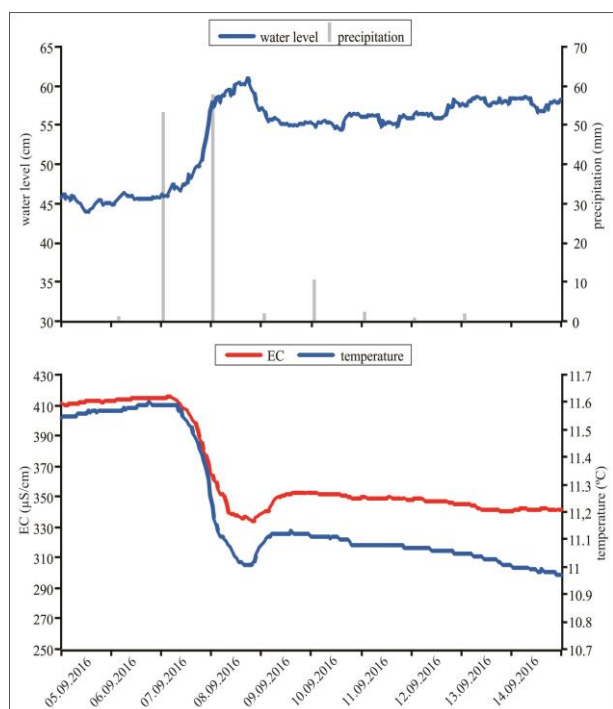


Fig. 6. Measurements of precipitation, water level, temperature and electric conductivity (EC) in the period between September 5th and September 14th 2016, every hour

The analyzed period shows the conditions of the karst system during low waters. Fast changes of water level, water temperature and conductivity after rain event show that the Manastirec spring is characterized by fast reactions to hydrological events. The sharp increase of the water level which is followed with decrease of EC is due to dilution of pre-event water with water from the rain. The infiltrated waters into the karst system have low level of mineralization which is the reason why electrical conductivity drops sharply after the rains. The values of water temperature show the positive correlation to the conductivity which indicates inflow from surface waters.

Dynamics of hydrochemical parameters during the rain events in July and August 2016

During the June 2016, in the area, total of 16.7 mm rain had fallen. In the period between July 1st and July 15th 2016 41 mm of rain had fallen with maximum on July 3th (36 mm). During the period between July 1st and July 15th, the water level varied from 49.56 to 60.15 cm, the water temperature oscillated between 10.66 and 11.12 °C, and EC was between 321 and 389 µS/cm.

The rains on July 16th and July 17th (25.5 mm and 0.4 mm respectively) caused slow increase of water level from 50.64 cm to 53.74 cm. At the same

time, temperature sharply decreased from 11.13 to 10.97 °C, and EC dropped from 374 to 348 µS/cm (Figure 7). In this time interval the sulphate increased from 33.41 to 47.98 mg/l, Ca/Mg rate increased from 2.3 to 2.9, while nitrate decreased from 3.09 to 1.32 mg/l. Also, calcium level increased (up 4.46 meq/l), while magnesium level was slightly increased (1.57 meq/l). Rise in Ca/Mg rate with simultaneous drop in EC and water temperature, and nitrate reflects the impact increase of the fast flowing freshly infiltrated water in the recharge area of the Manastirec spring. According to the low Ca/Mg ratio we would infer that an important inflow are the ponors in Manastirčka Reka which are built in dolomite marbles.

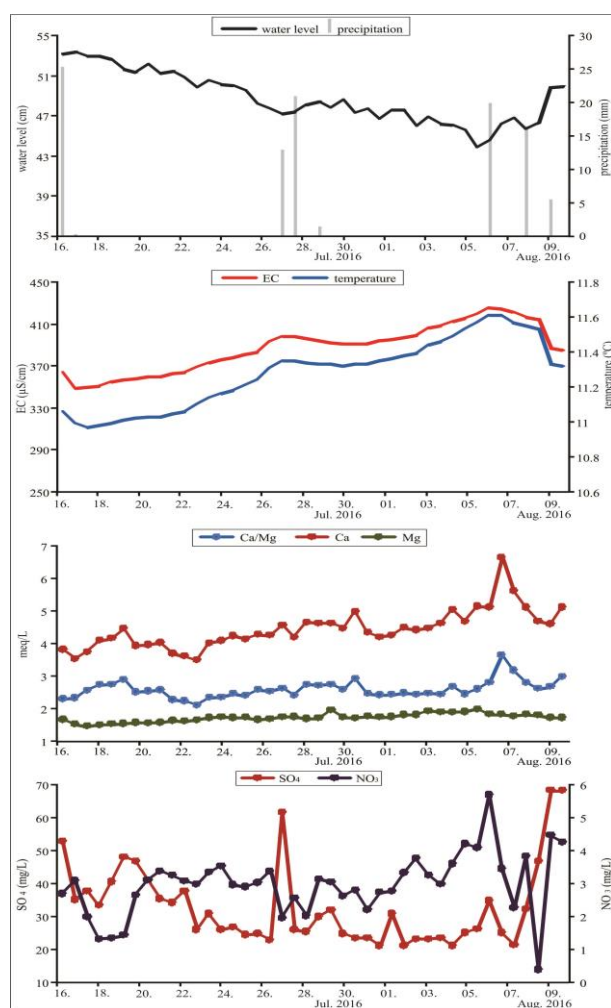


Fig. 7. Variations of water level, electrical conductivity (EC), water temperature and some hydrochemical parameters at the Manastirec spring

In the period between July 18th and July 25th there was no rain event, and water level continuously decreased to 47.09 cm, while water temperature values expressly rose to 11.32 °C, and EC

increased to 394 $\mu\text{S}/\text{cm}$. In this dry interval the sulphate decreased to 22.84 mg/l, nitrate increased from 2.65 to 3.38 mg/l, and Ca/Mg ratio showed variations between 2.11 and 2.58.

More intensive rains that followed on July 26th, 27th and 28th (total amount of 35.5 mm) caused a small increase of water level (48.59 cm), and decrease of the temperature (11.32 °C) and EC values (389 $\mu\text{S}/\text{cm}$). In this interval the concentration of sulphate sharply increased to 61.69 mg/l, the Ca/Mg ratio showed small increase (2.92), and the nitrate decreased to 1.96 mg/l. All above mentioned parameters point out a dilution effect which indicates the rapid arrival of infiltrated rainwater through the system in the spring.

The next eight days were without rainfall. In this period water level showed permanent decrease. On the other hand, temperature and EC showed continuous increase. During the whole analyzed period, the minimal water level of 43.43 cm was recorded in the afternoon on August 6th. The water temperature reached the maximal value of 11.65 °C also on August 6th while EC increased to 430 $\mu\text{S}/\text{cm}$ (August 7th). During the discharge decrease, sulphate slowly decreased, nitrate rose and reached the maximum value (5.69 mg/l) on August 6th, whereas

Ca/Mg ratio showed uniform values which varied between 2.42 and 2.60.

After reaching the minimal discharge of the Manastirec spring very intensive rains on August 6th (20 mm), August 8th (16.5 mm) and August 9th (5.5 mm) caused discharge increase. The highest value of the water level (52.32 cm) was recorded in the early morning on August 11th, while temperature and EC continuously decreased and reached the minimal values in the morning on August 12th (11.15 °C and 367 $\mu\text{S}/\text{cm}$ respectively) (this is not shown on fig. 6). After this rainy interval, dry days followed, which caused decrease of water level and increase of both temperature and EC. In the interval between August 6th and August 9th sulphate sharply increased to 68.27 mg/l and Ca/Mg ratio rose to 2.98, and maximal values were reached on August 9th. The nitrate sharply decreased to 0.38 mg/l on August 8th. At this time we recorded 4.61 meq/l calcium and 1.72 meq/l magnesium. A fast increase of water level which was followed with decreasing of EC, water temperature and nitrate and increasing of sulphate and Ca/Mg ratio is due to dilution of the pre-event water with water from the rain events, and inflow from the river Manastirečka Reka.

CONCLUSION

We observed the variability of the different hydrological parameters during several rain events in 2015 and 2016. Researches of the karst spring Manastirec showed that natural tracers as rains, temperature, electrical conductivity and water level can be better choice than the more complicated artificial tracing tests. Also, sulphate and nitrate levels, as well as the Ca/Mg ratio could be an important natural tracer within the multiparameter monitoring of transport of contaminants through the system. Monitoring of these parameters indicated the properties of the groundwater flow and transport of contaminants from a recharge area of the spring.

The Manastirec spring shows a high temporal variability of hydrologic, physical and chemical parameters. Spring hydrographs respond rapidly and

strongly to rainfall events which show that infiltrated rains into vadose zone flows quickly toward the spring. About one day after the rains, water level rises sharply, whereas both, electrical conductivity and water temperature fall quickly. The electrical conductivity values react fast as a result of the rapid circulation of low mineralized, newly infiltrated water within the karst system. The water temperature value is positively correlated to the electrical conductivity which indicates inflow from surface waters. Our research points out that rain events and chemical responses are controlled by dilution and water-rock interactions. Also, the results show fast arrival of the soluble substances from the surface through the system, which indicates high vulnerability of the Manastirec spring to contamination from the Manastirečka Reka.

REFERENCES

- Allen, S. E. (1989): *Chemical Analysis of Ecological Materials*, Blackwell Scientific Publication, Oxford-London-Edinburgh-Boston-Melbourne, 46–61.
- Arsovski, M. (1997): *Tectonic of Macedonia*. Rudarsko-geološki fakultet, Štip, 306.
- Birk, S., Liedl, R., Sauter, M. (2004): Identification of localized recharge and conduit flow by combined analysis of hydraulic and physico chemical spring responses (Urenbrunnen, SW-Germany). *Journal of Hydrology* **286**, (1–4): 179–193. <https://doi.org/10.1016/j.jhydrol.2003.09.007>

- Benderitter, Y., Roy, B. (1993): Flow characterization through heat transfer evidence in a carbonate fractured medium: first approach. *Water Resour Research* **29**, (11): 3741–3748. <https://doi.org/10.1029/93WR01685>
- Bonacci, O. (1993): Karst springs hydrographs as indicators of karst aquifers. *Hydrological Sciences Journal* **38**, (1): 51–62. <https://doi.org/10.1080/02626669309492639>
- Bonacci, O., Roje-Bonacci, T. (2023): Water temperature and electrical conductivity as an indicator of karst aquifer: the case of Jadro Spring (Croatia), *Carbonates and Evaporites*, Volume **38**, article number 55. <https://doi.org/10.1007/s13146-023-00881-x>
- Dévai, I., Horváth, K., Dévai, Gy. (1973): Sulphate content determination of natural waters and description of a new photometric procedure, *Acta. Biol. Debrecina*, vol. **10–11**, 129–142.
- Drew, D., Hötzl, H. (Eds.) (1999): Karst Hydrogeology and Human Activities. Impacts, consequences and implications, *International Contributions to Hydrogeology*, 20, 322 p.
- Dumurdzanov, N., Serafimovski, T., Burchfiel, B.C. (2005): Cenozoic tectonics of Macedonia and its relation to the South Balkan extensional regime, Geological Society of America: *Geosphere*, **1** (1), 1–22. <http://dx.doi.org/10.1130/ges00006.1>
- Dumurdzanov, N., Stojanov, R., Petrovski, K. (1978): Basic geological map of SFRJ 1:100 000, sheet Kruševo K 34–91, Belgrade.
- Dumurdzanov, N., Stojanov, R., Petrovski, K. (1979): Explanatory note of the General Geological Map of Kruševo 1:100 000 map sheet, Belgrade.
- Ford, D., Williams, P. (2007): *Karst Hydrogeology and Geomorphology*, John Wiley & Sons, Ltd, Chichester, 562 p.
- Gabrovšek, F., Peric, B. (2006): Monitoring the flood pulses in the epiphreatic zone of karst aquifers: the case study of Reka river system, karst plateau, SW Slovenia, *Acta Carsologica*, Ljubljana, **35/1**, 35–45.
- Gičevski, B., Petrič, M., Kogovšek, J. (2016): Interpreting groundwater character from flood pulses and artificial tracer test – A case study of the Slatinski Izvor spring (Republic of Macedonia), *Third Congress of Geologists of Republic of Macedonia*, Struga, vol. **1**, 67–76.
- Hunkeler, D., Mudry, J. (2007): Hydrochemical methods. In: Goldscheider, N. & Drew, D. (ed.) *Methods in Karst Hydrogeology*, Taylor & Francis Group, London, 93–121.
- Kogovšek, J. (2011): Threats to the karst water sources from traffic in normal conditions. In: Knez, M. et al. (eds), *Karstology and Development Challenges on Karst, I – Water*. Karst Research Institute ZRC SAZU, Postojna, 47–64.
- Kresic N, Bonacci, O. (2010): Spring discharge hydrograph. In: Kresic N, Stevanovic Z (eds) *Groundwater Hydrology of Springs, Engineering, Theory, Management, and Sustainability*. Butterworth-Heinemann/Elsevier, New York, 129–164.
- Lopez-Chicano, M., Bouamama, M., Vallejos, A., Pulido-Bosch, A. (2001): Factors which determine the hydrogeochemical behavior of karstic springs. A case study from the Betic Cordilleras, Spain, *Applied Geochemistry*, **16**, 1179–1192.
- Mulec, J., Petrič, M., Koželj, A., Brun, C., Batagelj, E., Hladnik, A., Holko, L. (2019): A multiparameter analysis of environmental gradients related to hydrological conditions in a binary karst system (underground course of the Pivka river, Slovenia), *Acta Carsologica*, **48** (3), Postojna, 313–327.
- Nguyet, V. T., Goldscheider, N. (2006): Tracer tests, hydrochemical and microbiological investigations as a basis for groundwater protection in a remote tropical mountainous karst area, Vietnam, *Hydrogeology Journal*, **1**, 1–13.
- Perrin, J. (2003): *A conceptual model of flow and transport in a karst aquifer based on spatial and temporal variations of natural tracers*, PhD Thesis, University of Neuchâtel, 188 p.
- Petrič, M. (2002): *Characteristics of Recharge-Discharge Relations in Karst Aquifer*, Založba ZRC, Postojna-Ljubljana, 164 p.
- Petrič, M., Ravbar, N., Kogovšek, J. (2011): Characteristics of karst aquifers, their vulnerability and endangerment. – In: Knez, M. et al. (eds), *Karstology And Development Challenges On Karst I – Water*. Karst Research Institute ZRC SAZU, Postojna, 7–19.
- Pratama, A. D., Dwiputra, D. S., Nurkholis, A., Haryono, E., Cahyadi, A., Agniy, R. F., Adji, T. N. (2021): Factors affecting hydrochemistry of karst springs and their relationship to aquifer development. *Environmental Process*, **8** (4): 1379–1413. <https://doi.org/10.1007/s40710-021-00547-7>

Резиме

ПРИРОДНИ ТРАСЕРИ КАКО АЛАТКА ЗА РАЗБИРАЊЕ НА ФУНКЦИОНИРАЊЕТО НА КАРСТНИОТ СИСТЕМ И НЕГОВАТА РАНИВОСТ – СТУДИЈА НА СЛУЧАЈ НА ИЗВОР МАНАСТИРЕЦ

Билјана Гичевски^{1*}, Војо Мирчовски², Славчо Христовски³, Метра Петрич⁴

¹Истражувачко друштво „Урсус спелеос“, Добромир Хрс 20а, 1000 Скопје, Република С. Македонија

²Факултет за природни и технички науки, Универзитет „Гоце Делчев“, Штип, бул. Гоце Делчев 89, 2000, Штип, Република С. Македонија

³Институт за биологија, Природно математички факултет, Универзитет „Св. Кирил и Методиј“ во Скопје, Архимедова 3, 1000 Скопје, Република С. Македонија

⁴Институт за истражување на карсти ZRC SAZU, Тийов прт 2, 6230 Постojна, Република Словенија
biljana_speleo@yahoo.com

Клучни зборови: природни трасери; хидрохемија; карстен извор Манастирец

За карстниот извор Манастирец лоциран во долината на Манастиречка Река, Порече, се анализирани различни хидролошки параметри за време на неколку дождовни периоди во 2015 и 2016 година. Истражувањата на извор-

ската вода покажаа дека природните трасери, како: врнежи, температура на вода, електрична спроводливост и ниво на вода претставуваат соодветен избор во споредба со сложените вештачки трасери. Исто така, нивото на сулфати и

нитрати, како и односот Ca/Mg се значајни природни тра-
сери при мониторингот на транспортот на контаминанти
низ карстниот систем. Следењето на овие параметри се
покажа како добар показател за динамиката и транспортот
на подземните води и загадувачите од зоната на прихра-
нување до изворот. Изворот Манастирец покажува високи
временски варијации на хидролошките, физичките и хе-
миските параметри на водата. Преку хидрографот се гледа
брзо и изразено движење на инфилтрираните врнежи,
преку вадозната зона до изворот. Околу еден ден по изра-
зени врнежи, нивото на водата брзо расте, додека елект-
ричната спроводливост и температурата на водата брзо

опаѓаат. Вредностите на спроводливоста покажуваат брза
реакција поради рапидната циркулација на нова и слабо
минерализирана вода која е инфилтрирана во карстниот
систем. Вредностите за температура на водата се во коре-
лација со електричната спроводливост, што укажува на
прилив на вода од површината на теренот. Истражувањата
покажаа дека разрежувањето и интеракцијата вода-карпа се
контролорачки процеси. Брзото движење на растворените
материи од површината на теренот низ карстниот систем
прават изворот Манастирец да биде силно ранлив од
контаминантите кои доаѓаат од Манастиречка Река.

